







Description:

LED anti-glare downlight comes complete with an external driver in a junction box. Commercial grade quality with architectural design. Air Tight & IC Rated: Deep anti-glare design . Fast & Easy Installation: Save labor cost. Junction Box Included:

Model: DNLRXX11X5CCXXGS

Optical: CCT: Lumen out put:: LED : CRI:

5CCT Tunable, 27K/30K/35K/40K/50K 1000-1100 COB >90Ra

Electrical:

Rated Power: Input voltage: Beam angle: 9W / 12W / 15W 100-130V AC, 50/60HZ 24° / 36°

Life:

Lumen maintenance: Warranty:

General:

Dimmable Solution: Power Factor: Type: Body: Certification: 30,000hrs

2 Years

Triac dimming 5-100% >0.9 IC , Airtight Die cast aluminum alloy for optimal heat dissipation cETLus









PRODUCT TYPES

Size&Shape	Input Power	Lumen	Halogen Equivalent	
2" Round	9 W	600-700	60W	
2" Square	9 W	600-650	60W	
4" Round	12 W	1000-1100	90W	
4" Round	15 W	1200-1350	90W	
4" Square	12 W	1000-1100	90W	
4" Square	15 W	1200-1350	90W	

Family series	Shape	Reflector	Color	Size	Wattage	CCT
	S: Square	B: Baffle	W: White	04:4"	09:9W	
DNL						5C:5CCT
	R: Round	S: Smooth	B: Black	02:2″	12:12W	





PROUDUCT SIZE


Size&Shape	Dimension	Cutout Size
2" Round	Ф80*67mm	Φ70mm
2" Square	Φ80*67mm	Φ70mm
4" Round	Φ122*67mm	Φ102-108mm
4" Square	Ф122*77mm	Φ102-108mm





Due to continuous improvements, the information herein may be changed without notice 831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1(604) 770-3315 | E: info@maxtarlighting.com



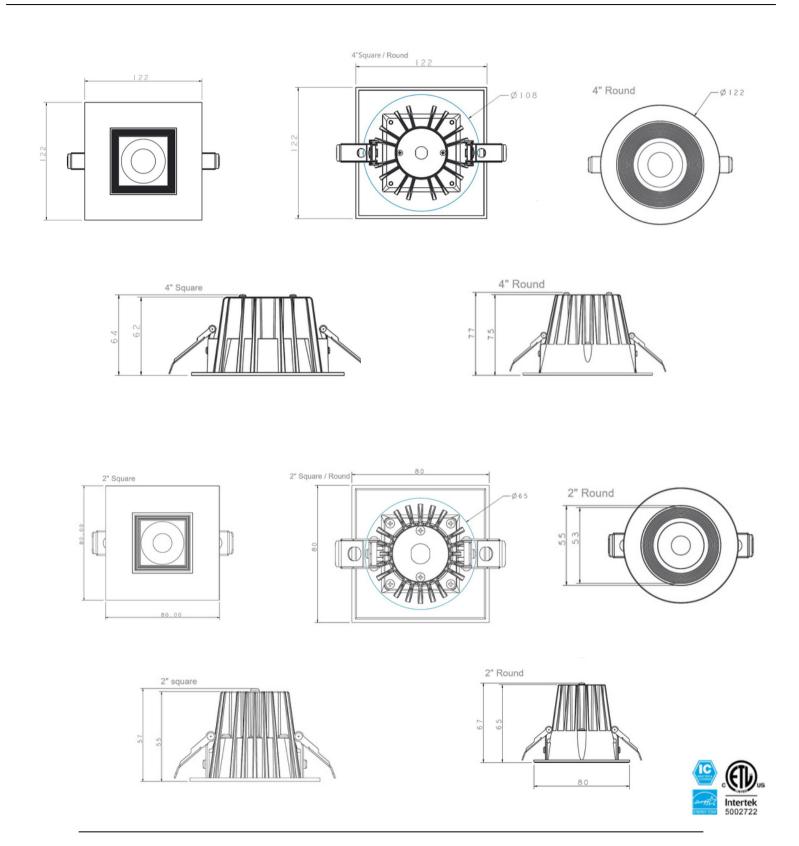

Due to continuous improvements, the information herein may be changed without notice 831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1(604) 770-3315 | E: info@maxtarlighting.com