

Phase cut /Triac dimmable driver-PWM output 30W



Class 2

Class P

TYPE HL

SELV



RoHS





Features

Output:	Constant Voltage
Range:	100-277VAC
PFC design:	Built-in active PFC function
Efficiency:	Up to 79%
Protections:	Short circuit/ over load/ over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	Full protection iron housing, for dry, damp & wet location
Dimming function:	<u>Phase dimming</u> : work with Forward phase, MLV and Reverse phase, ELV, TRIAC dimmers.
Dimming range:	0-100%
Application:	Suitable for the application of LED lighting
Warranty:	2 years warranty
Others:	PWM output, High power factor $PF \geq 0.95$, flicker-free dimming


Specification

Model		PYJD301200SC		PYJD302400SC	
Certificate		UL / cUL / FCC / Class 2 / CE / Class P / SELV / RoHS / Reach			
Output	DC Voltage	12V		24V	
	Voltage Tolerance	±0.5V			
	Voltage Regulation	±0.5%			
	Rated current	2.5A		1.25A	
	Rated power	30W			
	Load Regulation	±2%		±1%	
Input	Voltage Range	100-277VAC			
	Frequency Range	47 - 63Hz			
	Power Factor (Typ.)@ full load	0.99@120VAC	0.98@277VAC	0.99@120VAC	0.97@277VAC
	THD(Typ.) @ full load	<20%			
	Efficiency(Typ.) @ full load	79%@120VAC 277VAC			
	AC Current (Max.)	0.5A@100VAC			
	Inrush Current (Typ.)	7A, 420us@50% 120VAC 277VAC			
Protection	Leakage current	<0.5mA			
	Short Circuit	Shut down o/p voltage, re-power on to recover after fault condition is removed			
	Over Load	≤120% shut down o/p voltage, recovers automatically after fault condition is removed			
Environment	Over temperature	Shell surface temp.100℃±10℃ shut down o/p voltage, automatically recover after cooling			
	Working TEMP.	-40~+60℃ (see below derating curve)			
	Working Humidity	20 - 95%RH non-condensing			
	Storage TEM.,Humidity	-40 - +80℃,10 - 95% RH non-condensing			
	TEMP.coefficient	±0.03%/℃(0 - 50℃)			
Safety & EMC	Vibration	10~500Hz, 5G 12min./1 cycle, period for 72min. each along X,Y,Z axes			
	Safety standards	UL8750 CAN/CSA-C22.2 No.250.13 (US)			
	Withstand voltage	I/P-O/P:1.8KVAC I/P-FG:1.8KVAC O/P-FG:1.8KVAC(US)			
	Isolation resistance	I/P-O/P: 100MΩ / 500VDC / 25℃ / 70% RH			
Others	EMC Emission	FCC Part 15 ,Subpart B(US)			
	Net Weight	0.90Kg			
	Dimension	165*95.4*43.8mm (L*W*H)			
Notes	Packing	415*245*270mm 20 pcs/CTN 19.8KG/CTN			
		1. All parameters NOT specially mentioned are measured at 120VAC input,rated load and 25℃of ambient temperature. 2. Tolerance: includes set up tolerance and load regulation .			

Efficiency Curve (efficiency vs output load)

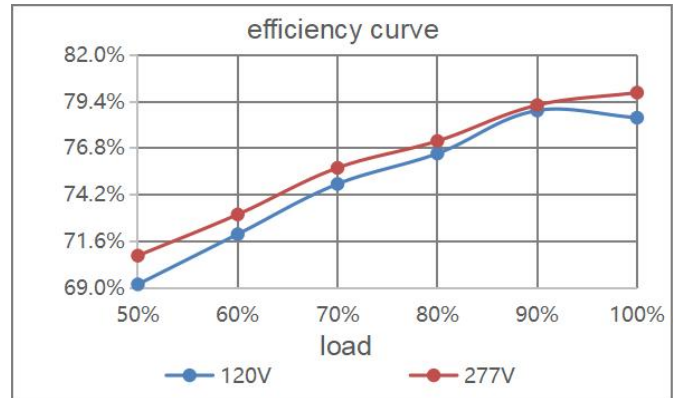
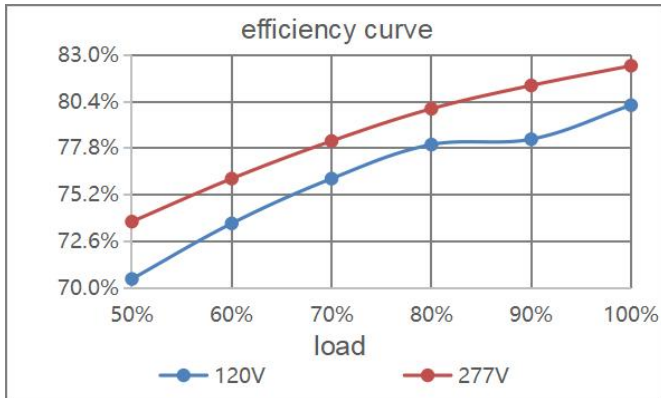


Derating Curve (output load vs TEMP.)

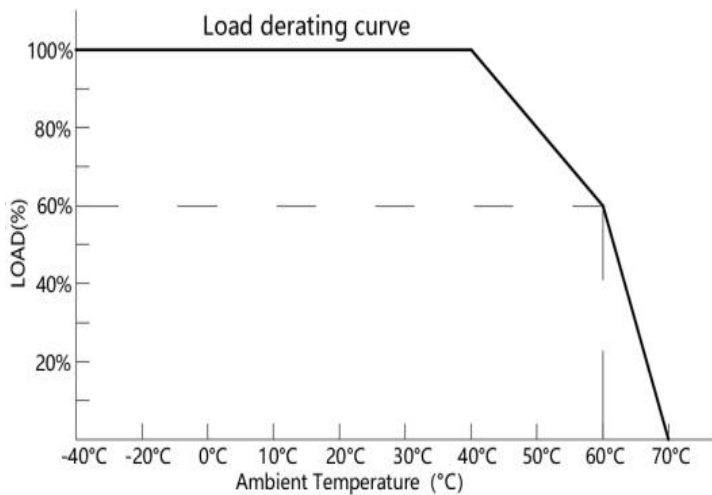


1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. Please note that the rise in temperature of LED fixtures over a long period of time will cause their power to rise. Therefore, we recommend the power supply to reserve a certain amount of load to avoid overloading.

Power factor curve

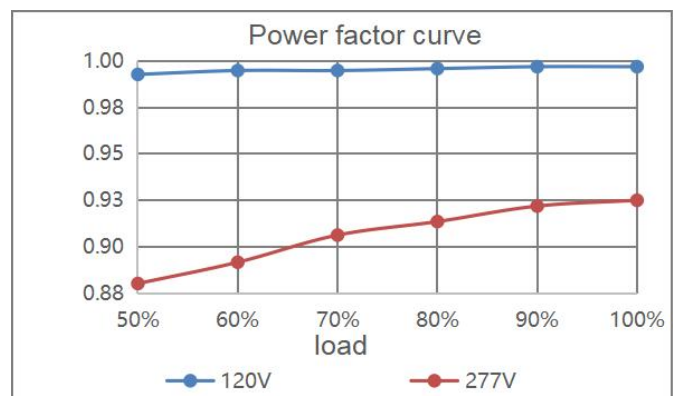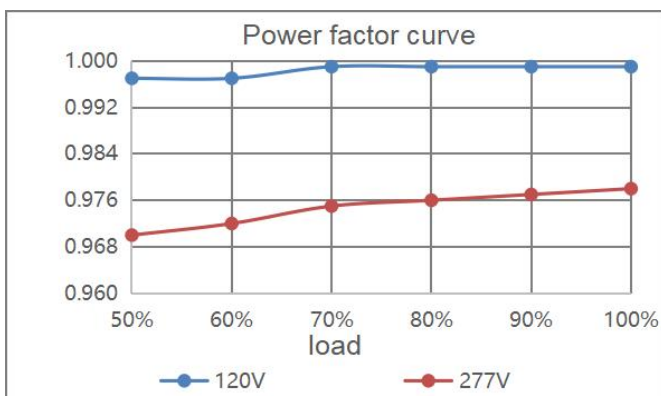

Mechanical Specification

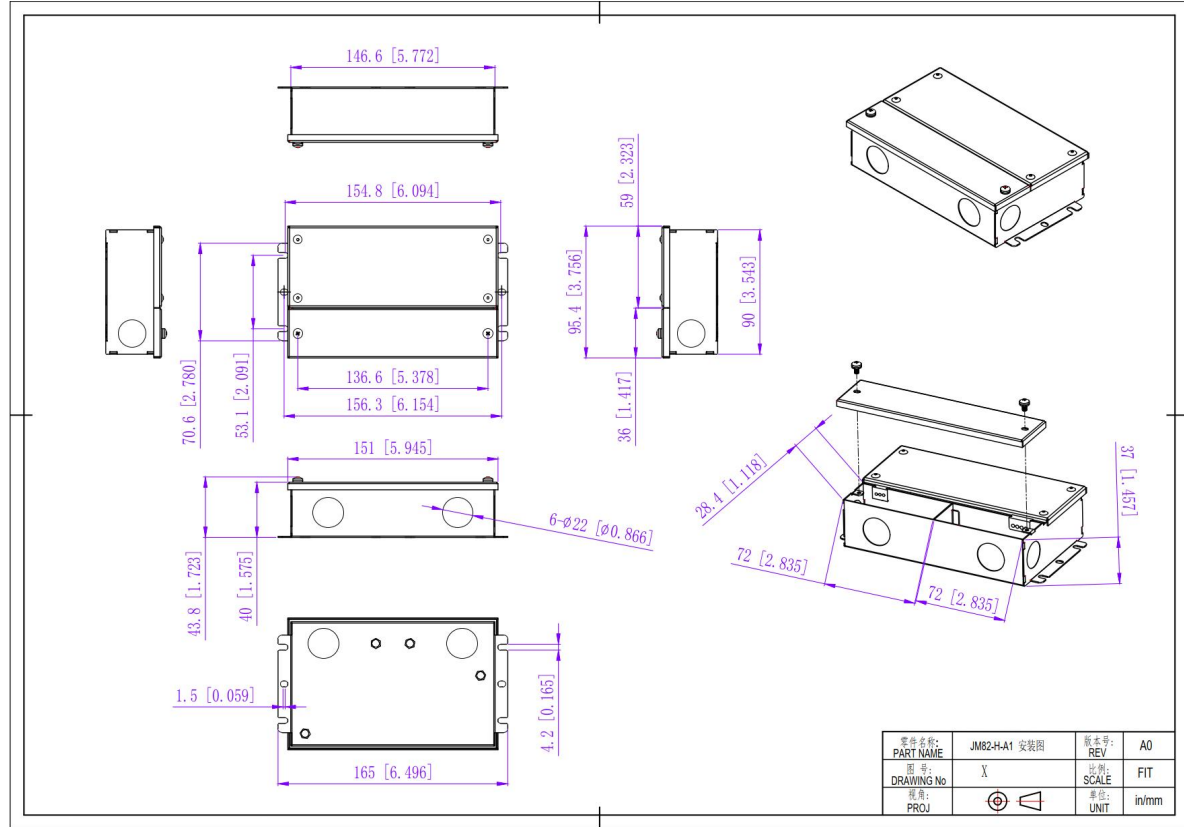



12V&24V Version

1. Input wire 18AWG, Black and White to be connected to AC L and N, Green wire go ground.
2. Output wire 18AWG, Red to LED Positive side (+) , Black to LED Negative side (-).
3. Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.

Dimming Operation and Connecting Diagram

TRIAC/Phase cut dimming

1. The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase /Triac dimmer or lighting system.
2. Working with Forward phase, MLV and Reverse phase, ELV, TRIAC dimmers.
3. Min. loading is about 10%.
4. Please try to use dimmers with power at least 1.5 times as the output power of the driver.

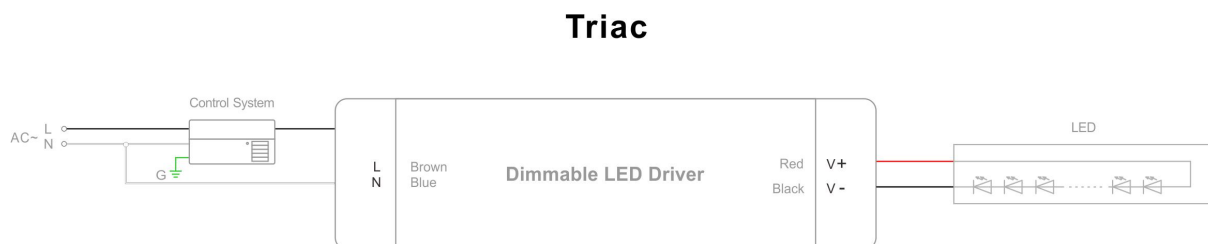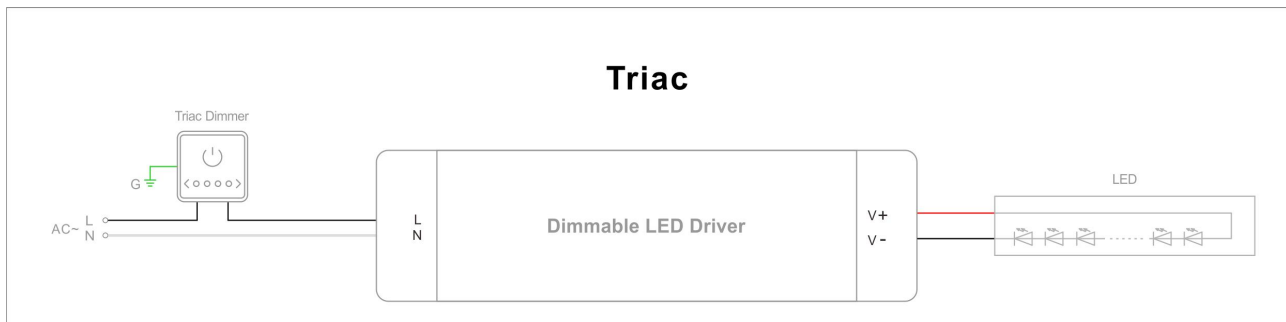

Instruction

1. This driver should be installed by qualified and professional person.
2. Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that wiring is correct before test in order to avoid light and power supply damage.
4. If driver Cannot work normally, don't maintain privately.