



LED GIMBALE DOWNLIGHT 3"





Description:

This Gimbal Downlight is a 7 watt 3" lighting fixture for recess retrofit application. It is a high performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design, Suitable for damp locations

Model: DNLG0711035CBKLP

Optical:

 CCT:
 5CCT Tunable

 Lumen out put:
 560LM

 Lumen Efficacy:
 80LM/W

 LED Type:
 COB

 CRI:
 ≥80



Rated Power: 7W

Input voltage: 100-130V 60HZ

Beam angle: 36°

Life:

Lumen maintenance: 50,000 Hours Warranty: 2 Years

General:

Dimmable Solution: 5%-100% dimming capability

: IP44

Operating temperature: -40°C~40°C(-4°F~105°F)

Finish color Availability: White, Black

Certification: ETL, Energy Star, FCC

Type: IC





















LED GIMBALE DOWNLIGHT 3"



DRAWING

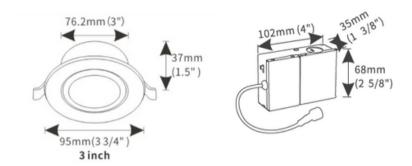

IINSTALLATION

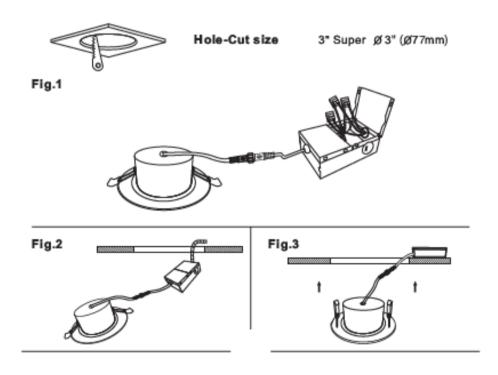





LED GIMBALE DOWNLIGHT 3"



PHOTOMETRY





Luminous Intensity Distribution Diagram - At 3000K:

Note: The Curves Indicate the illuminated Area and the Average illumination When the Luminaire is a Different Distance At 3000K

LED DRIVER:

