

**LED GIMBALE DOWNLIGHT 3"****Description:**

This Gimbal Downlight is a 7 watt 3" lighting fixture for recess retrofit application. It is a high performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design, Suitable for damp locations

Model: DNLG0700035CXXLP**Optical:**

CCT:	5CCT Tunable
Lumen out put:	560LM
Lumen Efficacy:	80LM/W
LED Type:	COB
CRI:	≥80

**Electrical:**

Rated Power:	7W
Input voltage:	100-130V 60HZ
Beam angle:	36°

Life:

Lumen maintenance:	50,000 Hours
Warranty:	2 Years

General:


Dimmable Solution:	5%-100% dimming capability
IP:	IP44
Operating temperature:	-40°C~40°C(-4°F~105°F)
Finish color Availability:	White, Black
Certification:	ETL, Energy Star, FCC
Type:	IC







LED GIMBALE DOWNLIGHT 3"

DRAWING

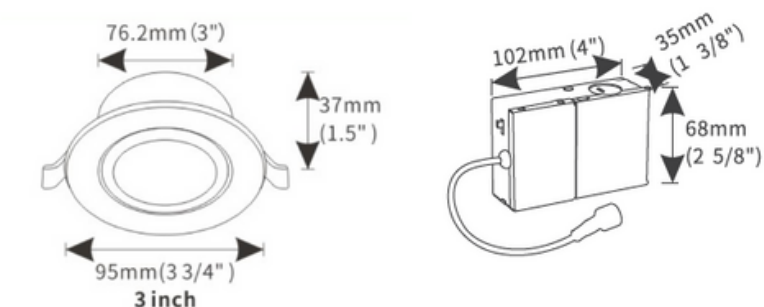



INSTALLATION

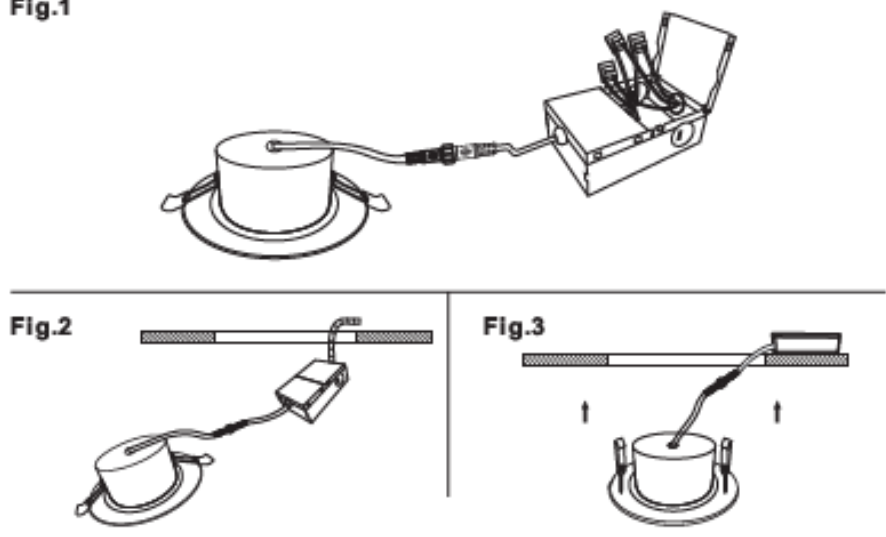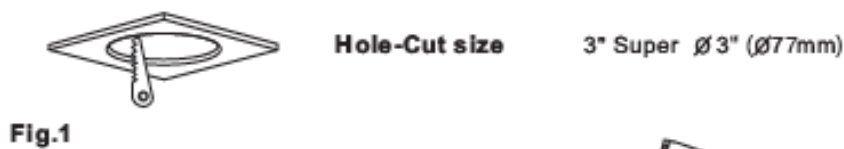



LED GIMBALE DOWNLIGHT 3"

PHOTOMETRY

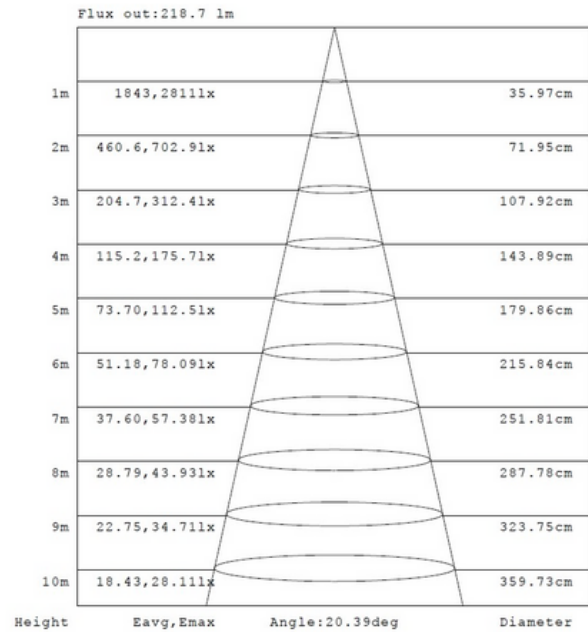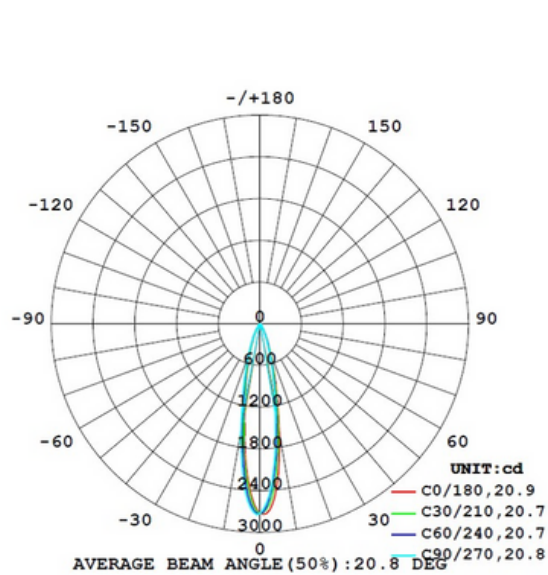

Luminous Intensity Distribution Diagram - At 3000K:

Note: The Curves Indicate the illuminated Area and the Average illumination When the Luminaire is a Different Distance At 3000K

LED DRIVER:

