



LED SQUARE GIMBALE DOWNLIGHT 3"

Description:

This square Gimbal Downlight is a 7 watt 3" lighting fixture for recess retrofit application. It is a high performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design, Suitable for damp locations



Model: DNLGS07C3205CWHLP

Optical:

CCT: 5CCT Tunable
Lumen out put: 560LM
Lumen Efficacy: 80LM/W
LED Type: COB
CRI: ≥80



Electrical:

Rated Power: 7W
Input voltage: 100-130V 60HZ
Beam angle: 36°

Life:

Lumen maintenance: 50,000 Hours
Warranty: 2 Years

General:


Dimmable Solution: 5%-100% dimming capability
IP: IP44
Operating temperature: -40°C~40°C(-4°F~105°F)
Finish color Availability: White, Black
Certification: ETL, Energy Star, FCC
Type: IC







LED SQUARE GIMBALE DOWNLIGHT 3"

DRAWING

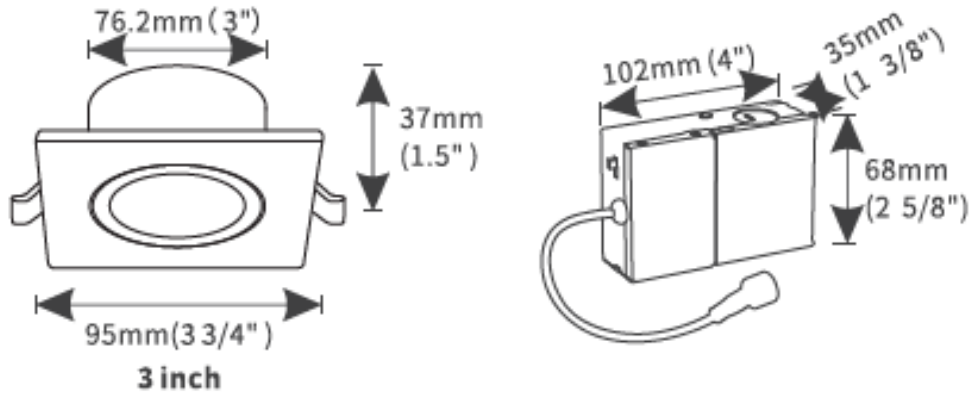



IINSTALLATION

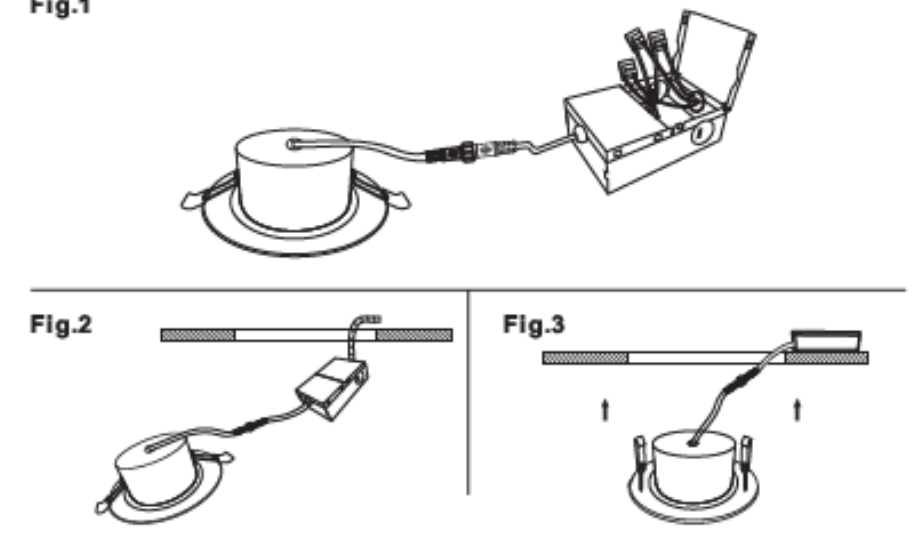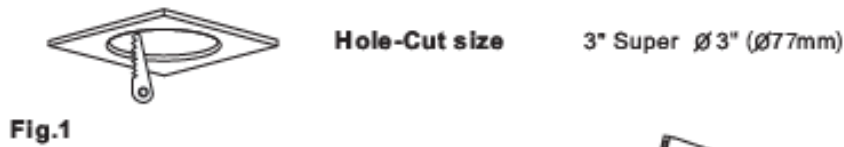



LED SQUARE GIMBALE DOWNLIGHT 3"

PHOTOMETRY

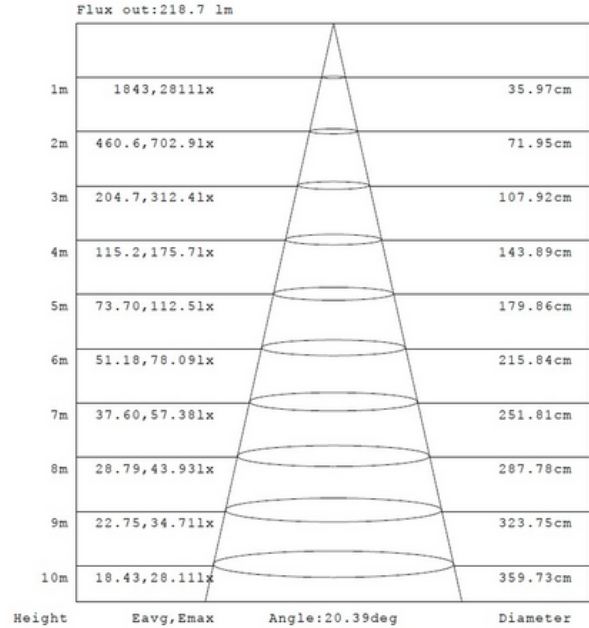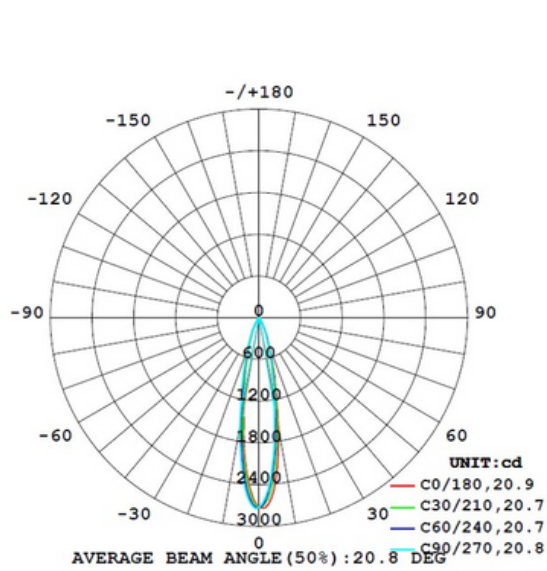

Luminous Intensity Distribution Diagram - At 3000K:

Note: The Curves Indicate the illuminated Area and the Average illumination When the Luminaire is a Different Distance At 3000K

LED DRIVER:

