

**Aximo 345R****Description:**

Durable airtight aluminum body with etched white PMMA diffuser lens for low glare. 1%-100% dimming capability. This general application light fixture features 11watt LED module that maintains uniform intensity producing up to 913 lumens; with a typical CRI of 80/90. The fixture lens provides 15° / 24° / 36° beam spread. Includes two spring loaded clips to attached to any ceiling material

**Model: AX-345R****Optical:**

CCT:	5CCT
Lumen out put:	1020LM@4000K
Lumen Efficacy:	85LM/W
LED Type:	COB
CRI:	80Ra/90Ra

Electrical:

Rated Power:	12W
Input voltage:	AC120V / 60Hz
Beam angle:	15° / 24° / 36°
Power factor/THD/PE:	>90% / <30 / 70%

Life:


Lifespan:	50,000hrs
Warranty:	2 Years

General:

Dimmable Solution:	Triac
IP:	IP44
Operating temperature:	-20°C~+40°C
Storage temperature:	-40°C~+85°C
Finish color Availability:	White/Black/Silver/Brushed Nickel
Size:	3 $\frac{1}{8}$ "(87mm)
Cut size:	2 $\frac{1}{8}$ "(75mm)



0°-30° Tilt, 350° Orientation




Anti-glare design






Aximo 345R

INSTALLATION

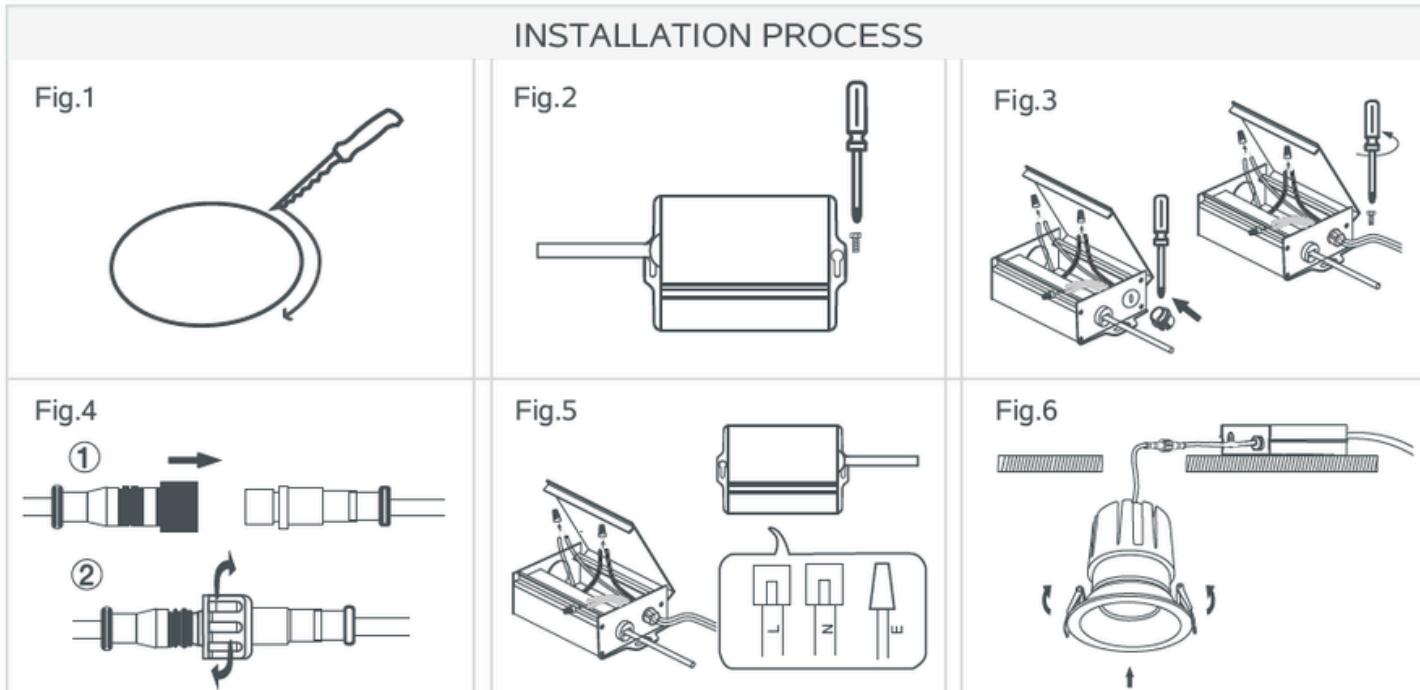

LIGHTING PERFORMANCE

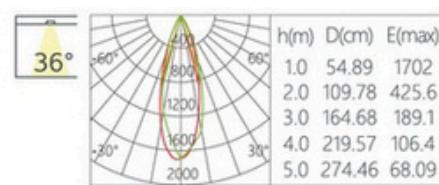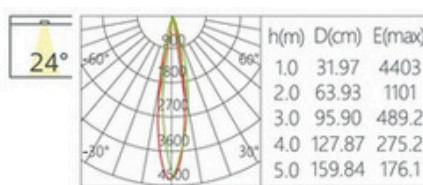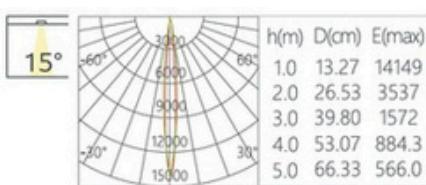

Narrow Spot 15°



Narrow 24°



Medium 36°

