

LED LINEAR STRIP LIGHT G2





Description:

Introducing a versatile lighting solution for effortless installation and customization. This second-generation design, with a neater look and slimmer size, features an integrated LED system with a snap-lock diffuser lens, ensuring secure and hassle-free assembly. Tailor brightness and tone with adjustable power and color temperature (CCT) to meet specific needs. Options available for this fixture include a microwave motion sensor and battery backup for added versatility.

Model: LRL4011043CG2TO

Optical:

Lumen Efficacy:130 LM/WLED Type:SMDCRI:≥80

Electrical:

Input voltage: 110-277V - 120-347V / 50/60HZ

Power 28/32/40 watt tunable Beam angle: 110° Dir Light Only

Power factor: > 0.9

Life:

Lumen maintenance: 50,000h Warranty: 2 Years

General:

Operating temperature: 20 to 45°C Finish color Availability: White

Certification: UL, CUL, FCC, DLC

Specification:

- UL Listing:
- · Suitable for damp locations
- LEDs:
- Long-life, high-efficacy, micro-power LEDs
- · Lifespan:
- Lumen Maintenance, L70 > 100,000 hours
- Dimming Driver:
- Driver includes dimming control wiring for 0-10V dimming systems. The dim-tooff voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.
- Housing:
- Sheet metal stamping















LED LINEAR STRIP LIGHT G2



2FT	3500K	20W 4000K	5000K						
Lumens	2600	2620	2640						
Efficacy (Im/W	130	131	132						
3FT		25W							
Lumens	3500K	4000K	5000K						
Efficacy (Im/W	3250	3275	3300						
	130	131	132						
							1		
4FT		30W			35W			45W	
Lumens	3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
Efficacy (Im/W)	3900	3930	3960	4550	4585	4620	5850	5895	5940
	130	131	132	130	131	132	130	131	132
8FT		65W			75W			90W	
0									
Lumens	3500K	40001	< 5000K	3500K	4000K	5000K	3500K	4000K	5000K
Efficacy (Im/W)	8450	8515	8580	9750	9825	9900	11700	11790	11880
	130	131	132	130	131	132	130	131	132

Ordei	ring table		Sample : LRLG2-4-40-347-3C-W			
Modle	Lengh Wattage		Voltage	ССТ	Options	
LRLG2	2ft :2 3ft :3 4ft: 4 8ft: 8	20W:20 25W:25 28W-32W-40W :40 55W-60W-65W: 65	120-277:UNV 120-347 : 347	3CCT : 3C	Battery : B Sensor : S Wire guard : W	





LED LINEAR STRIP LIGHT G2



DIMANSION:

Length:

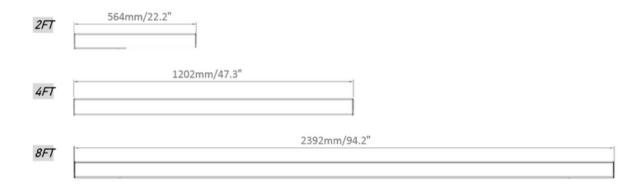



PRODUCT WEIGHT(Kg/lb.)

Product series	2FT	3FT	4FT	8FT
STR2-W	1.20/2.65	1.60/3.53	2.00/4.41	3.85/8.49



