



Lumenza 4

Description:

Introducing a versatile lighting solution for effortless installation and customization. This second-generation design, with a neater look and slimmer size, features an integrated LED system with a snap-lock diffuser lens, ensuring secure and hassle-free assembly. Tailor brightness and tone with adjustable power and color temperature (CCT) to meet specific needs. Options available for this fixture include a microwave motion sensor and battery backup for added versatility.

Model: LRL4011043CG2TO

Optical:

| | |
|-----------------|----------|
| Lumen Efficacy: | 130 LM/W |
| LED Type: | SMD |
| CRI: | ≥80 |

Electrical:

| | |
|----------------|-----------------------|
| Input voltage: | 120-347V / 50/60HZ |
| Power | 25/30/40 Watt tunable |
| Beam angle: | 110° Dir Light Only |
| Power factor: | > 0.9 |

Life:

| | |
|--------------------|---------------------|
| Lumen maintenance: | L70 > 100,000 hours |
| Warranty: | 3 Years |

General:

| | |
|----------------------------|-------------------|
| Operating temperature: | 20 to 45°C |
| Finish color Availability: | White |
| Certification: | UL, CUL, FCC, DLC |

Specification:

- UL Listing:
- Suitable for Dry/Damp locations
- Long-life, high-efficacy, micro-power LEDs
- Lumen Maintenance, L70 > 100,000 hours
- Driver includes dimming control wiring for 0-10V dimming systems. The Dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.
- Sheet metal stamping





LED LINEAR STRIP LIGHT G2

| | | | | | | | | | |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 2FT | 20W | | | | | | | | |
| | 3500K | 4000K | 5000K | | | | | | |
| Lumens | 2600 | 2620 | 2640 | | | | | | |
| Efficacy (lm/W) | 130 | 131 | 132 | | | | | | |
| 3FT | 25W | | | | | | | | |
| | 3500K | 4000K | 5000K | | | | | | |
| Lumens | 3250 | 3275 | 3300 | | | | | | |
| Efficacy (lm/W) | 130 | 131 | 132 | | | | | | |
| 4FT | 30W | | | 35W | | | 45W | | |
| | 3500K | 4000K | 5000K | 3500K | 4000K | 5000K | 3500K | 4000K | 5000K |
| Lumens | 3900 | 3930 | 3960 | 4550 | 4585 | 4620 | 5850 | 5895 | 5940 |
| Efficacy (lm/W) | 130 | 131 | 132 | 130 | 131 | 132 | 130 | 131 | 132 |
| 8FT | 65W | | | 75W | | | 90W | | |
| | 3500K | 4000K | 5000K | 3500K | 4000K | 5000K | 3500K | 4000K | 5000K |
| Lumens | 8450 | 8515 | 8580 | 9750 | 9825 | 9900 | 11700 | 11790 | 11880 |
| Efficacy (lm/W) | 130 | 131 | 132 | 130 | 131 | 132 | 130 | 131 | 132 |



| Ordering table | | | | Sample : LRLG2-4-40-347-3C-W | |
|----------------|--------------------------------------|--|------------------------------|------------------------------|--|
| Modle | Lengh | Wattage | Voltage | CCT | Options |
| LRLG2 | 2ft :2 3ft :3 4ft: 4 8ft: 8 | 20W:20 25W:25 28W-32W-40W :40 55W-60W-65W: 65 | 120-277:UNV 120-347 : 347 | 3CCT : 3C | Battery : B Sensor : S ¹ Wire guard : W |



1: Built in motion sensor :Motion -> 100%, No Motion >= 5min -> dim to 30%. No Motion >= 60min -> Off



LumenzaArc4

DIMANSION:

Length:

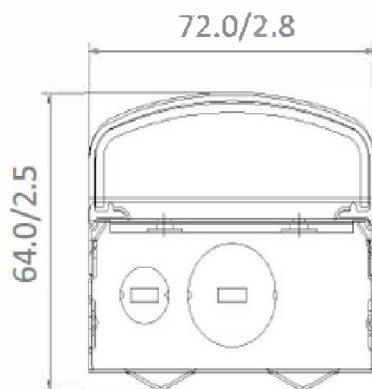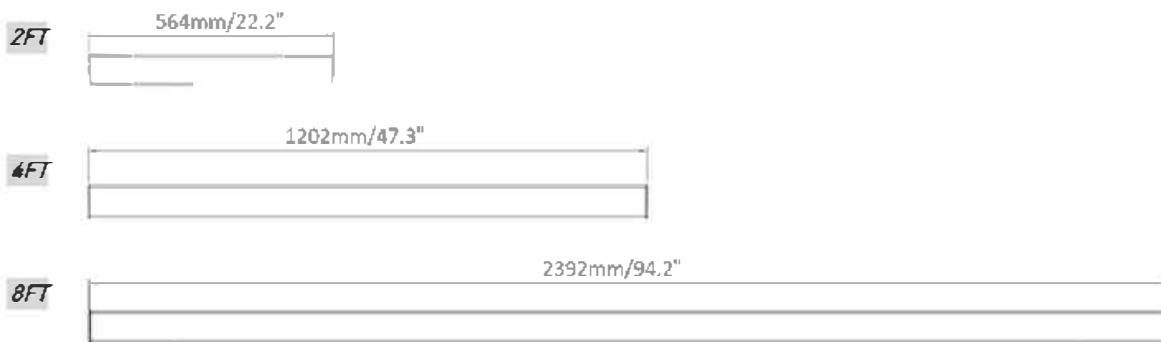

PRODUCT WEIGHT(Kg/lb.)

| Product series | 2FT | 3FT | 4FT | 8FT |
|----------------|-----------|-----------|-----------|-----------|
| STR2-W | 1.20/2.65 | 1.60/3.53 | 2.00/4.41 | 3.85/8.49 |

