



PYJD - TDL Series 150W

Phase cut /Triac dimmable driver-PWM output

Features

- Output constant voltage ·Universal AC input: 100-130VAC
 - Power Factor: up to 0.60
 - High efficiency :up to 84%
 - Protection: short circuit/over loading/over current/ Over temperature
 - Full protection aluminum housing
 - Easy installation
 - Cooling by free air convection
 - Compatible with Forward & Reverse phase, Triac, ELV Dimmers
 - Strong compatibility, flicker-free dimming
 - Suitable for LED lighting and moving sign applications and others
- Compliance to worldwide safety regulations for lighting



Specification

Model		PYJD-12150-TDL	PYJD-24150-TDL	PYJD-36150-TDL	PYJD-48150-TDL
Certificates		ETL、CETL、FCC	ETL、CETL、FCC	ETL、CETL、FCC	ETL、FCC
output	DC Voltage	12V	24V	36V	48V
	Voltage Tolerance	±0.5V			
	Rated current	12.5A	6.25A	4.17A	3.1A
	Rated power	150W			
input	Voltage Range	100~130VAC			
	Frequency Range	50~60HZ			
	PowerFactor Typ.	PF≥0.60			
	Efficiency Typ.	83%	84%	84%	84%
	ACCurent Typ.	2.74A	2.71A	2.71A	2.71A
	Leakage current	< 0.70mA/110VAC			
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed			
	Over Current	≤1.4*I out			
	Over Loading	≤120%			
	Over temperature	100°C±10°C (The output voltage will turn off when the temperature is higher than 100°C±10°C, after the temperature drop off ,it will recovery) automatic			
Environment	Working TEMP.	-40~+60°C			
	Working Humidity	20~90%RH, non-condensing			
	Storage TEMP. Humidity	-40~+80°C, 10~95%RH			
	TEMP .coefficient	±0.03%/°C (0~50°C)			
	Vibration	10~500Hz, 2G 10min./1 cycle,period for 60min. each along X,Y,Z axes			
Safety& EMC	Safety standards	UL1012			
	Withstand voltage	I/P-O/P:1500KVAC			
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH			
	EMC EMISSION	FCC Part 15 B			
others	Net. Weight	1.38Kg			
	Size	230*70*46mm (L*W*H)			
	packing	305*260*210 10PCS/CTN			




PYJD - TDL Series 150W

Phase cut /Triac dimmable driver-PWM output

Notes

1. All parameters if NOT specially mentioned are measured at 110VAC input , rated load and 25 temperature.
2. To extend the driver's using life ,please reduce the loading at lower input voltage.
3. Loading should be 5-100%.

■150W Phase/Triac Dimmable driver Mechanical Specification

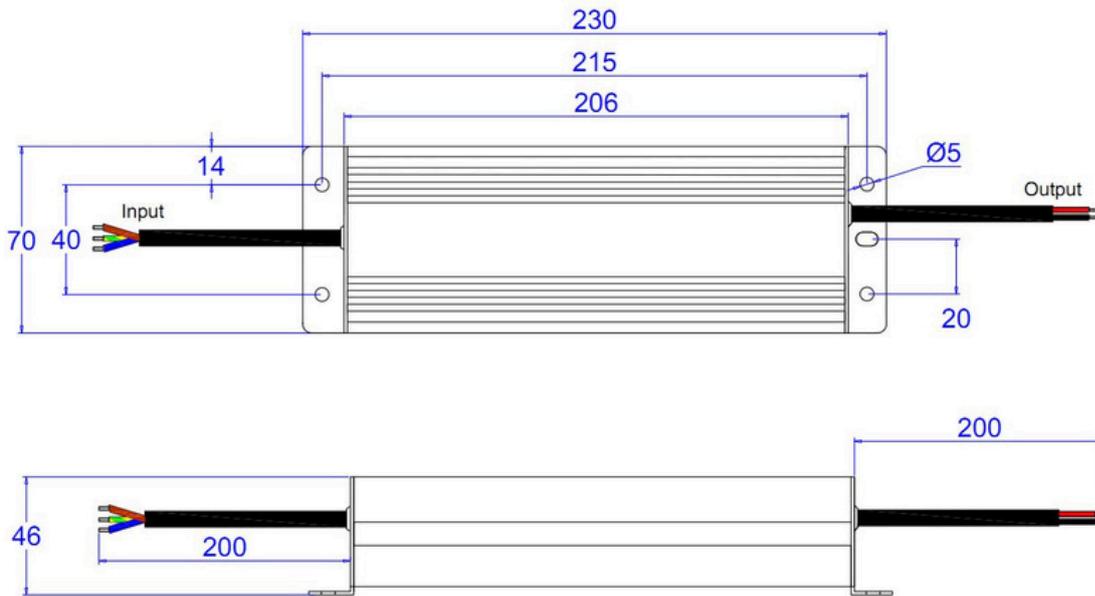

※ Input black(L) and white(N) wires to be connected AC, Green wire to be connected ground; output red and black wires to be connected led lighting.

■ Real picture & Mechanical Specification of 150W Phase/Triac Dimmable Driver with junction box



■Dimming Operation

- ※ Output constant current level can be adjusted through input terminal of the AC phase line(L) by connection a phase/triac dimmer.
- ※ Forward phase and Reverse phase, ELV, Triac Dimmers




PYJD - TDL Series 150W

Phase cut /Triac dimmable driver-PWM output

Warning


- ※ Prevent to reverse polarity; Output polarity: RED "+"; BLACK "-"
- ※ Risk of Electric Shock. When used outdoors, install only on a circuit protected by a Class A GFCI;
- ※ Risk of Fire. Installation involves special wiring methods to run wiring through a building structure. Consult a qualified electrician;
- ※ Risk of Electric Shock. Mount the unit at a height greater than 1 foot from the ground surface.

Derating Curve

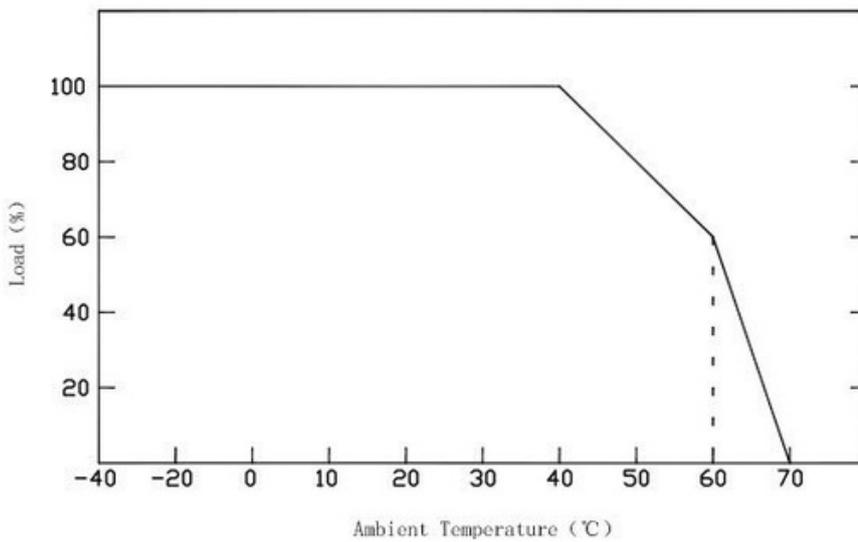

※ To extend their life, please refer to the Derating Curve and derate according to the temperature.

Connecting Diagram

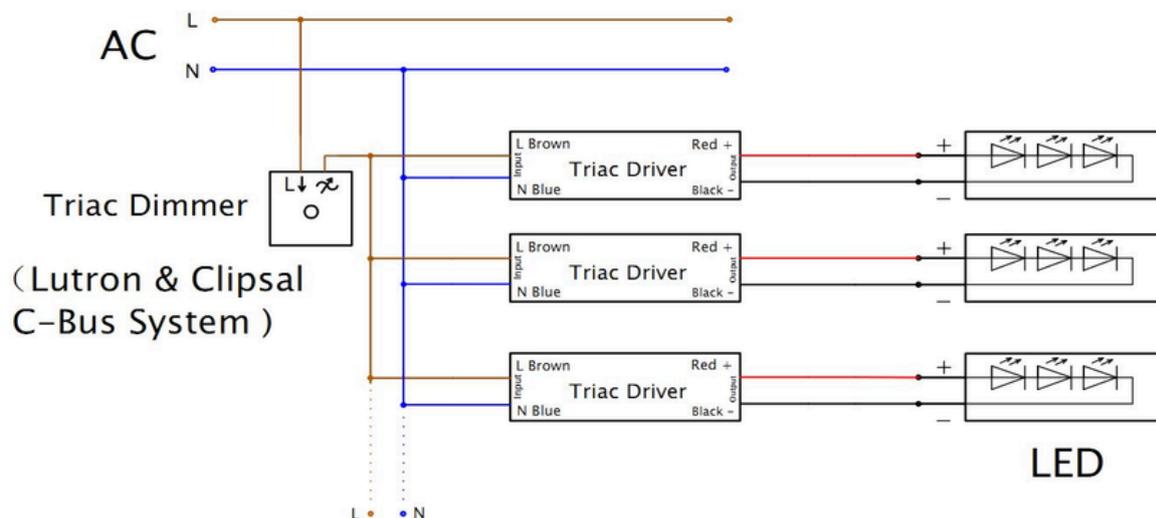



PYJD - TDL Series 150W

Phase cut /Triac dimmable driver-PWM output

