



LumaFlex Gimbal 445S



Description:

This square Gimbal Downlight is a 9 watt 4" lighting fixture for recess retrofit application. It is a high performance, easy to install residential grade downlight solution that offers good light output, energy efficiency and stream lined design, Suitable for damp locations



Model: DNLGS0700035CBKLP

Optical:

CCT:	5CCT Tunable
Lumen out put:	720LM
Lumen Efficacy:	80LM/W
LED Type:	COB
CRI:	≥80

Electrical:


Rated Power:	9W
Input voltage:	100-130V 60HZ
Beam angle:	15°/24°/36°

Life:

Lumen maintenance:	50,000 Hours
Warranty:	2 Years

General:

Dimmable Solution:	5%-100% dimming capability
IP:	IP44
Operating temperature:	-40°C~40°C(-4°F~105°F)
Finish color Availability:	White, Black
Certification:	ETL, Energy Star, FCC
Type:	IC


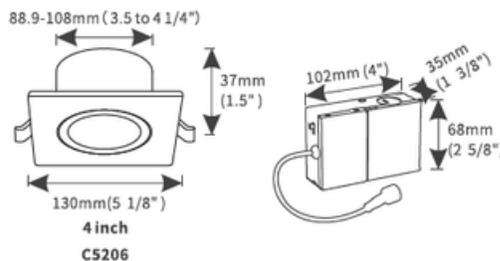






LumaFlex Gimbal 445S



PHOTOMETRY

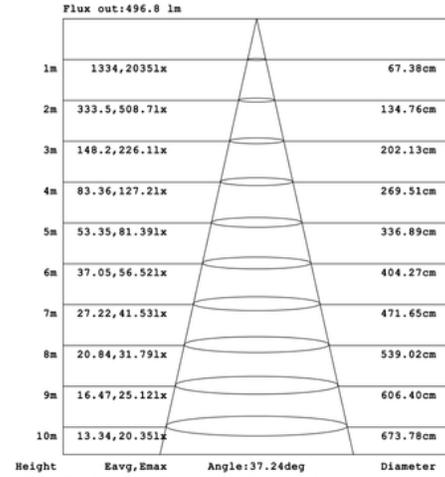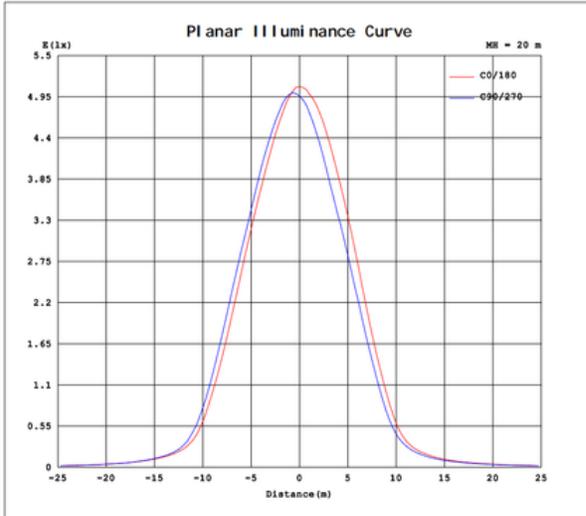

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

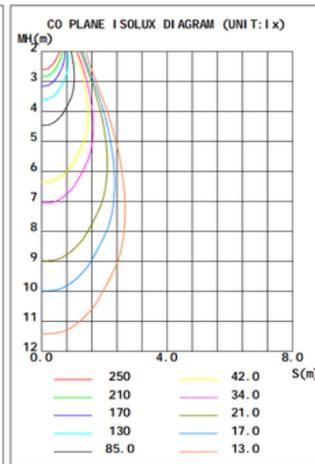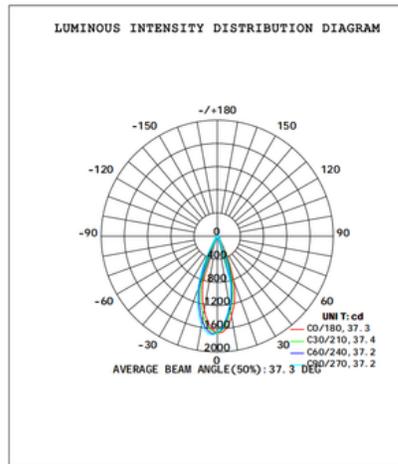

INSTALLATION



Hole-Cut size

4" Super \varnothing 4" (\varnothing 100mm)

Fig.1

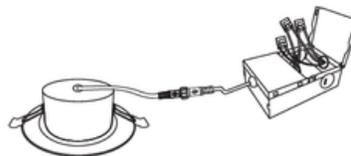


Fig.2




Fig.3

