



**PYJD - TDL Series 300W**

**Phase cut /Triac dimmable driver-PWM output**

**Features**

- Output constant voltage
- UL, cUL listed, Class P, Type HL
- Universal AC input: 110-277VAC
- Power Factor: up to 0.99
- High efficiency : up to 88%
- Dimming range: 0-100% · Load: 10-100%
- Protection: short circuit/over loading/ Over temperature
- PWM output, does not change the color index
- Full protection aluminum housing, for dry, damp location
- Flicker-free
- Compatible with Forward phase, Reverse phase, Triac, MLV, ELV Dimmers
- Cooling by free air convection
- Suitable for LED lighting and moving sign applications



**Specification**

Model		PYJD-12300- DWJV2	PYJD-24300-TDWJV2
Certificates		FCCULcUL	FCCULcUL
Output	DC Voltage	12V	24V
	Rated Current	25A	12.5A
	Rated Power	300W	
	Voltage Tolerance	±0.5V	
	Voltage Regulation	±0.5%	
	Load Regulation	±2%	±1%
Input	Voltage Range	110-277VAC	
	Frequency Range	47-63Hz	
	Power Factor (Typ.) @ full load	0.99@120VAC 0.97@277VAC	0.99@120VAC 0.97@277VAC
	THD (Typ.) @ full load	<20%	
	Efficiency (Typ.) @ full load	86%	88%
	AC Current (Max.)	3.4A@110VAC	
	Inrush Current (Typ.)	20A, 50%, 1.9ms	
	Leakage current	<0.50mA	
Protection	Short Circuit	shut down o/p voltage, re-power on to recover after fault condition is removed	
	Over Loading	≤120% Hiccup mode, recovers automatically after fault condition is removed	
	Over temperature	100°C±10°C shut down o/p voltage, automatically recover after cooling.	
Environment	Working TEMP.	-40~+60°C (see below derating curve)	
	Working Humidity	20~90% RH, non-condensing	
	Storage TEMP. Humidity	-40~+80 °C, 10~95%RH	
	TEMP. coefficient	±0.03%/°C (0~50°C)	
	Vibration	10~500Hz, 5G 10min./1 cycle, period for 60min. each along X,Y,Z axes	
Safety& EMC	Safety standards	UL 8750	
	Withstand voltage	I/P-O/P:1.88KVac	
	Isolation resistance	I/ P-O/ P:100M Ω/ 500VDC/ 25 °C/ 70%RH	
	EMC EMISSION	FCC Part 15 B	
others	Net. Weight	Driver:about1.7KG	Driver+Junctionbox:about2.4KG
	Size	Driver276*78*47mm(L*W*H)	Junctionbox453*87*60mm(L*W*H)
	packing	10PCS/ CT N	




## PYJD - TDL Series 300W

### Phase cut /Triac dimmable driver-PWM output

<b>Notes</b>	<p>1. All parameters if NOT specially mentioned are measured at 120VAC input , rated load and 25°C of ambient temperature.</p> <p>2. To extend the driver's using life ,please reduce the loading at lower input voltage.</p>
--------------	---

#### Derating Curve

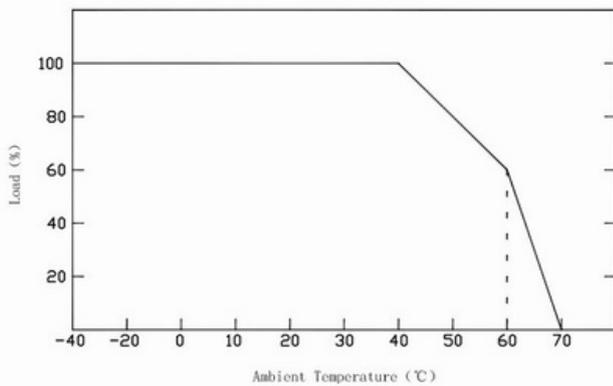


※ To extend their life, please refer to the Derating Curve and derate according to the temperature.

#### Mechanical Specification

Unite: mm


Tolerance:P 0.5-2mm

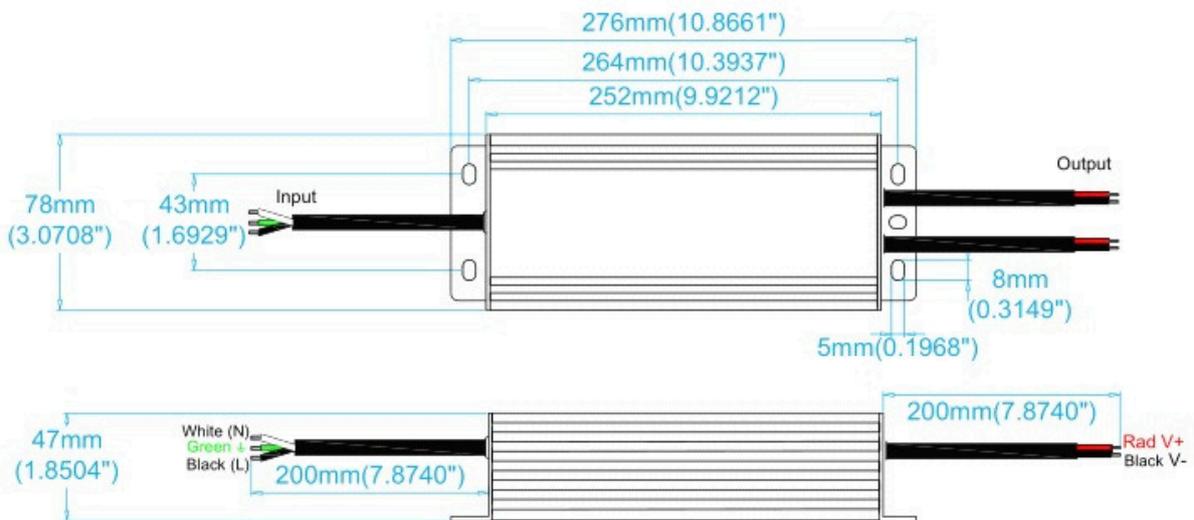



**PYJD - TDL Series 300W**

Phase cut /Triac dimmable driver-PWM output

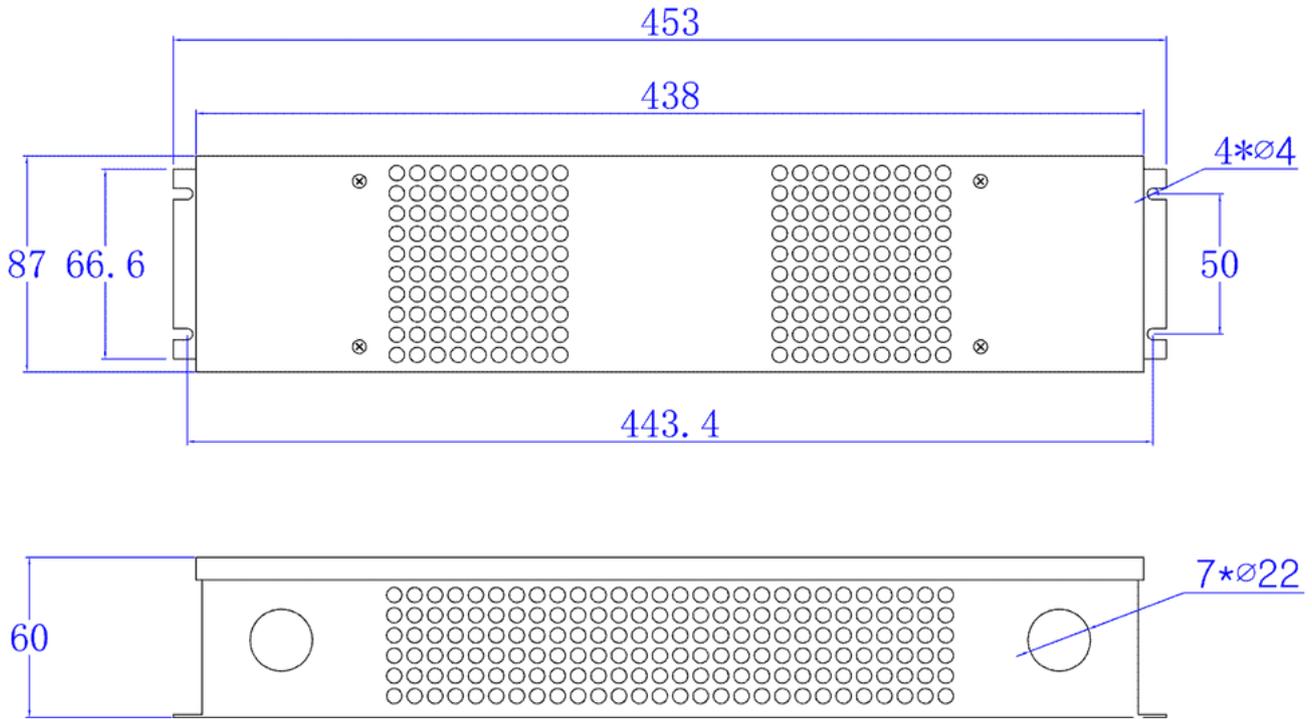


J30 Junction box

- ※ Input Rubber wire 3\*18AWG Black and White to be connected to AC L and N ,Green wire go ground,
- ※ Output Rubber wire, 2\*14AWG Red to LED Positive side (+) , Black to LED Negative side (-). (noted that 12V 300W is with 2 group of 2\*14AWG output wires to separate the output current.)

■ **Dimming Operation**

- ※ The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase/triac dimmer.
- ※ Usually matching with Forward phase , leading edge , Magnetic low voltage, triac dimmers, or Reverse phase, trailing edge ,Electric low voltage Dimmers.
- ※ Please try to use dimmers with power at least 1.5 times as the output power of the driver.



■ **Connecting Diagram**

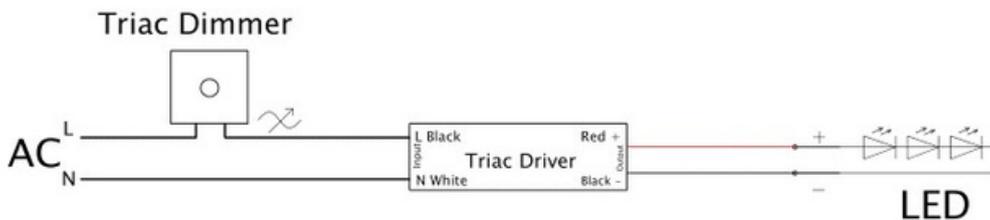



## PYJD - TDL Series 300W

### Phase cut /Triac dimmable driver-PWM output

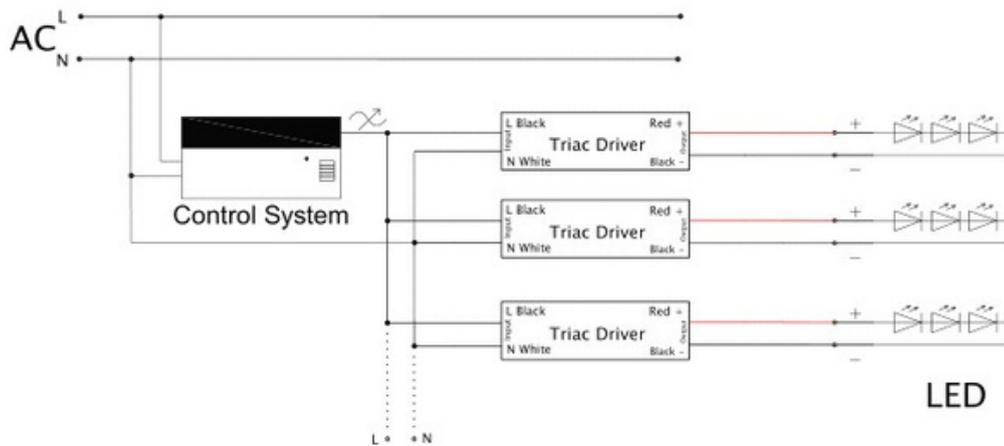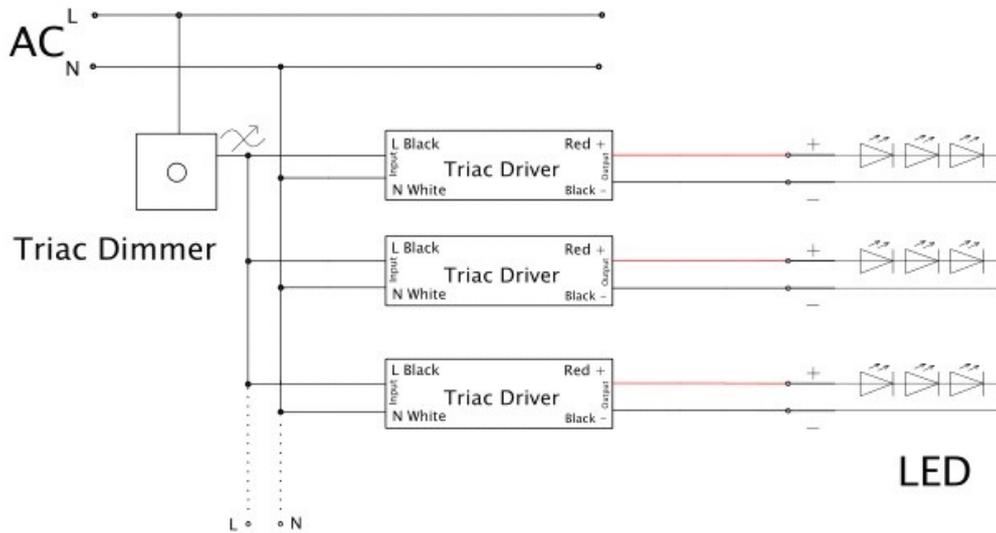

#### **Instruction**

- This driver should be installed by a qualified and professional person;
- Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- Ensure that wiring is correct before test in order to avoid light and power supply damage;