

**Clarro****Description:**

An all-in-1, low-profile, linear and narrow wraparound with 9 possible color/lumen configurations standard. Comes with decorative endcaps with integrated link ability and a frosted diffuser providing widespread, uniform illumination. Ideal for many applications including corridors, kitchens, breakrooms, utility work areas and stairways. Color and Lumen Switching, Linkable Low Profile LED Wrap

**Model: Clarro****Optical:**

CCT:	3 CCT 35K/ 40K/ 50K
Lumen out put:	3680- 4600-5520LM
Lumen Efficiency:	115LM/W
LED chip:	LG
CRI:	>80

Electrical:


Rated Power:	32/40/48W
Input voltage:	120-347V
Power factor:	>0.9
Beam Angle:	120°

Life:

Lifespan:	50,000 hours
Warranty:	2 Years

**General:**

Dimmable Solution:	0-10V
Applications:	Offices /Hallways /Multipurpose Rooms



Dimensions	Length	Width	Depth
4FT	1210(47.6")	134.9(5.3")	54.4(2.1")



Clarro

INSTALLATION:

A-Surface Mounting:

Figure 1

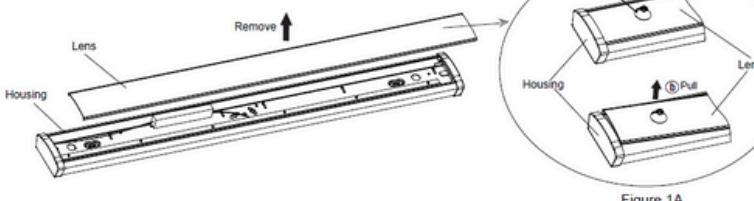


Figure 1A

Figure 2


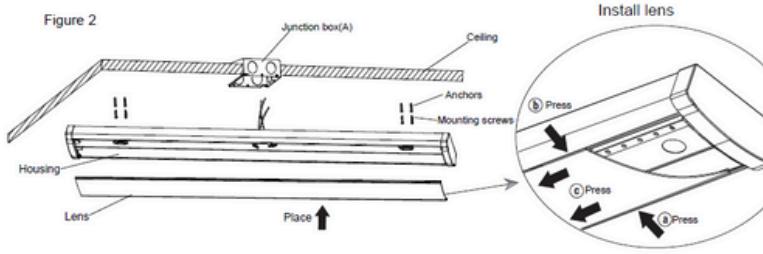


Figure 2A

B-Surface Mounting:

Surface Mounting(B)

Figure 3

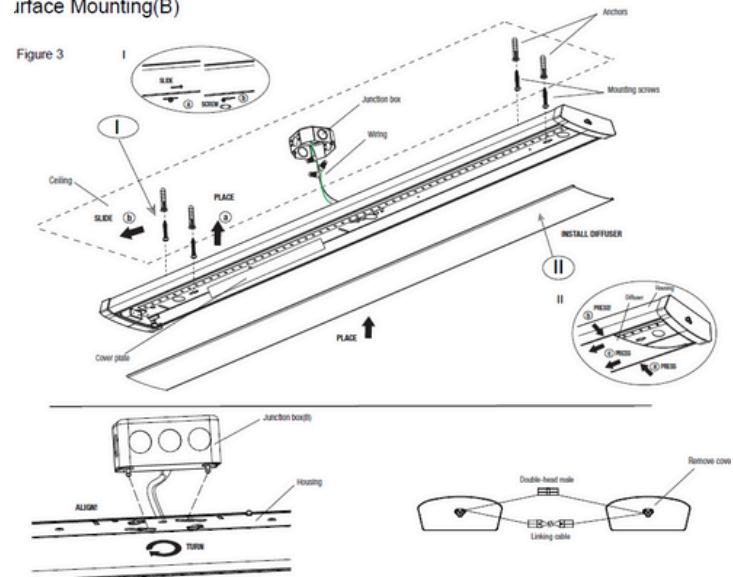

Suspension Mounting:

