
## 18W Waterproof LED Power Supply



DEL		PYWP18120000SMT	PYWP18240000SMT		
OUTPUT	DC VOLTAGE	12V	24V		
	RATED CURRENT	1.66Amp	0.83Amp		
	CURRENT RANGE	$0^{\sim}1.50$ A	$0^{\sim}0.75$ A		
	RATED POWER	18W	18W		
	RIPPLE&NOISE(max)	150mV	150mV		
	CURRENT TOLERANCE	$\pm$ 0.5V	$\pm 0.5 V$		
	SETUP RISE TIME	80ms/110,220VAC	81ms/110,220VAC		
	HOLD UP TIME(Typ.)	60ms/110-220VAC	60ms/110-220VAC		
INPUT	VOLTAGE RANGE	100 <sup>~</sup> 265VAC			
	FREQUENCY RANGE	$50^{\circ}60$ Hz			
	POWER FACTOR(Typ.)				
	EFFICIENCY(Typ.)	>82%	>82%		
	AC CURRENT (Typ.)	3. 5A/110, 220VAC	2. 0A/110, 220VAC		
	INRUSH CURRENT (Typ.)	COLD START 50A/110 <sup>~</sup> 220VAC			
PROTECTION	Short circuit	Protection type:recovers automatically after condition is removed			
	Overload	overload protected@145-160% above peak rating			
	Over temperature	Protection type:Shut down o/p voltage,re-power on to removed			
ENVIRONMENT	WORKING TEMP.	$-30^{\sim}+50^{\circ}\mathrm{C}$ (Refer to output load derating curve)			
	WORKING HUMIDITY	20 <sup>~</sup> 99% RH non-condensing(Waterproof)			
	STORAGE TEMP., HUMIDITY	-40 <sup>~</sup> +80°C, 10 <sup>~</sup> 99%RH			
SAFETY&EMC	SAFETY STANDARDS	ETL/ROHS/CE Mark(EMC,LVD),IP67			
	WITHSTAND VOLTAGE	I/P-0/P:1.5KVAC IP-GND:1.5KVAC			
	EMC Test Standards	EN55015:2006;EN61547:1995+2000;EN61000-3-2:2006			
		EN61000-3-3:1995+A2:	-3-3:1995+A2:2005;EN61346-1:2001;EN61347-2-13:2006		
NOTE	1. All parameters NOT specially mentoned are measured at 110V, 220VAC input, rated load and 25°C of ambient temperatu				
	2. Ripple&noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf&10uf par				
	capacitor.				
	3. Tolerance: includes set up tolerance, line regulation and load regulation.				

Due to continuous improvements, the information herein may be changed without notice 831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1(604) 770-3315 | Einfo@maxtarlighting.com

## 18W Waterproof LED Power Supply

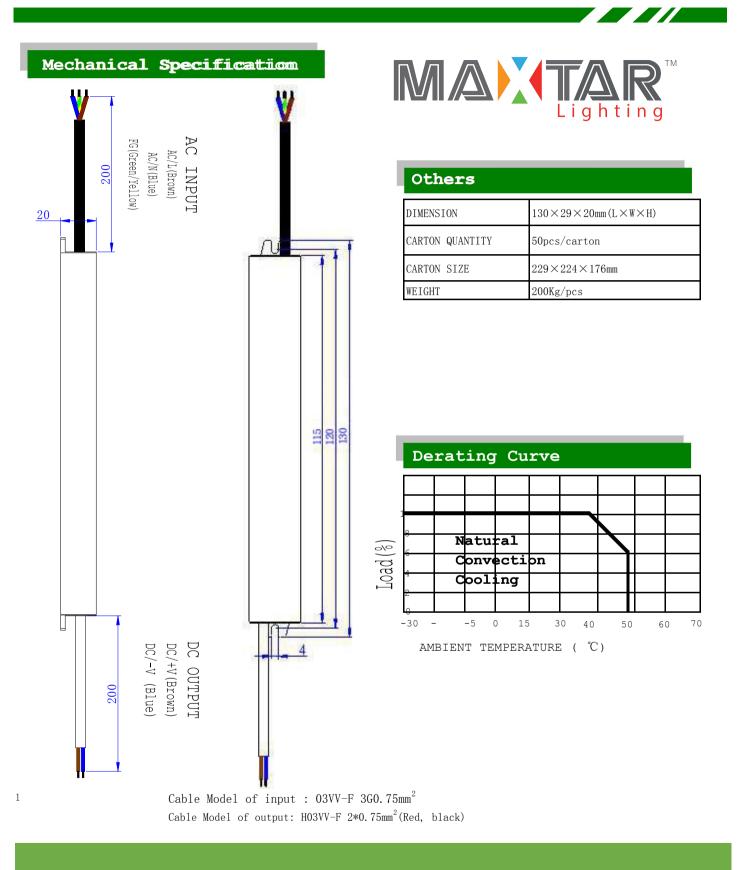

Due to continuous improvements, the information herein may be changed without notice 831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1(604) 770-3315 | Einfo@maxtarlighting.com