



### LumaFlex Gimbal 90



#### Description:

This low profile Gimbal Down light is a 9 watt 4" lighting fixture for recess retrofit application. It is a high-performance, easy to install residential grade down light solution that offers good light output, energy efficiency and stream lined design, Suitable for damp locations. ETL Approved, IC Rated and Air Tight 3 CCT tunable by DIP Switch and Wall Switch control.



**Model:** DNLG09C4205CWHLP

#### Optical:

CCT:	5CCT Tunable
Lumen out put:	750LM
Lumen Efficacy:	80LM/W
LED Type:	COB
CRI:	≥80

#### Electrical:


Rated Power:	9W
Input voltage:	120V / AC / 60Hz
Beam angle:	60°

#### Life:

Lifespan:	50,000 Hours
Warranty:	2 years

#### General:

Dimmable Solution:	5%-100% dimming capability
IP:	IP44
Operating temperature:	-20°C~+40°C(-4°F~10°F)
Finish color Availability:	White
Certification:	ETL, Energy Star

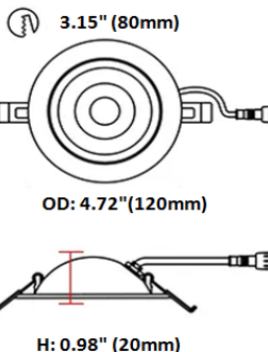



### LumaFlex Gimbal 90



## INSTALLATION

