



LED GIMBAL DOWNLIGHT 4"



Description:

This Gimbal Downlight is a 9 watt 4" lighting fixture for recess retrofit application. It is a high-performance, easy to install residential grade downlight solution that offers good light output, en-ergy efficiency and stream lined design, Suitable for wet and damp locations.

Model: DNLG0900045CWHLP

Optical: CCT:	5CCT Tunable		
Lumen out put:	720LM		
Lumen Efficacy: LED Type: CRI:	80LM/W COB ≥80		
		Electrical:	
		Rated Power:	9W
Input voltage:	100-130V 60HZ		
Beam angle:	36°		
Life: Lumen maintenance: Warranty:	50,000 Hours 2 years		
General:			
Dimmable Solution:	5%-100% dimming capability		
IP:	IP44		
Operating temperature:	-40°C~40°C(-4°F~105°F)		
Finish color Availability:	White, Black		
Certification:	ETL, Energy Star		
Туре:	IC		
	-		







Due to continuous improvements, the information herein may be changed without notice 831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1(604) 770-3315 | E: info@maxtarlighting.com




LED GIMBAL DOWNLIGHT 4"






DRAWING

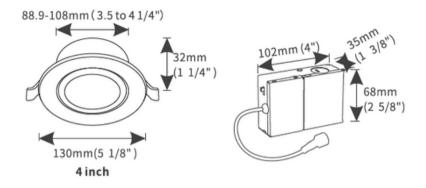


INSTALLATION

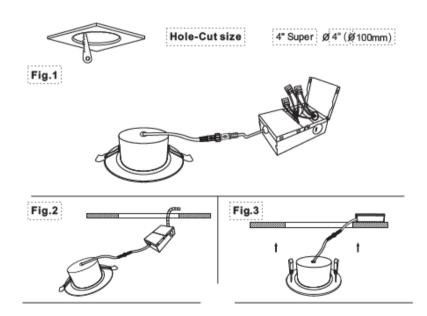




LED GIMBAL DOWNLIGHT 4"

PHOTOMETRY:




Luminous Intensity Distribution Diagram - At 3000K:



Note: The Curves Indicate the illuminated Area and the Average illumination When the Luminaire is a Different Distance At 3000K

LED DRIVER:

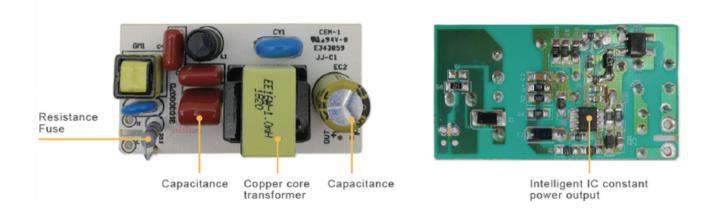

SPECIFICATION SHEET

