



PureCut

**Description:**

The PureCut Wall Pack delivers exceptional performance in a sleek full cut-off design, available in two sizes to cover a wide power range from 15W to 120W across four watt-selectable categories. Featuring CCT selectable settings, it allows on-site customization for any application. Each unit comes equipped with a photocell on/off switch and offers an optional motion sensor for enhanced energy savings and control. Ideal for commercial and industrial exteriors, PureCut provides reliable, dark-sky-friendly illumination with style and efficiency

**Model: WLPC****Optical:**

CCT:	3CCT(3000/4000/5000K)
LED Type:	2835
Lens	Polycarbonate
CRI:	>80

**Electrical:**

Rated Power:	80/120W
Input voltage:	120-277VAC & AC120-347V for options
Power factor:	≥0.90
Driver Efficacy	90%

Life:

Lifespan:	L70 @ 50,000Hrs
Warranty:	3 Years

**General:**

Dimmable Solution:	1-10V Dimmable
IP:	IP65
Operating temperature:	-40°F to 122°F (-40°C to +50°C) for standard
Housing:	Die-cast aluminum
Finish color Availability:	Bronze, Custom finishes available
Certification:	cULus ,DLC
Application:	Factory, Warehouse, Walkways, Outdoor Commercial, Outdoor Residential.

Due to continuous improvements, the information herein may be changed without notice

831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1(604) 770-3315 | E: info@maxtarlighting.com



PureCut



Key Features

Die-cast aluminum housing
Durable housing provides good heat dissipation.

Optical polycarbonate lens
DLC Standard Full cut-off wall pack.



Field-adjustable CCT

3CCT Selectable: 3000K/4000K/5000K.

Photocell ON/OFF

Field-adjustable wattage

4 Wattage selectable.



Microwave motion sensor





Wall pack with glare shield



Product Dimension



9"



11"



Performance Summary

Model NO	Size	Watts	3 CCT	LPW	Lumens(±10%)	Voltage	Dim	CRI	Beam Angle
WLPC-0940	9"	40/30/20/15W Selectable	3CCT Selectable 3000K 4000K 5000K	150lm/W	6000LM @40W	AC120-277V AC120-347V	0-10V	>80	Type III
WLPC-0980	9"	80/60/50/40W Selectable			12000LM @80W				
WLPC-1180	11"	80/60/50/40W Selectable			12000LM @80W				
WLPC-11120	11"	120/100/90/60W Selectable			18000LM @120W				

Accessories (Sold separately)

Picture	Item #	Description
	GLS09	WLPC Glare Shield for 9" fixture
	GLS11	WLPC Glare Shield for 11" fixture
	SMMS	Sharkward Zhaga Microwave Motion Sensor
	SBMMS	Sharkward Zhaga Bluetooth Microwave Motion Sensor
	SPMMS	Haisen Plug-in Microwave Motion Sensor
	BT04	4W Streamer Emergency driver for 9" fixture
	BT09	9W Streamer Emergency driver for 11" fixture




PureCut



Ordering Information

Model	Voltage(VAC)	Option	Accessories
WLPC-0940	UNV: 120-277 347: 120-347	S: Sensore P: Photocell	GLS09: Glare Shield 9"
WLPC-1180			GLS11: Glare Shield 11"
WLPC-1140			SMMS: Sharkward Zhang Microwave Motion Sensor
WLPC-11120			SBMM: Sharkward Zhang Bluetooth Microwave Motion Sensor SPMM: Haisen Plug-in Microwave Motion Sensor BT04: 4W Streamer Emergency driver for 9" fixture BT09: 9W Streamer Emergency driver for 11" fixture

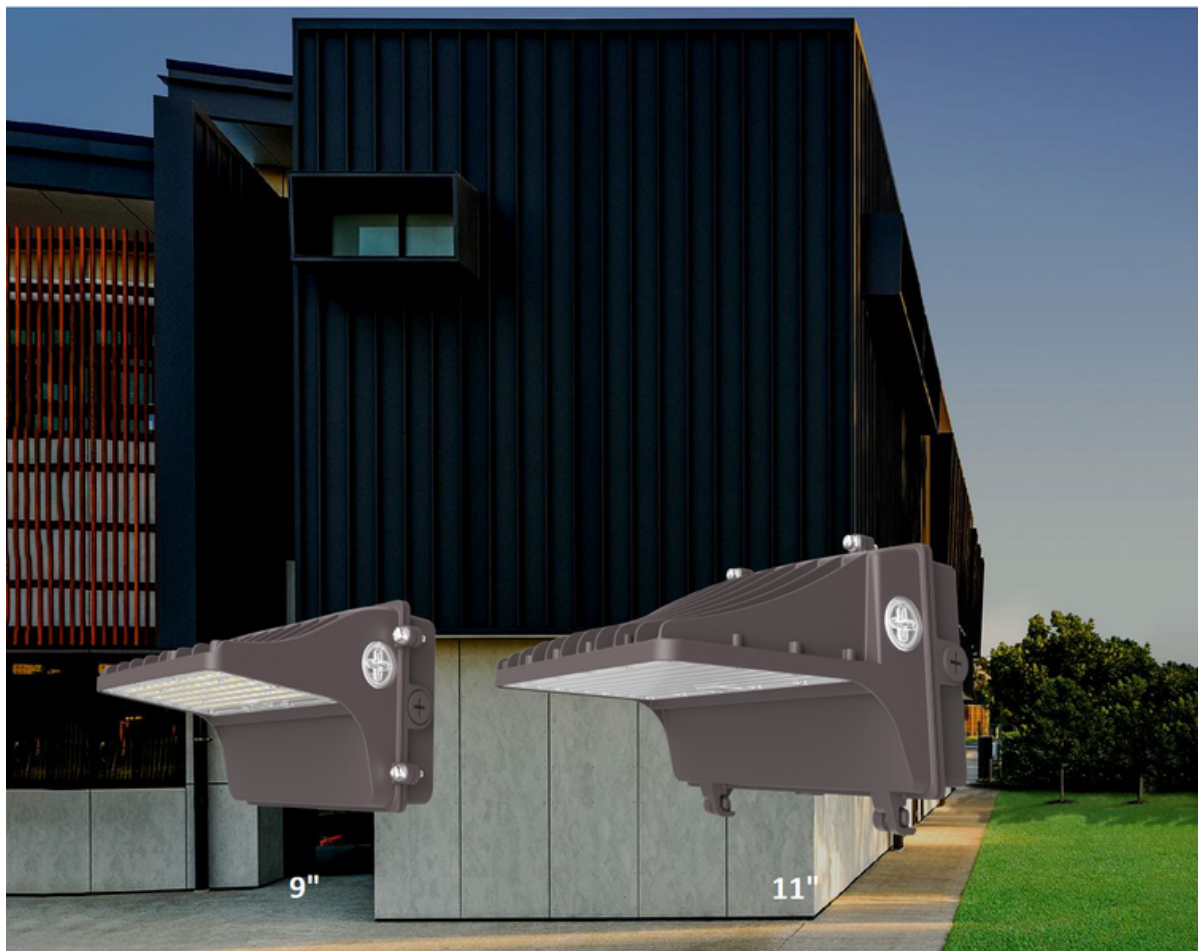






PureCut



Photometry

9" 15W 3000K

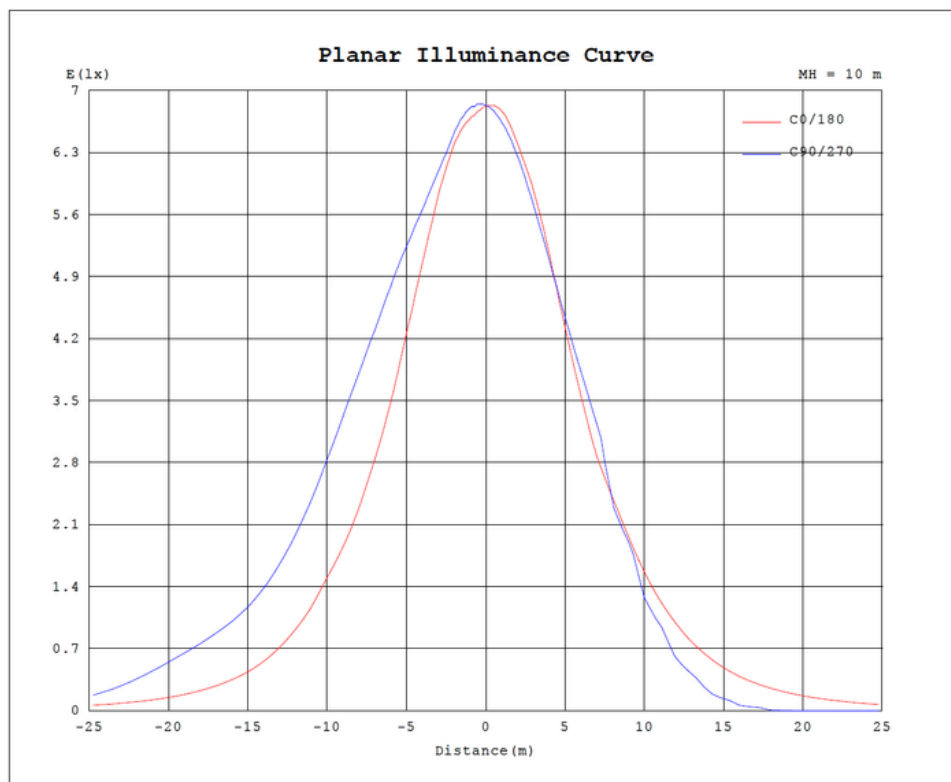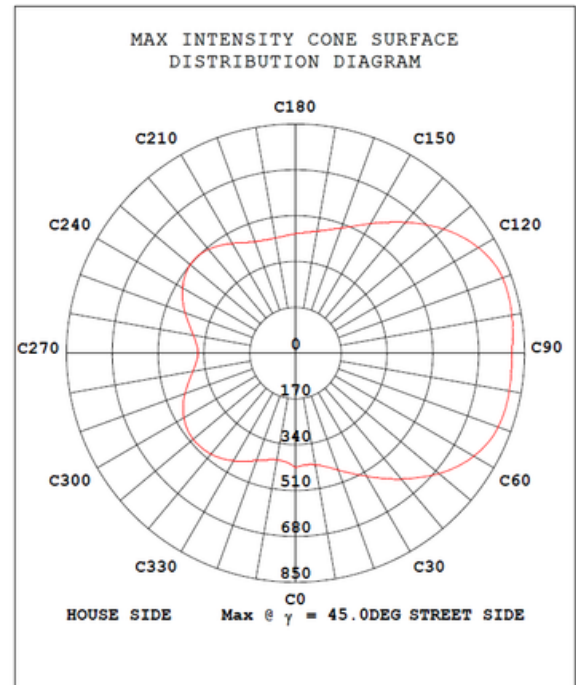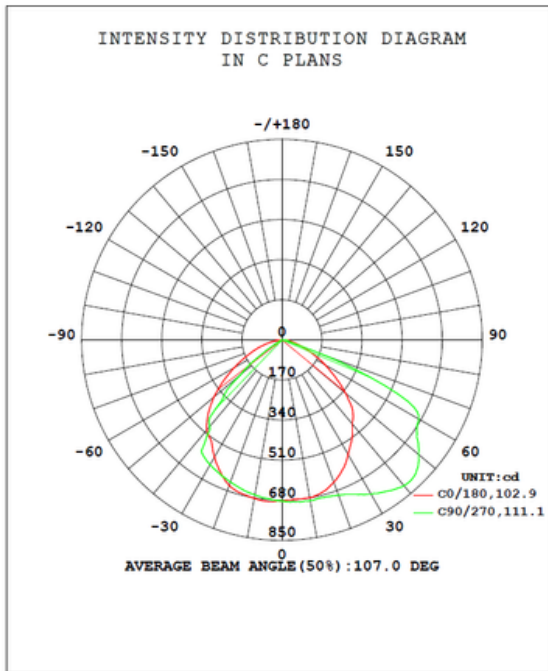






PureCut



Photometry

9" 80W 3000K

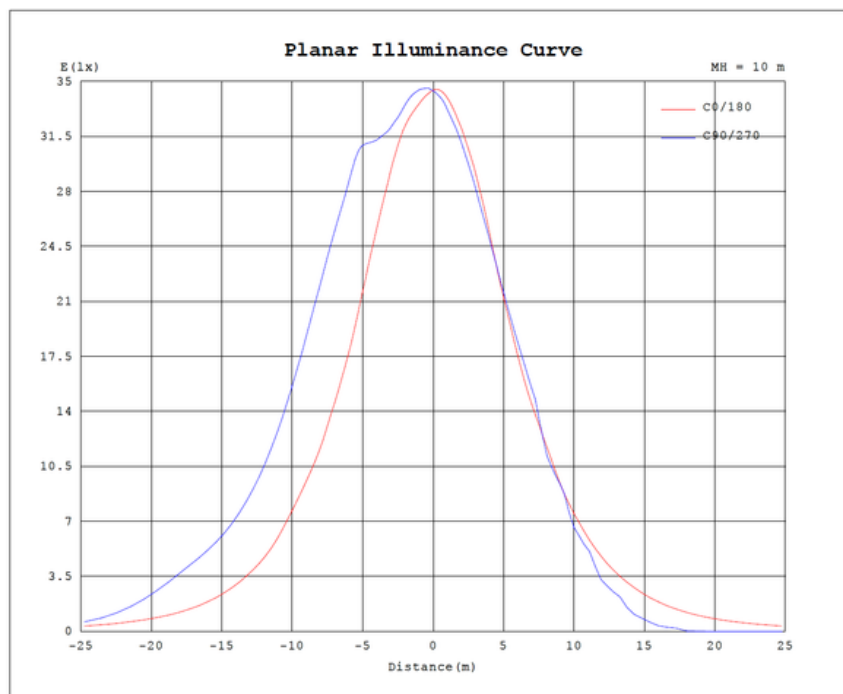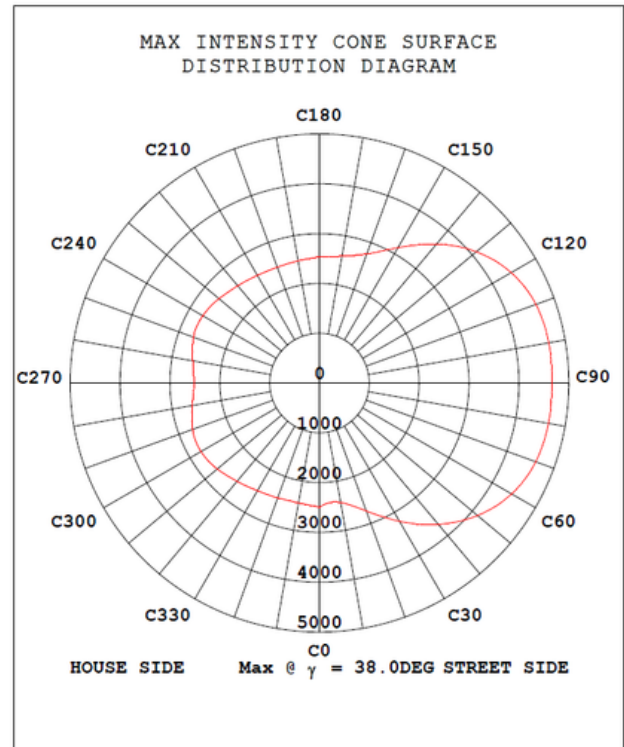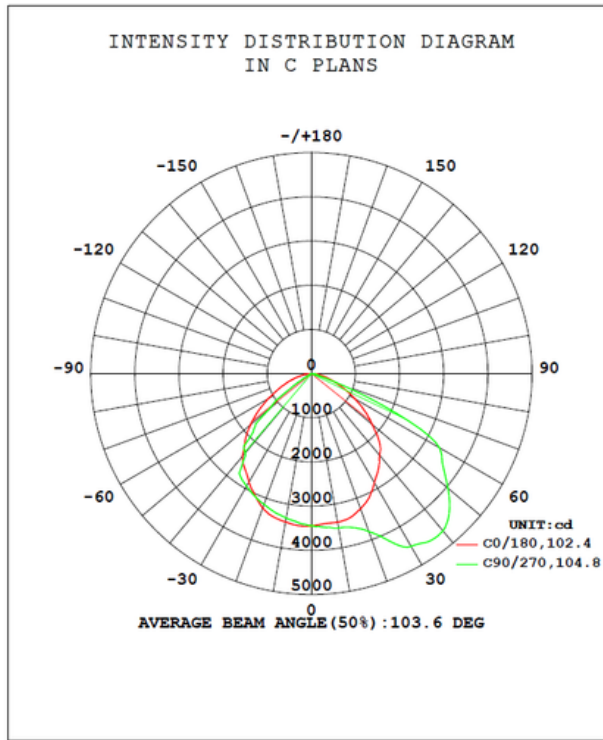






PureCut



Photometry

11" 40W 3000K

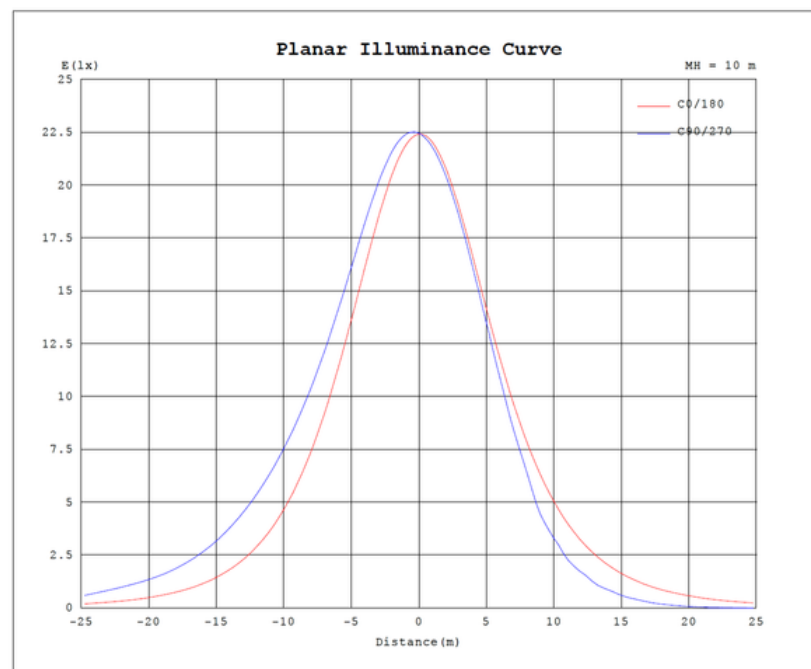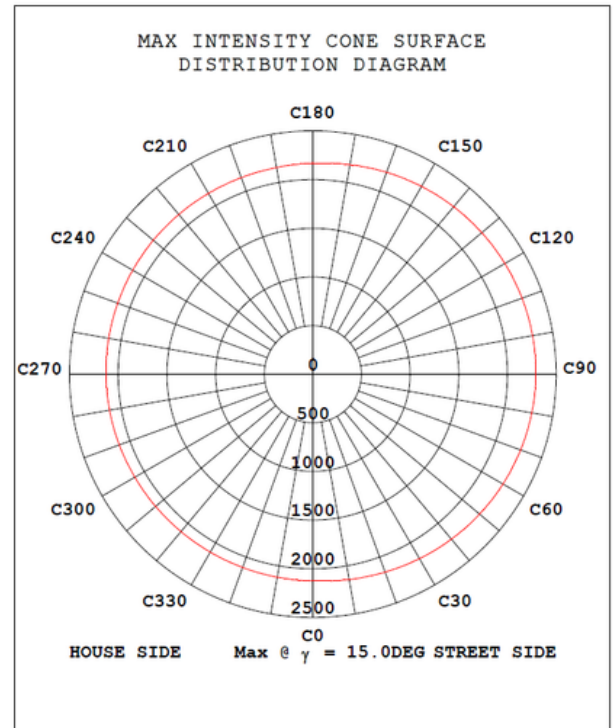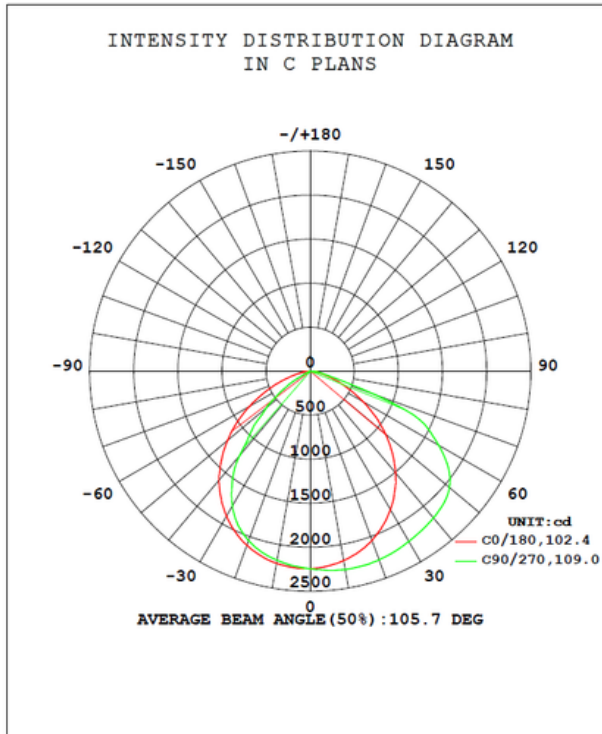



PureCut



Photometry

11" 120W 3000K

