




VersaGlow

SPECIFICATION SHEET



Description:

The VersaGlow Linear Pendant 008 series offers four finish option: black, anodized grey, white, and custom. Black is a timeless option that blends into any space, while anodized grey adds sophistication and elegance. White is clean and simple, and works well with minimalist and contemporary designs. Custom finishes allow customers to choose their own color or look for their fixtures. With these options, customers can select the perfect finish to complement their space and style.



Model: LRL08B4011043CXXSN

Optical:


CCT:	3000 / 4000 / 6000
Lumens	108LM/W
Driver Efficacy:	>90%
CRI:	83/90 optional

Electrical:

Max Run:	400W
Rated Power:	30W @4FT 40W@4-5FT
Input voltage:	100-277V
Power factor:	>0.95
THD:	<20%
Beam Angle:	112°

Life:

Lifespan:	50,000 hours
Warranty:	2 Years

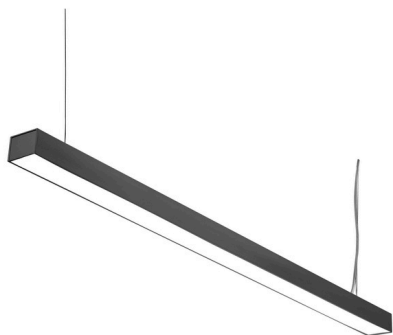

General:

Dimmable Solution:	Non-Dimmable/ 0- 10V /DALI
IP:	IP20
Applications:	Suspended/Ceiling Mounted
Distribution:	Direct 100%
Finish options:	Black / White / Anodized / Custom
Certification:	ETL/CETL
Option:	Direct & Indirect



VersaGlow

SPECIFICATION SHEET

ORDERING GUIDE





Sample: LRLP-03-30-UNV-WH-30-10V

Model	Length	Power	Lumens	Voltage	Finish	CCT	Dimming	Installation
LRLP	3FT 4FT 5FT	30W 40W 40W	3000lm 3928lm 3928lm	100-277 : UNV 120 : 120	WH White BK Black GR Grey	30K 3000K 40K 4000K 60K 6000K	0: Non Dimmable 10V: 0 -10V D: DALI P: TRIAC (phase dimming)	P: pendant S: Surface

DIMENSIONS

2.56W x 1.85H

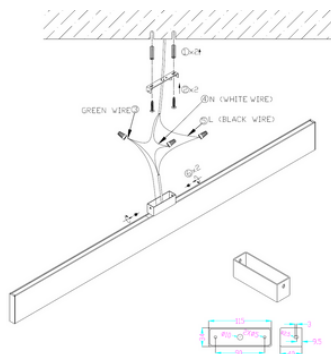




Accessories






90 degree coupler

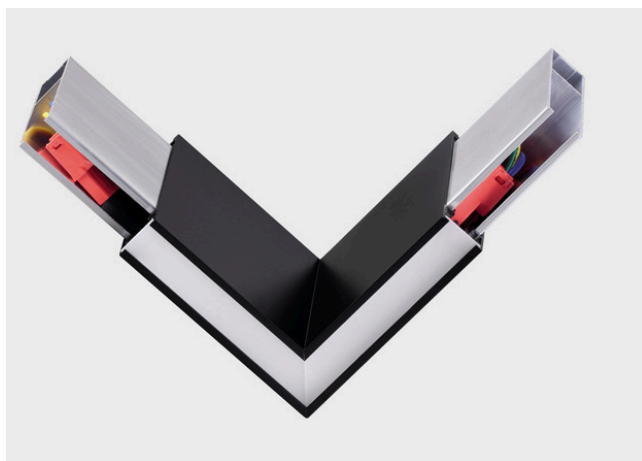



VersaGlow

SPECIFICATION SHEET

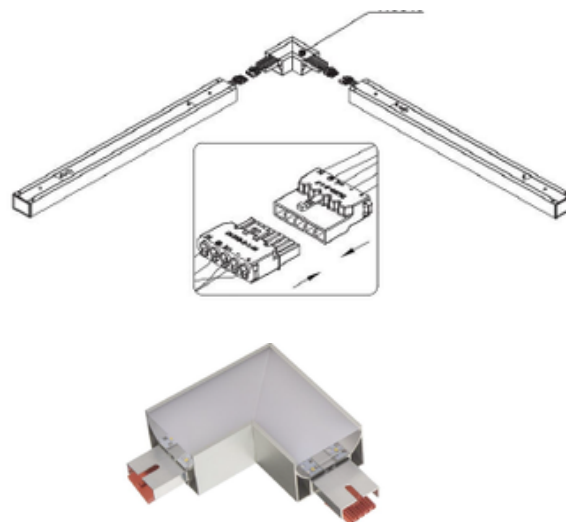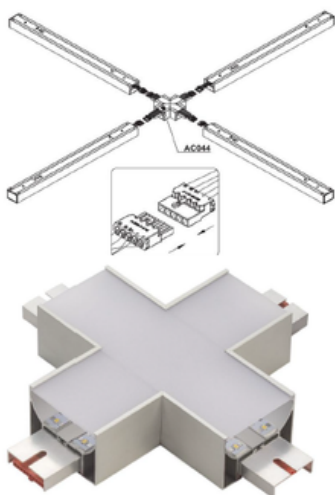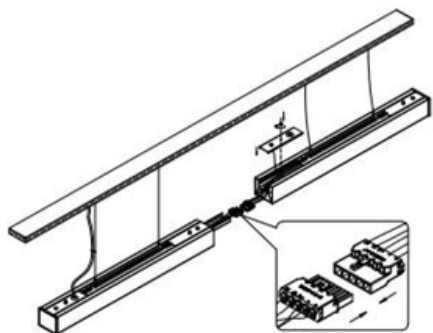



VersaGlow

SPECIFICATION SHEET

