




### Lumeo Deep R4



#### Description:

Durable airtight aluminum body with etched white PMMA diffuser lens for low glare. 1%-100% dimming capability. This general application light fixture features a 9/12 watt LED module that maintains Uniform intensity producing up to 747 lumen with a typical CRI of 80/90. The fixture lens provides 100° beam spread Includes two spring loaded clips to attached to any ceiling material



#### Model: DNLRR1211045CLB

##### Optical:

CCT:	2700 / 3000 / 3500 / 4000 / 5000 5CCT
Lumen out put:	765LM @ 9W 1020LM @12W
Lumen Efficacy:	85LM/W
LED Type:	SMD2835
CRI:	80Ra/90Ra

##### Electrical:


Rated Power:	9W / 12W
Input voltage:	AC120V / 60Hz
Beam angle:	100°
Power factor/THD/PE:	>90% /<30 /70%

##### Life:

Lifespan:	50,000 Hrs.
Warranty:	2 Years

##### General:


Dimmable Solution:	Triac
IP:	IP44
Operating temperature:	-20C~+40C
Storage temperature:	-40C~+85C
Finish color Availability:	White
Certification:	cETLus

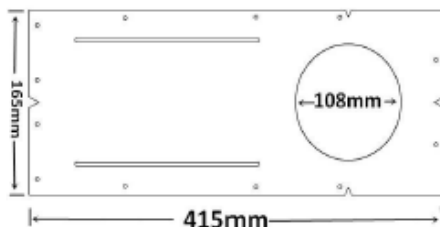




### Lumeo Deep R4"

#### POLAR CURVES WIDE DISTRIBUTION

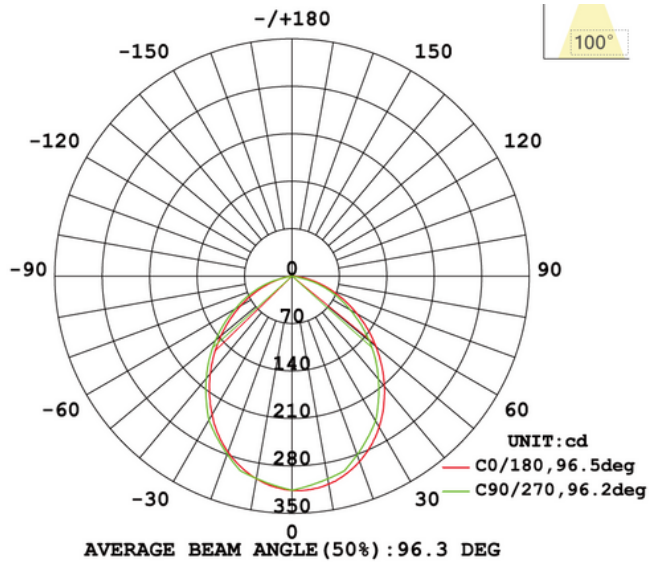

#### AVERAGE AND CENTER E FIGURE

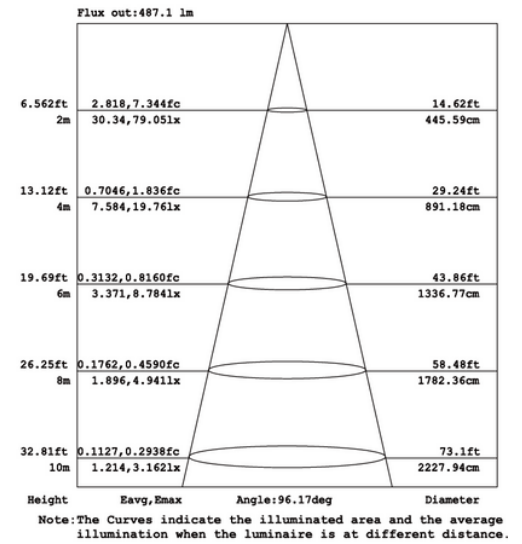

#### INSTALLATION PROCESS:

Fig.1




Fig.2




Fig.3

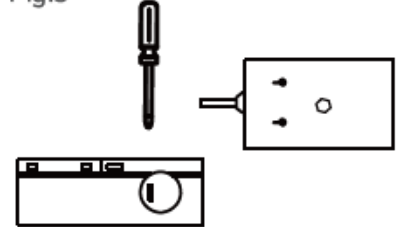


Fig.4

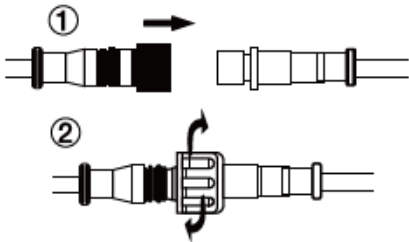


Fig.5




Fig.6

