















Flatix PRO 24

Description:

Introducing the Square Slim Flat Panel Light, a versatile lighting solution for commercial spaces. Available in 2X4 size it seamlessly integrates with T-bar ceiling tiles and offers a surface mount kit for various ceiling structures. With watts tunable and CCT changeable features, it caters to different applications, providing customizable lighting. Easy installation adds to its appeal, making it an efficient choice for modern commercial environments. Elevate your space with the Square Slim Flat Panel Light – a stylish, adaptable, and energy-efficient lighting solution.



Model: PLLS402724SCGI

Optical:

Lumen efficiency : 130LM/W CRI: ≥80



Electrical:

Rated Power: 30W/40W/50W/60W/72W

CCT Tunable Series: 3000K / 3500K / 4000K / 5000K / 6500K

Input voltage: AC120-277V / 120-347VAC

Power factor: >0.95

Life:

Lifespan: 50,000 hrs Warranty: 2 Years



General:

Dimmable: 0-10V

Operating temperature: -22°F to 104°F(-30°C to 40°C)

Housing: White high-strength metal frame ,seamlessly Mounting: Recessed Installs into conventional grid ceilings Application: Offices / Educational & Retail / Commercial &

Institutional

Specifications

Model No.	Size	Input Voltage	POWER (TUNABLE)	CCT (TUNABLE)	CRI	LUMINOUS EFFICIENCY	DIMMABLE
Flatix PRO 24	2x4FT	AC120-277V 120-347VAC	30W/40W/50W/60W/72W	30K/35K/40K/50K/65K	Ra>80	130LM/W	0-10V



















Flatix PRO 24

PRODUCT DIMENSIONS

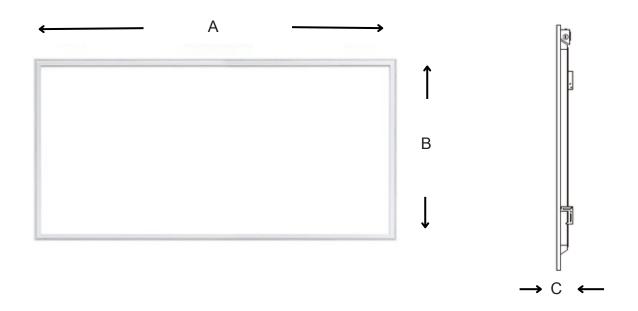

Model	size	A(inch)(mm)	B(inch)(mm)	C(inch)(mm)	
Flatix PRO 24	2x4 FT	23.74"(603mm)	47.75"(1213mm)	1.38"(35mm)	

POWER&CCT TUNABLE

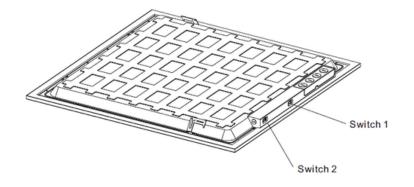

POWER TUNABLE(SWITCH1)

2x4FT 30W 40W 50W 60W 72W

CCT TUNABLE(SWITCH2) 2x4FT

2X4F I

3000K 3500K 4000K 5000K 6500K



















Flatix PRO 24

Photometric

