



BetonLux Surface

Description:

BetonLux Surface is designed for concrete structures such as retaining walls and steps in both commercial and residential settings. Available in three sizes, two shapes and multiple finishes, it integrates seamlessly into architectural designs. Unlike the standard BetonLux, the Surface model is surface-mounted, eliminating the need for a rough-in box while maintaining the same durability, modern look, and reliable performance.



Model: SPLE2003 / SPLE2004 /SPLE2005

Optical:

CCT :	3000K (2700K / 4000K Optional)
CRI:	>80
Beam Angle:	Asymmetric

Electrical:

Power :	12W / 15W
Lumen out put:	Refer to Specification table
Input voltage:	120~277V/AC

Life:

Lifespan:	50,000 Hrs.
Warranty:	5 Years

General:

Dimming:	ON/OFF / 0-10V
IP:	IP65
Baffle Faceplate:	Die-cast aluminum
Housing:	Die-cast aluminum
Gasket:	Silicone rubber
LED Optic:	Tempered Glass
Surface Finish:	AkzoNobel powder coating
Certification:	cETLus
Operating Temperature:	-40°C~45°C
Applications:	Surface mounted step light with smooth baffle, elegant and discreet, ideally suited for illuminating pathways and architectural surface perimeters.







BetonLux Surface

Dimension



SPLE2003

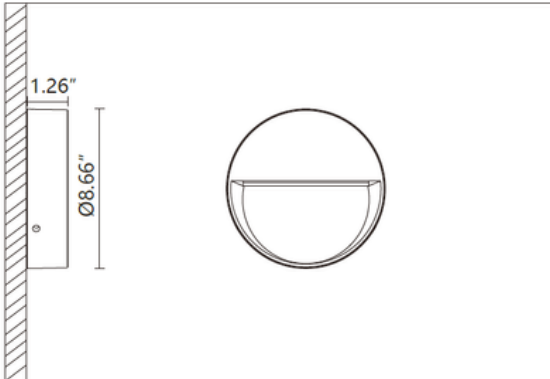



Photometric Data

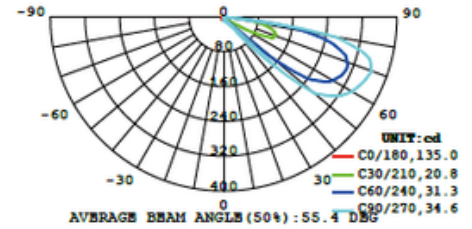

SPLE2004

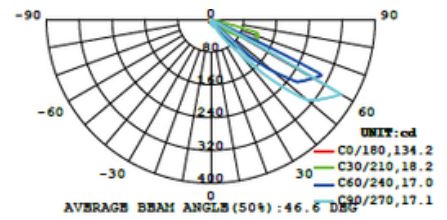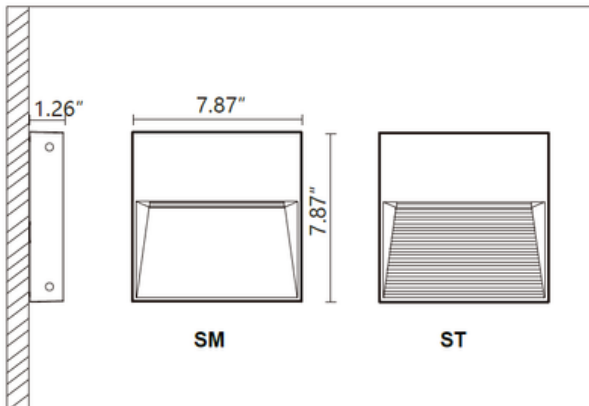

SPLE2005

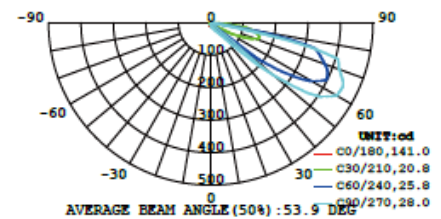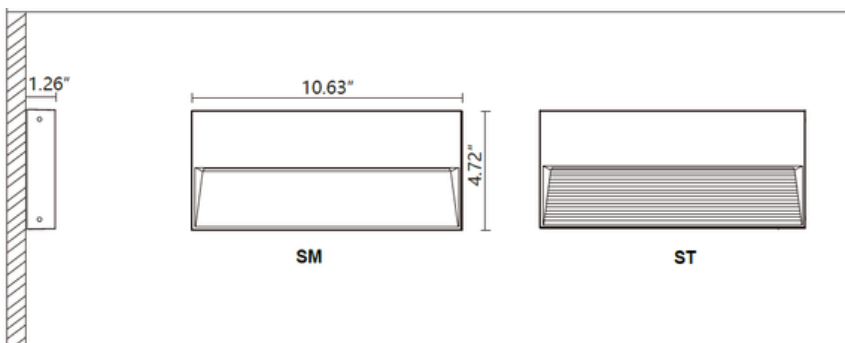



BetonLux Surface

Specification:

Model	Power Selectable (watt)	Lumen @3K	CCT	Size
SPLE2003	12W	330lm	27K/3K/4K	Ø8.66"x1.26"
SPLE2004	12W	330lm	27K/3K/4K	7.78"x7.78"x1.26"
SPLE2005	15W	420lm	27K/3K/4K	10.63"x4.72"x1.26"

Example: SPLE2305 - WS - 3 - G - DMG

Model	Power (Watt) Selectable	CCT	Finish	Baffle	Accessory
SPLE2003 SPLE2004 SPLE2005	12W 12W 15W	2700K 3000K 4000K	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	SM: Smooth ST: Embossed	DMG: 0-10V Dimming M: Marine ambient corrosion resistance

