



CanopyBay



Description:

This versatile canopy light offers exceptional performance and convenience with 3CCT selectable technology, allowing you to choose the perfect color temperature for your space. Designed for enhanced energy efficiency and automation, it is compatible with photocells and motion sensors, providing smart control and reduced energy consumption. Available in a wide voltage range of 120-347VAC, it delivers reliable lighting for various commercial and industrial applications. Ideal for covered parking areas, gas stations, and garages, this canopy light ensures bright, uniform illumination while enhancing safety and visibility



Model: CNP75273CSBRRZ

Optical:

| | |
|-----------------------|-----------------------------|
| CCT: | 3CCT Selectable 30K/40K/50K |
| Lumen Efficacy@5000K: | 130lm/W |
| Lumen flux(±10%): | 9750lm @75W |
| LED Type: | SMD2835 |
| THD: | <20% |
| CRI: | CRI>80 |

Electrical:


| | |
|----------------|-------------------------------|
| Rated Power: | 75/65/55/40/20W Selectable |
| Input voltage: | 120-277V/120-347V, 50 / 60 Hz |
| Beam angle: | 110° |
| Power factor: | ≥0.90 |

Life:

| | |
|-----------|-----------|
| Lifespan: | 50,000hrs |
| Warranty: | 3 Years |

General:

| | |
|------------------------|--|
| Dimmable Solution: | 0-10V |
| IP: | IP65 |
| Operating temperature: | -40°F to 113°F (-40°C to +45°C) |
| Dimension: | 254.3mm(10.01")x254.3mm(10.01")x81.5mm(3.21") |
| Mounting: | Surface Mounting, Pendant Mounting |
| Finish: | Bronze(Standard), Custom finishes available |
| Applications: | Covered Parking area/Garages/Walkways/ Gas station |

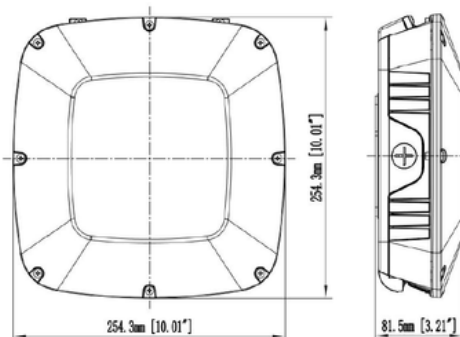



Canopy Bay



Key Features

- DLC category meet both Canopy & Garage.
- 3CCT(3000/4000/5000K) and 5Wattages Selectable offer SKU reduction.
- 4-in-1 Color Temperature, Power, integrated Photocell ON/OFF, and integrated Occupancy sensor ON/OFF switch.
- Quick installation with flip-open cover.
- 3-in-1 Color Temperature, Power, and integrated Photocell ON/OFF switch.
- 120-277 VAC & 120-347 VAC for options.

**Die-cast aluminum housing
provides great heat dissipation**




Flip-Open cover design

Makes mounting to a recessed junction box or conduit entry point both quick and trouble-free.


3-in-1 Switch Button

CCT Selectable
Wattage Selectable
Photocell ON/OFF



4-in-1 Switch Button

CCT Selectable
Wattage Selectable
Photocell ON/OFF
Motion sensor ON/OFF




CNPS75: Polycarbonate lens achieve 110° beam angle meet Canopy DLC category.



Canopy Bay




Integrated Occupancy Sensor Settings

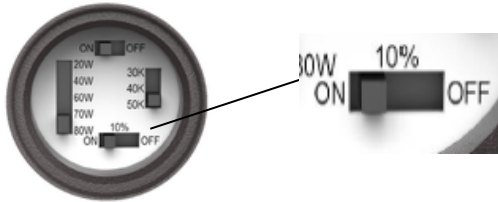

Sensor Datasheet

| | |
|---------------------|--------------------------|
| Install height | Max 4 meters (13ft) |
| Detection distance | 3-5 meters (10-16ft) |
| Hold time | 10 minutes |
| Stand by brightness | 10% (under 10% Dim Mode) |

10% Dim

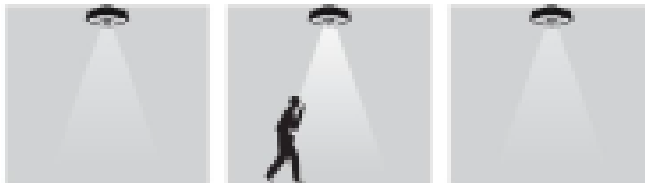

10% Dim Mode

The lights turn on when activity/motion is detected. After 10 minutes and no motion has been sensed, the light brightness 10% lux standby .The minimum wattage is 5W.


Switch ON



Switch ON Mode

This light turns on when active/motion is detected. After 10 minutes and no motion has been sensed, the light shuts off completely.

Switch OFF

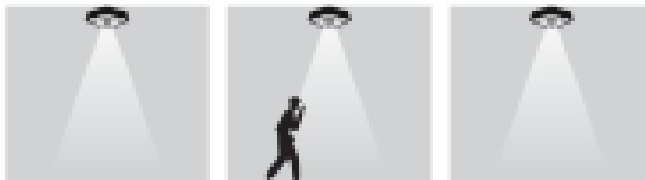

Switch OFF Mode

The motion sensor closed, no motion sensing function.