




LuminaCast Baffle

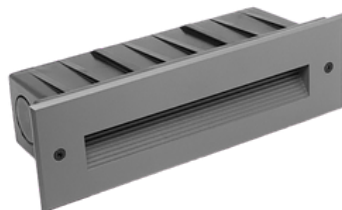

Description:

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.

Model: SP15170524003KDGKP

Optical:

| | |
|---------------|-----------|
| CCT: | 3000 |
| Light Source: | 15 X 0.2W |
| Luminance: | 104LM |
| CRI: | >80 |

Electrical:

| | |
|----------------|-------------------------------------------------|
| Rated Power: | 4.8W |
| Input voltage: | 24V DC |
| LED Driver: | Constant Voltage Input, Constant Current Output |

Life:

| | |
|-----------|------------|
| Lifespan: | 50,000 Hrs |
| Warranty: | 5 Years |

General:

| | |
|----------------------------|-----------------------------------------|
| Dimmable Support: | Triac PWM 1-10V Dali |
| IP: | 65 |
| IK: | 10 |
| Operating temperature: | -20°C~40°C |
| Finish color Availability: | Die-casting grey powder coated aluminum |
| Certification: | cETLus |

TRIAC

PWM

1-10V

DALI

IP65
OUTDOOR
RATED







OSRAM





LuminaCast Baffle

PRODUCT SIZE

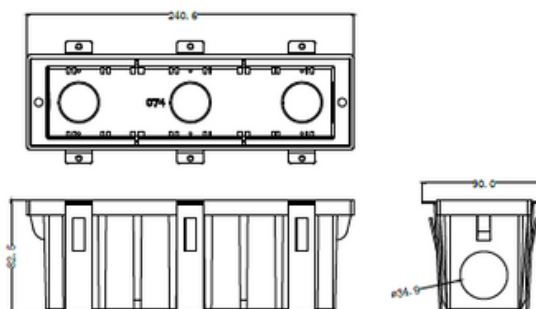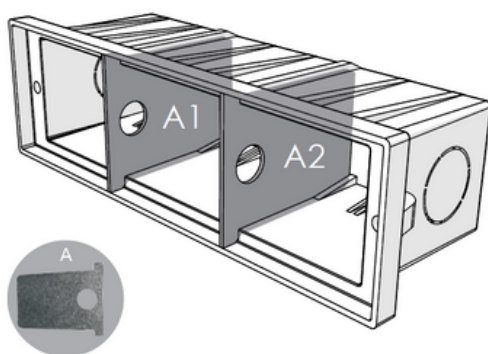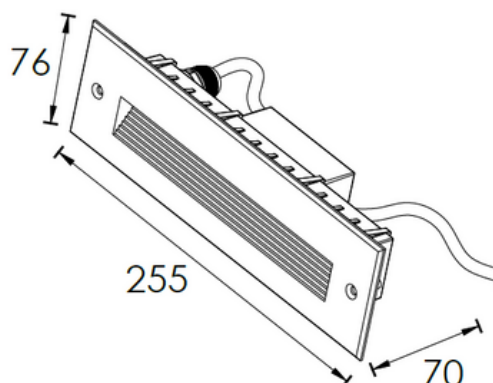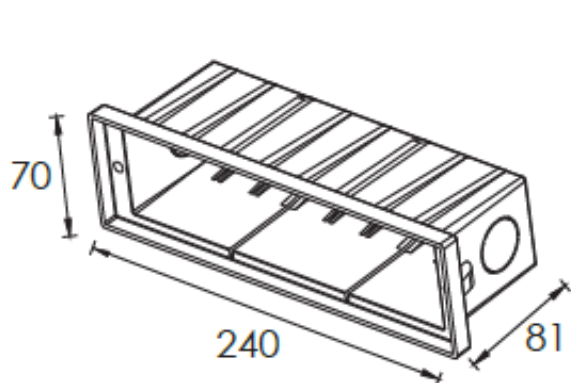



LuminaCast Baffle

Mounting sleeve characteristic



.The above picture-the support plate "A" and "B" are used for preventing deformation of the sleeve during the construction installation process.



Please remove the supporting plate "A" and "B" from the mounting sleeve before the lamp installation





LuminaCast Baffle

PHOTOMETRIC

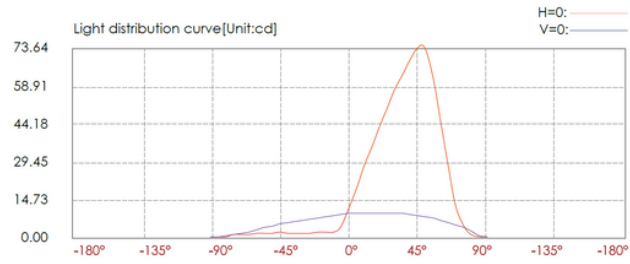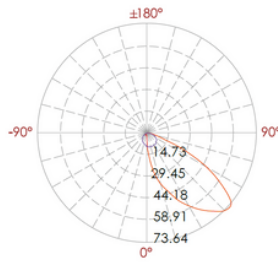

Lux distance cure

| Illuminance at a distance | | |
|---------------------------|--------------|--------------|
| Center beam LUX | Beam width V | Beam width H |
| 2m | 3.28 LUX | 4.30m 1.70m |
| 4m | 0.82 LUX | 8.60m 3.40m |
| 6m | 0.36 LUX | 12.9m 5.10m |
| 8m | 0.20 LUX | 17.2m 6.90m |
| 10m | 0.13 LUX | 21.4m 8.60m |
| 12m | 0.09 LUX | 25.7m 10.3m |

Ver.Spread:94.1 Horiz.Spread:46.5

