

TUBO-S
Surface Mounted Light



PREMIER



TUBO-S

TUBO-S

Surface Mounted Light




PREMIER

Versatile & Stylish Illumination with the **TUBO** Cylinder Light Fixture

Enhance any space with the **TUBO** Cylinder Light Fixture, designed for both pendant and surface-mounted installations to accommodate various design needs. Featuring a premium black or white powder-coated finish, this fixture combines elegance with durability.

Tailor your lighting with three beam angle options (18°, 24°, 36°) and a choice of black, white, or Gold reflectors to create the perfect ambiance. With multiple power options and sizes, **TUBO** adapts effortlessly to diverse applications.

Engineered for reliability, the 5-year warranty ensures exceptional quality and performance. The sleek, modern design sets **TUBO** apart, making it an ideal choice for residential, commercial, and hospitality settings



TUBO-S L



TUBO-S M




TUBO-S S

TUBO-S


Surface-mounted Luminaire

Modern aesthetic Ceiling & Pendant light
Engineering to combine maximum performance with a sleek style

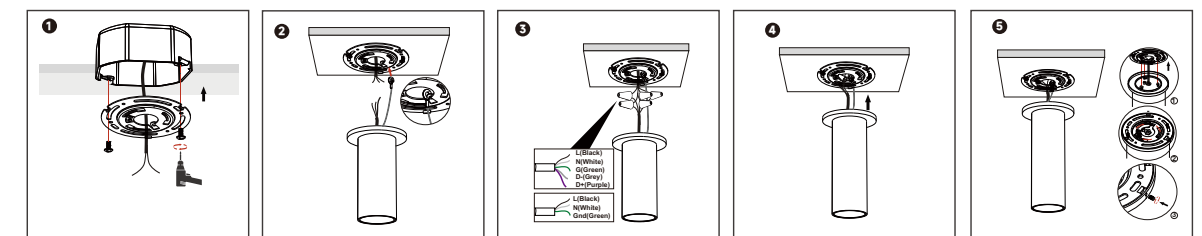

Very easy to change lens (twist and lock)


Spot, narrow and medium beam angles are available for different lighting applications

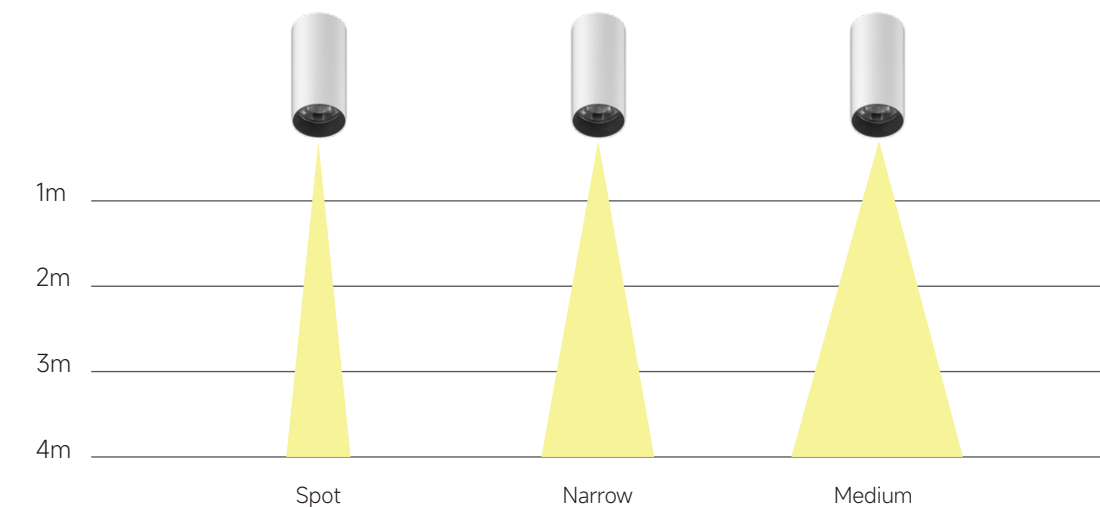

TUBO-S S

TUBO-S M

TUBO-S L





Surface Mounted
TUBO-S S / TUBO-S M / TUBO-S L




Features

- Cylindrical surface mounted light made of aluminum.
- Ultra-slim housing design with LED driver inside.
- Optimized passive cooling system
- Interchangeable decoration ring for various lighting application.
- Adopt of lens guarantees high luminous efficiency and uniform distribution.
- Easy to change lens (twist and lock) to choose spot, narrow and medium beam angle.


Specifications

- Dimming modes: Phase dim, 0-10V
- Sizes: Ø55mm,Ø72mm,Ø90mm
- Installation: Surface mounted


Type



Decoration ring




Light distribution



TUBO-S S/M
Surface



Drawing

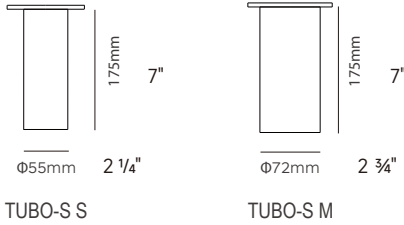

11W 720lm-800lm

	Code	Size	System LM	LED W	System W	CRI	CCT	Beam
TUBO-S	S-11W-930-18D	Ø55*170mm	720 lm	9W	11W	90	3000K	18°
TUBO-S	S-11W-940-18D	Ø55*170mm	800 lm	9W	11W		4000K	
TUBO-S	S-11W-930-24D	Ø55*170mm	720 lm	9W	11W	90	3000K	24°
TUBO-S	S-11W-940-24D	Ø55*170mm	800 lm	9W	11W		4000K	
TUBO-S	S-11W-930-36D	Ø55*170mm	720 lm	9W	11W	90	3000K	36°
TUBO-S	S-11W-940-36D	Ø55*170mm	800 lm	9W	11W		4000K	

15W 1200lm-1300lm

	Code	Size	System LM	LED W	System W	CRI	CCT	Beam
TUBO-S	M-15W-930-15D	Ø72*160mm	1200 lm	13W	15W	90	3000K	15°
TUBO-S	M-15W-940-15D	Ø72*160mm	1300 lm	13W	15W		4000K	
TUBO-S	M-15W-930-25D	Ø72*160mm	1200 lm	13W	15W	90	3000K	25°
TUBO-S	M-15W-940-25D	Ø72*160mm	1300 lm	13W	15W		4000K	
TUBO-S	M-15W-930-30D	Ø72*160mm	1200 lm	13W	15W	90	3000K	30°
TUBO-S	M-15W-940-30D	Ø72*160mm	1300 lm	13W	15W		4000K	

21W 1600lm-1700lm

	Code	Size	System LM	LED W	System W	CRI	CCT	Beam
TUBO-S	M-21W-930-15D	Ø72*160mm	1600 lm	18W	21W	90	3000K	15°
TUBO-S	M-21W-940-15D	Ø72*160mm	1700 lm	18W	21W		4000K	
TUBO-S	M-21W-930-25D	Ø72*160mm	1600 lm	18W	21W	90	3000K	25°
TUBO-S	M-21W-940-25D	Ø72*160mm	1700 lm	18W	21W		4000K	
TUBO-S	M-21W-930-30D	Ø72*160mm	1600 lm	18W	21W	90	3000K	30°
TUBO-S	M-21W-940-30D	Ø72*160mm	1700 lm	18W	21W		4000K	




TUBO-S L

Surface

 White  Black

Drawing



TUBO-S L

28W 2700lm-2900lm

Code	Size	System LM	LED W	System W	CRI	CCT	Beam
TUBO-S L-28W-930-18D	Φ90*230mm	2700 lm	25W	28W	90	3000K	18°
TUBO-S L-28W-940-18D	Φ90*230mm	2900 lm	25W	28W		4000K	
TUBO-S L-28W-930-30D	Φ90*230mm	2700 lm	25W	28W	90	3000K	30°
TUBO-S L-28W-940-30D	Φ90*230mm	2900 lm	25W	28W		4000K	
TUBO-S L-28W-930-45D	Φ90*230mm	2700 lm	25W	28W	90	3000K	45°
TUBO-S L-28W-940-45D	Φ90*230mm	2900 lm	25W	28W		4000K	



TUBO-S Pendant Light

Installation Instructions



Please read these instructions carefully before commencing installation and retain for future reference. If in doubt, we advise that you consult a qualified electrician to install the product. These products must not be modified. If any modification is made it may invalidate the warranty and may render the product unsafe. All electrical installations must be carried out according to national electrical code & local regulations.

Important safety Notes

1. Switch off the electricity at the mains before commencing installation or lamp change and (if a fuse box is used) remove the appropriate circuit fuse to avoid accidental switching on of the mains supply.
2. Connect to a 120-277V supply in accordance with relevant electrical standards.
3. Make sure all connections are tight with no loose strands.
4. Ensure fire regulations are not breached when fitting your lights.
5. If you are in any doubt regarding these instructions, consult a qualified electrician.

Warning:

1. For indoor use only
2. Please carefully choose a location for disposal of the flammable package.
3. Do not use defected cable.
4. We do recommend that a qualified electrician should be used to install the products.
5. Do not look at the lighted lamp directly.

