





### DiskAxis



Slim LED Pathway Light for Architectural Landscapes



#### PRODUCT

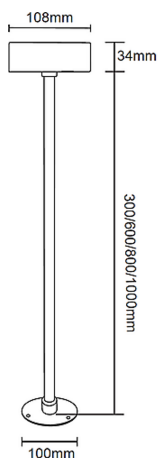

#### DIMENSIONS

#### DESCRIPTION

DiskAxis is a modern, slim LED pathway light with a minimalist stem and flat circular head. It provides consistent low-glare illumination for gardens, walkways and building perimeters. Its low-voltage configurations and corrosion-resistant outdoor construction support efficient, reliable landscape lighting.

#### KEY FEATURES

- 83.8-degree average beam angle for broad pathway illumination
- Available in 1700K amber, 2200K, 2700K, 3000K, 4000K or 6000K
- IP65 ingress protection and IK08 impact resistance
- Multiple mounting heights plus optional ground spike
- Standard and customizable powder-coated colour options
- CE-marked with LED, IP65 and IK08 performance marks

#### TECHNICAL SPECIFICATIONS

|                              |                                                |
|------------------------------|------------------------------------------------|
| <b>Model</b>                 | DiskAxis                                       |
| <b>Rated Power</b>           | 7W                                             |
| <b>Light Output</b>          | 533.2 lm                                       |
| <b>Efficacy</b>              | 75.6 lm/W                                      |
| <b>CCT Options</b>           | 1700K amber, 2200K, 2700K, 3000K, 4000K, 6000K |
| <b>Beam Angle</b>            | 83.8 degrees                                   |
| <b>CRI</b>                   | >80                                            |
| <b>Input Voltage</b>         | 200-240V AC or 12-24V AC/DC                    |
| <b>Light Source</b>          | SMD 3030 LED                                   |
| <b>Rated Life</b>            | 50,000 hours                                   |
| <b>Warranty</b>              | 3 years                                        |
| <b>Ingress / Impact</b>      | IP65 / IK08                                    |
| <b>Operating Temperature</b> | -20°C to +40°C                                 |

POWER

**7W**

OUTPUT

**533.2 lm**

VOLTAGE

**12-24V**

CCT

**1700K-6000K**

RATING

**IP65 / IK08**

LIFE

**50K hrs**

Due to continuous improvements, the information herein may be changed without notice


831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1 (604) 770-3315 | E: info@maxtarlighting.com




### DiskAxis



#### DIMENSIONS

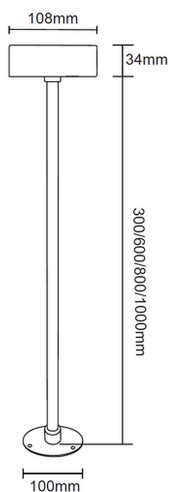

STANDARD




GROUND SPIKE

#### PRODUCT DETAILS


|                  |                                              |
|------------------|----------------------------------------------|
| Head Diameter    | 108 mm                                       |
| Head Height      | 34 mm                                        |
| Height Options   | 300 / 600 / 800 / 1000 mm                    |
| Base Diameter    | 100 mm                                       |
| Ground Spike     | 73 mm wide x 210 mm high                     |
| Body             | ADC12 die-cast aluminum                      |
| Diffuser         | Optical polycarbonate                        |
| Finish           | UV-stabilized polyester powder coating       |
| Standard Colours | Corten, matte black, matte grey, matte white |
| Custom Colours   | Brown, verde green, anthracite               |

#### PHOTOMETRIC PERFORMANCE AND APPLICATION


LUMINOUS INTENSITY DISTRIBUTION

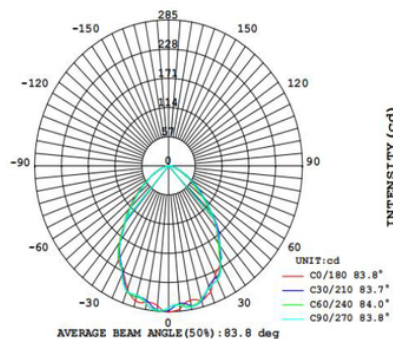

LUMINOUS INTENSITY DISTRIBUTION

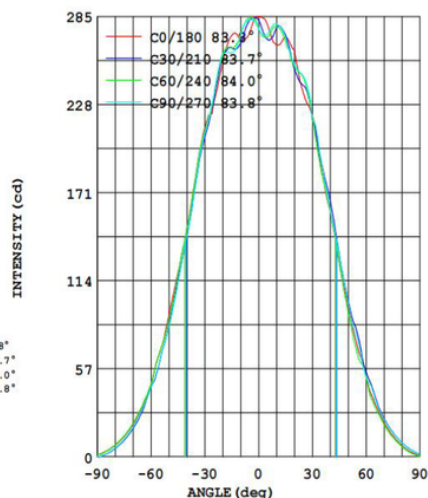

PHOTOMETRIC DATA - 83.8° AVERAGE BEAM

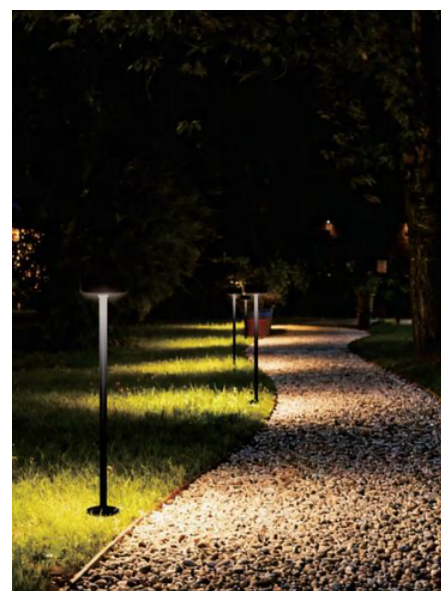

PROJECT APPLICATION