



DuoCore



Description:

Compact recessed LED fixture designed for both in-ground and in-wall installations. Features a durable stainless-steel trim with robust housing for walk-over applications, delivering precise accent lighting for pathways, facades, steps, and architectural details. Ideal for residential and commercial outdoor projects where a clean, minimalist look and reliable performance are required.

Model: DC-WUL312

Optical:

CCT: 2700K / 3000K / 4000K
Lumen out put: 200LM
Beam Angle: 10° / 15° / 21° / 36° / 60°

Electrical:

Rated Power: 2W
Input voltage: 12/ 24VDC

Life:

Lifespan: 50,000 Hrs
Warranty: 3 Years

General:

Dimmable: Dali/0-10V/Triac(24VDC only)
IP Rating: IP67
Finish: Satin 316 Stainless Steel
Applications: For outdoor inground / recessed / path / decking

Performance Summary

Unit: mm

Item number	Watts	Input	CCT	LED Lumens	Beam Angle	Cut out	Depth
DC-WUL312-F	2W	12/24VDC	2700K 3000K 4000K	200lm@4000K	10°	D40	65
DC-WUL312-H					15°		
DC-WUL312-L					21° 36° 60°		



DuoCore

RECESSED LIGHT






DC-WUL312-F




DC-WUL312-H




DC-WUL312-L



Dimension:

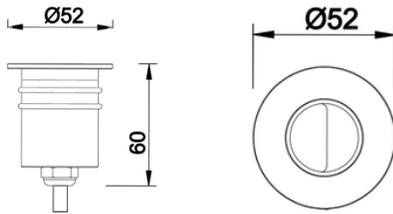

Mounting sleeve

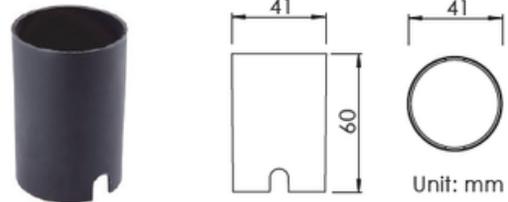

IP68 junction box



For single fixture installation



For continuous fixtures installation

Optional finish



Matt Black



Matt Silver

Optical Specification

