SPECIFICATION SHEET

HemiAxis



Description:

HemiAxis is a modern, slim pathway light designed for clean, architectural landscape lighting. Featuring a minimalist stem and a fully rounded dome head, it delivers a refined look that complements contemporary gardens, walkways, and building perimeters. Operating on a 12–24 VDC low-voltage system, HemiAxis provides safe, energy-efficient performance for outdoor applications. It is ideal for creating consistent pathway illumination while adding a stylish, upscale finish to any landscape design.


Model: HemiAxis

Optical:

CCT:	2700K / 3000K / 4000K/ Amber(1700)
Lumen out put:	210lm
Lumen efficiency:	70lm/W
Beam angle:	80°
CRI:	>80

Electrical:

Rated Power:	3W
Input voltage:	AC200-240V, 12-24 V AC/DC
Light Source:	SMD3030

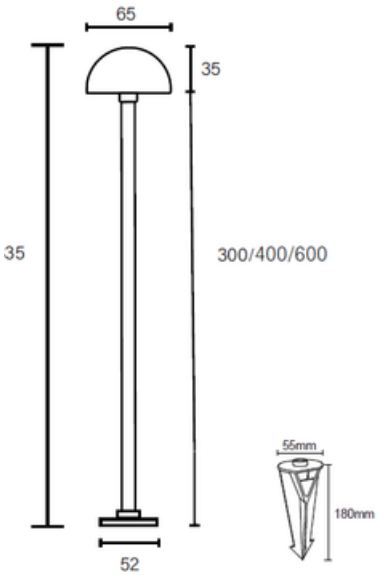

Life:

Lifespan:	50,000 Hrs
Warranty:	3 Years


General:

IP:	IP65
IK:	IK08
Operating temperature:	-20˚C~40˚C
Body:	6063 aluminum
Diffuser:	Optical Polycarbonate
Paint:	Anti-corrosive UV-stabilized polyester powder
Finishing:	Corten Grey Black White

SPECIFICATION SHEET

HemiAxis

Luminous Intensity Distribution Curve

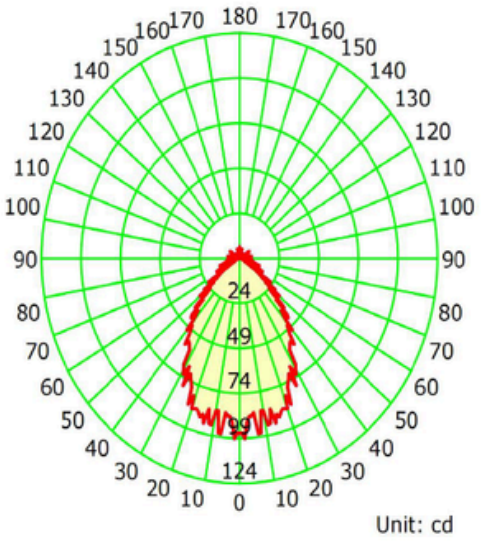

The Average Illuminance Effective Figure

