Description : Compact built in photocell and timer control plug in landscape transformer

UL 88W

INPUT VOLTAGE	**120VAC**
OUTPUT VOLTAGE	**12VAC**

ELECTRICAL & MECHANICAL SPECIFICATION



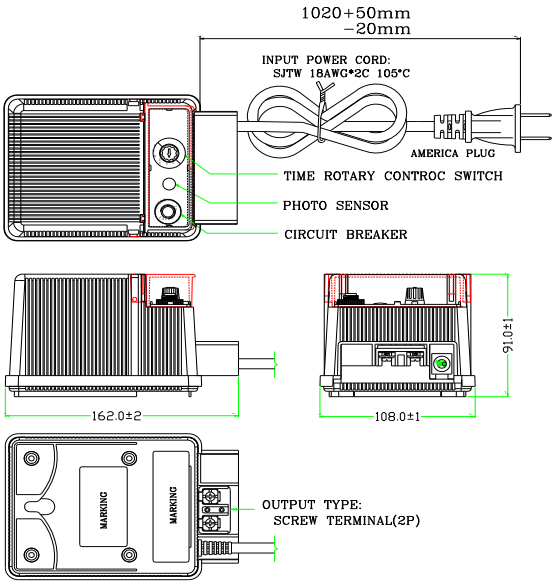

ELECTRONICAL SPECIFICATION

Input Voltage	***120***	Volts
Frequency (Hz)	***60***	Hz
Power Rated (W)	***110***	W
Exciting Current With No load	***160***	mA Max
Exciting Current With Full load	***920***	mA Max
Output Voltage	***12.0***	Volts±5%
Output Current	***7.33***	Amp
Output Voltage Without Load	***12.5***	Volts±5%
HI-POT :		
Test Time	***1***	Min
PRI TO SEC	***1250***	Volts
PRI TO CORE	***1250***	Volts
SEC TO CORE	***1250***	Volts
Efficiency	***80***	%
Insulation Class	***B (130)***	℃

c UL us LISTED

Input Cable:	***SJTW 18AWG*2C 105 ℃ 1M LONG AMERICA PLUG (2PIN)***
Output Cable:	***SCREW TERMINAL(2P)***

MECHANICAL SPECIFICATION

Dimensions (L*W*H)	***162.0*108.0*91.0***	mm
Weight	***2240***	g
Environment:		
Operating Temperature	***-10 To 35***	℃
Storage Temperature	***-20 To 70***	℃
RELATIVE HUMIDITY	***90% RH***	

ELECTRICAL CIRCUIT

