


**Auron 65****Description:**

Introducing our LED High Bay Light: The ultimate replacement for metal halide fixtures. Its all-in-one design allows for adjustable CCT, beam angle, and wattage, meeting diverse lighting needs effortlessly. With options like the U bracket installation kit and motion PIR sensor with remote control, experience convenience and versatility like never before.



Model: HYL200H65112CBKAG

Optical:

CCT:	4000K /5000K
Lumen Efficacy@4000K:	160 LM/ W
Lumen Efficacy@5000K:	150 LM/ W
Lumen flux(±10%):	32000LM@4K-200W
LED Type:	LED 2835
CRI:	Ra80/90

Electrical:

Rated Power:	200 / 160 / 120W
Input voltage:	100-277VAC, 50 / 60 Hz
Beam angle:	60°/85°/105° selectable
Power factor:	>0.95

Life:

Life time of LED @Ta=25°C:	83000hrs-L80 135000hrs-L70
Warranty:	5 Years


General:

Dimmable Solution:	0-10V
IP:	IP65
IK:	IK08
Operating temperature:	-30°C to + 50°C(-22°F to +122°F)
Finish color Availability:	Black
Applications:	Warehouse /Industrial facility /Exhibition center Shopping Mall / Gymnasium /Toll Station




Auron 65


DIMENSIONS

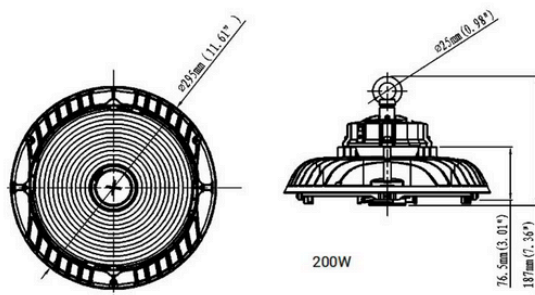

200W

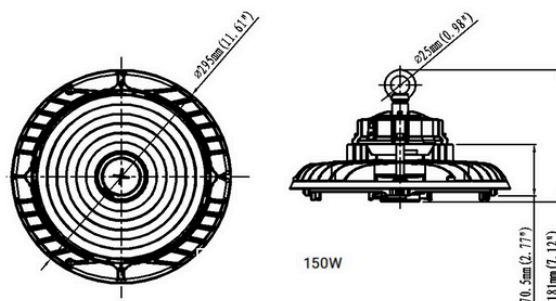


150W

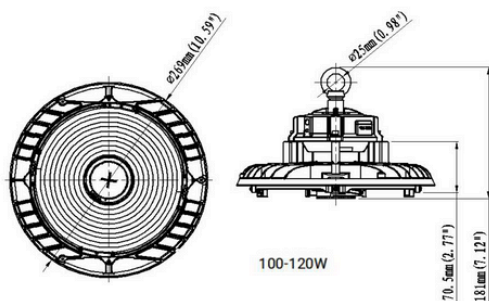


100-120W

Features

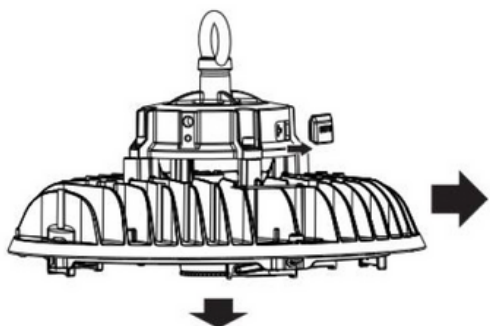


Power Selectable

Caution:
Please power off the luminaire before adjusting the DIP switch.
Please do not use metal tool to adjust the DIP switch.
Please adjust the switch gently.

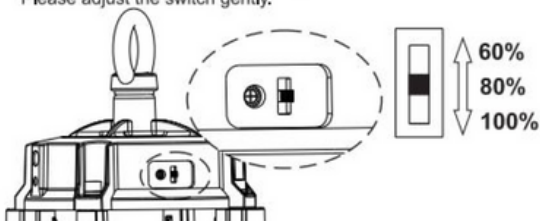

2 CCT Selectable

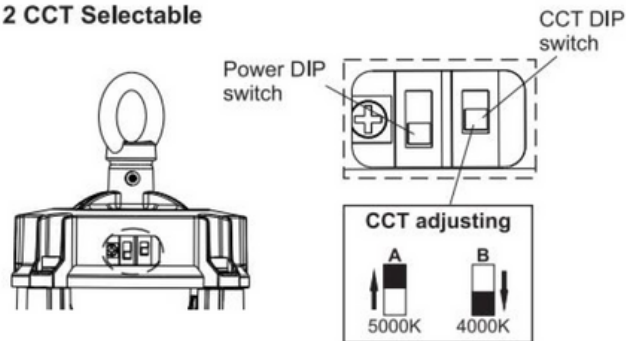



Auron 65


Additional Accessories

Ceiling mounting



Adjustable Bracket


Spcc Material with outdoor powder coding




PC Reflector



100W/120W




150W/200W




Aluminum Reflector

100W/120W

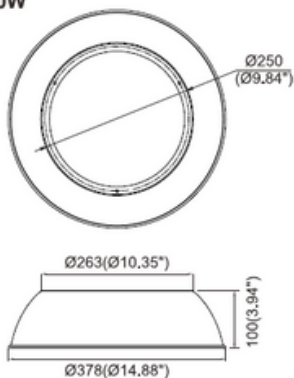

150W/200W

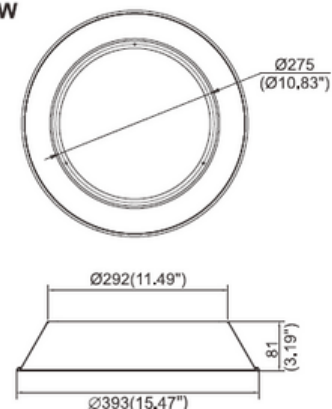



Auron 65

Loop Mounting




PIR Sensor

61DX28Hmm




PHOTOMETRY

150W/200W (Selectable) beam angle

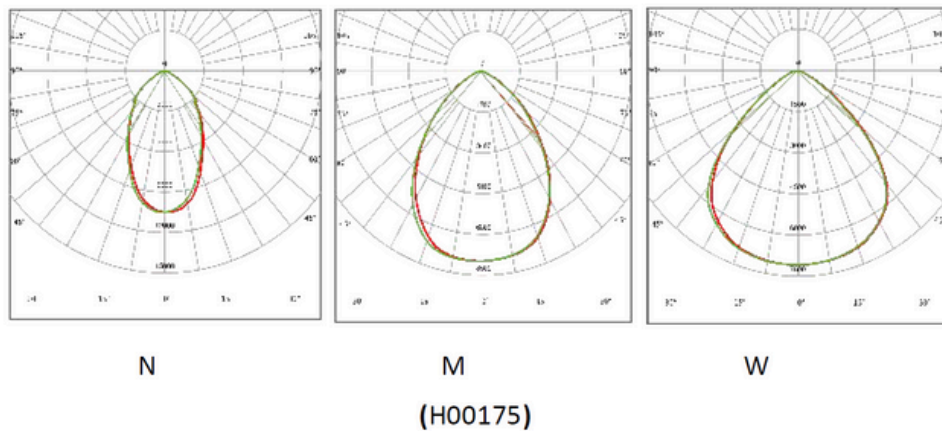


100W/120W (Selectable) beam angle

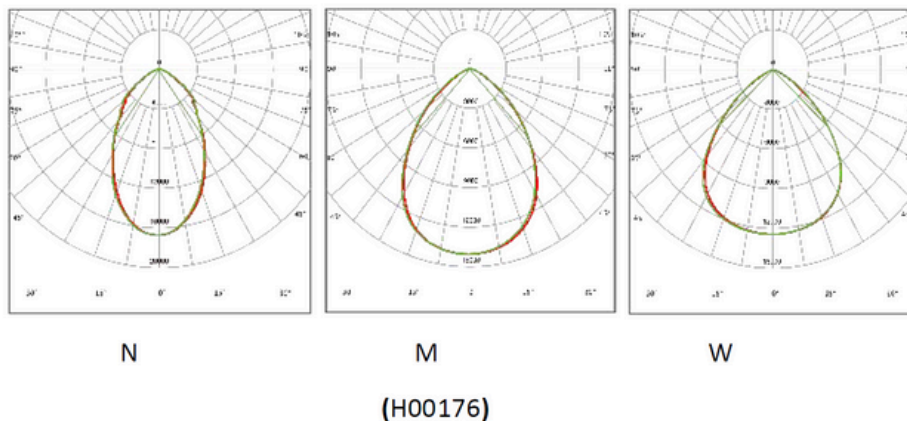




Auron 65

Installation Instructions

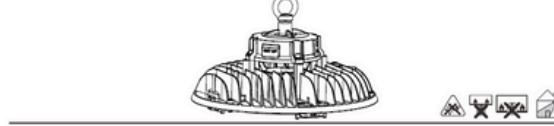


Physical Dimensions(Unit: mm/inch)

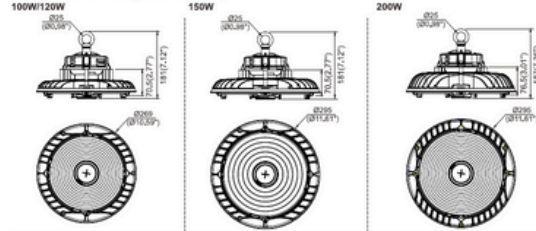



Product Specifications	100W/120W	150W	200W
Input Voltage	100-277 VAC / 120-277 VAC / 100-240 VAC / 220-240 VAC (Subject to the input voltage on nameplate)		
Power Frequency	50 / 60 Hz		
Outlook Dimensions	Ø265x181mm(Ø10.5"x7.12")	Ø295x181mm(Ø11.6"x7.12")	Ø295x187mm(Ø11.6"x7.36")
Luminaire Net Weight(±5%)	1.9kg(4.19lbs)	2.2kg(4.85lbs)	2.6kg(5.73lbs)
Working Temperature	-30°C to +50°C(+22°F to +122°F)		
Storing Temperature	-40°C to +70°C(+40°F to +158°F)		

* The weight is subject to the actual object.



Rotatable Lens

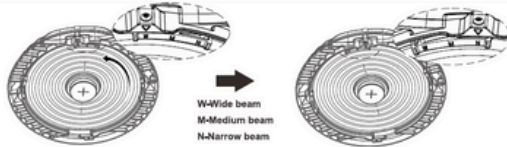


Ceiling Mount(Unit: mm/inch)

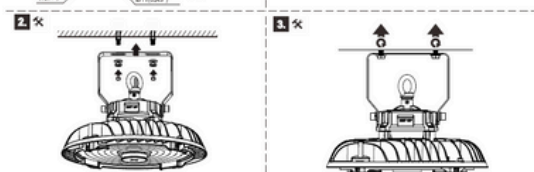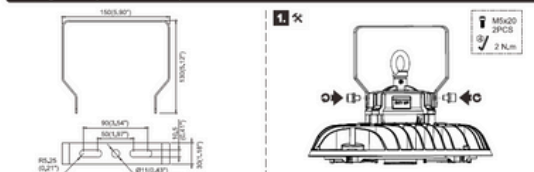

PC Reflectors(Unit: mm/inch)

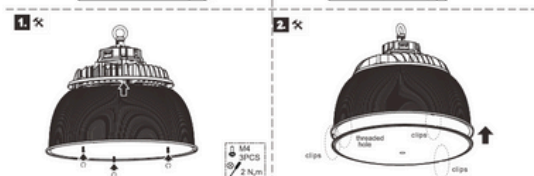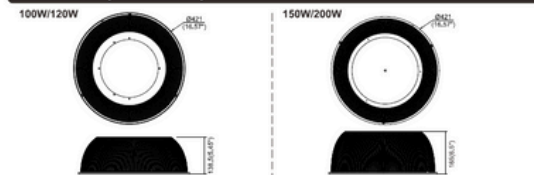


Power and CCT Selectable

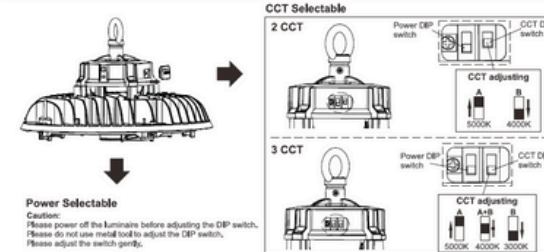

Selectable	200W	150W	120W	100W
100%(±10%)	200W	150W	120W	100W
80%(±10%)	160W	120W	96W	80W
60%(±10%)	120W	90W	72W	60W

Sensor Mount

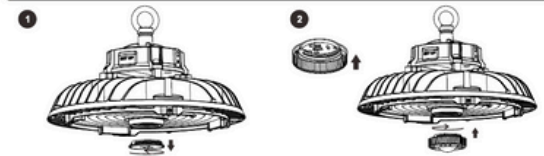

Suspension Mount

