



#### Model PLLS3511223CJL

Optical:

Lumen out put : 125LM/W

Lumens: 3125-3750-4375LM

LED Type: SMD 2835 CRI: ≥80



Rated Power: 25 W / 30W / 35 W CCT Tunable Series: 3500K /4000K / 5000K

Input voltage: 120-347

Power factor: >0.9

Life:

Lumen maintenance: 50,000 hrs Warranty: 2 Years

General:

Dimmable: 0-10V IP: IP40

Operating temperature: -20°C to 50°C

Finish color Availability: White

Certification: ETL, FCC, DLC










## **DIMENSION:**

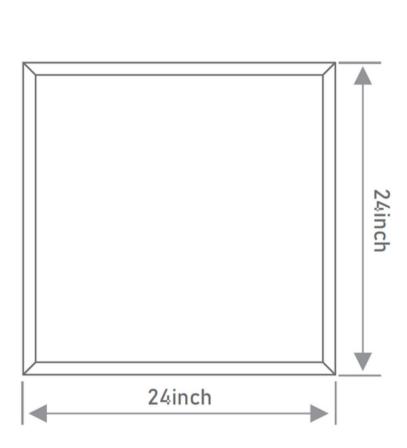








# **Power& CCT Tunable Series**

# Power Tunable

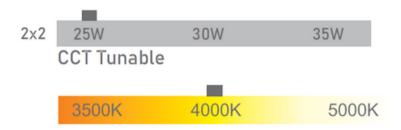




Model No.	Size (inch)	Input Voltage	Watts (W)	CCT (K)	Lpw (Lm/w)	Lumens(Lm)
PLB-XXW22-28CDD[L,M]-01	24*24	AC120-277V or	25	3500	125	3125
			30	4000	125	3750
		AC120-347V	35	5000	125	4375






# **PHOTOMETRIC**

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

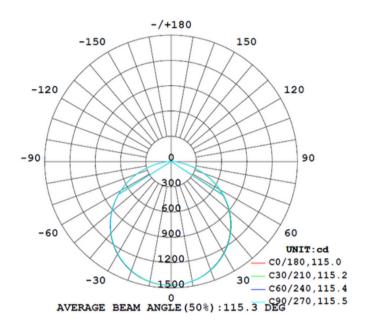


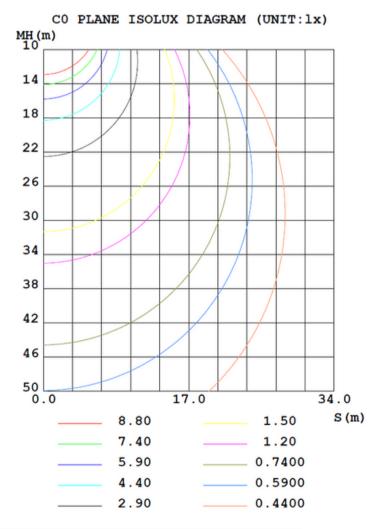





# **ACCESSORIES (Optional)**

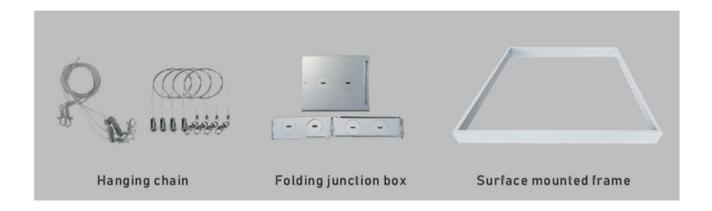

## PROUDUCT ADVANTAGES

