

**LuminaCast Baffle Mini**TRIAC PWM 1-10V DALI IP65
OUTDOOR
RATED**Description:**

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.

**Model: SPL07042003GRKP****Optical:**

CCT:	3000K
Light source:	7 X 0.5W
Luminance:	82LM
LED Type:	SMD 3030
CRI:	>80

Electrical:

Rated Power:	24V=3.5W
Input voltage:	DC 24V
Operating current (MA):	24V=150
Consumption:	24V=3.5
LED driver:	Constant Voltage Input, Constant Current Output

Life:

Lifespan:	50,000 Hrs
Warranty:	2 YEARS

General:

IK:	10
IP:	IP65
Finish color Availability:	Dark Grey
Certification:	cETLus
Operating Temperature:	-20°C~40°C
Dimmable Support	Triac PWM 1-10V Dali






LuminaCast Baffle Mini

TRIAC PWM 1-10V DALI

IP65
OUTDOOR
RATED



DIMENSIONS

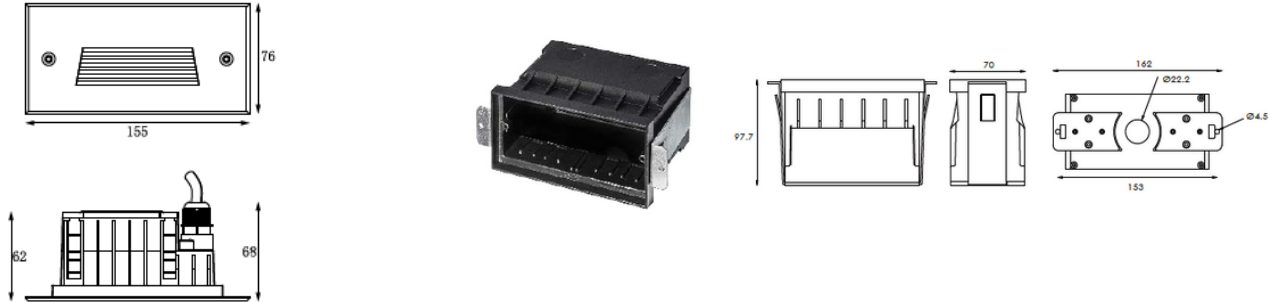


MOUNTING SLEEVE CHARACTERISTIC





- The clips have been specially modified and upgraded to have a stronger structure in order to make up the absence of the screw fixing.



- There are two metal support plates on the bottom of the sleeve It is used for fixing and preventing the mounting sleeve shifting while filling the concrete.
- These will simply install and electrician while they are recessing the sleeves.

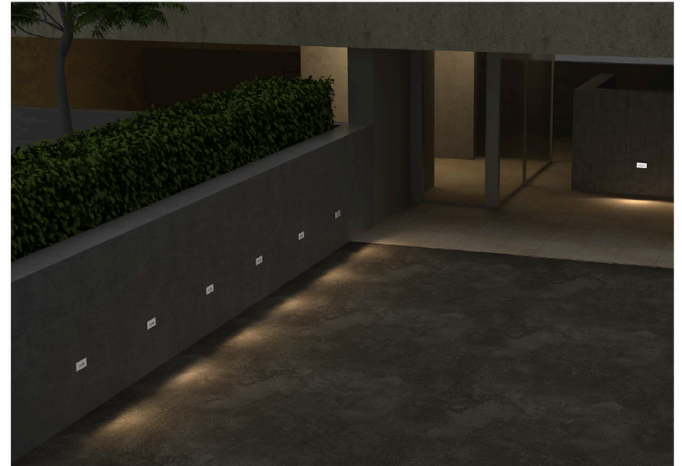

PHOTOMETRIC:

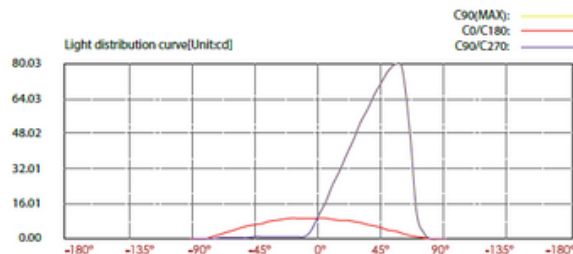

Illuminance at a distance			
Center beam LUX		Beam width	
V	H	V	H
2m	2.33 LUX	1.7m	3.70m
4m	0.58 LUX	3.3m	7.40m
6m	0.26 LUX	5.0m	11.1m
8m	0.15 LUX	6.6m	14.8m
10m	0.09 LUX	8.3m	18.5m
12m	0.06 LUX	9.9m	22.2m
Ver.Spread:44.9		Horiz.Spread:85.7	