



LuminaCast Dot

**Description:**

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.

Model: SPL10140324003SKP**Optical:**

CCT:	3000
Light source:	3×2W OSRAM
Luminance:	379LM
LED Type:	SMD
CRI:	>80

Electrical:

Rated Power:	5.2W
Input voltage:	24VDC
Lens degree(°)Θ1/2:	45°/35°
Operating current (MA):	24V=200
LED Driver:	Constant Voltage Input, Constant Current Output

Life:

Lifespan:	50,000 Hrs
Warranty:	2 YEARS

General:





IK:	08
IP:	IP65
Finish color Availability:	Brushed Stainless steel
Certification:	cETLus
Operating Temperature:	-20°C~40°C
Dimmable support:	Triac PWM 1-10V Dali

TRIAC**PWM****1-10V****DALI****IP65**
OUTDOOR
RATED**OSRAM**



LuminaCast Dot




PRODUCT SIZE

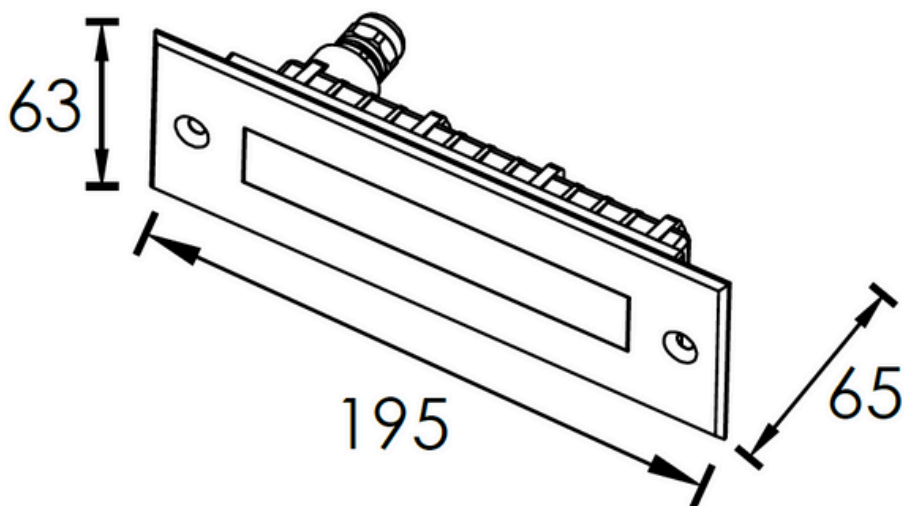



LuminaCast Dot


PHOTOMETRIC

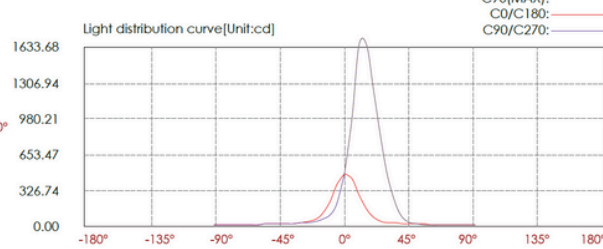

Lux distance cure

Center beam LUX	Beam width V	H
2m 116.23 LUX	0.7m	0.6m
4m 29.06 LUX	1.5m	1.3m
6m 12.91 LUX	2.2m	1.9m
8m 7.26 LUX	3.0m	2.5m
10m 4.65 LUX	3.70m	3.10m
12m 3.23 LUX	4.5m	3.8m

Ver.Spread:21.2 Horiz.Spread:17.8

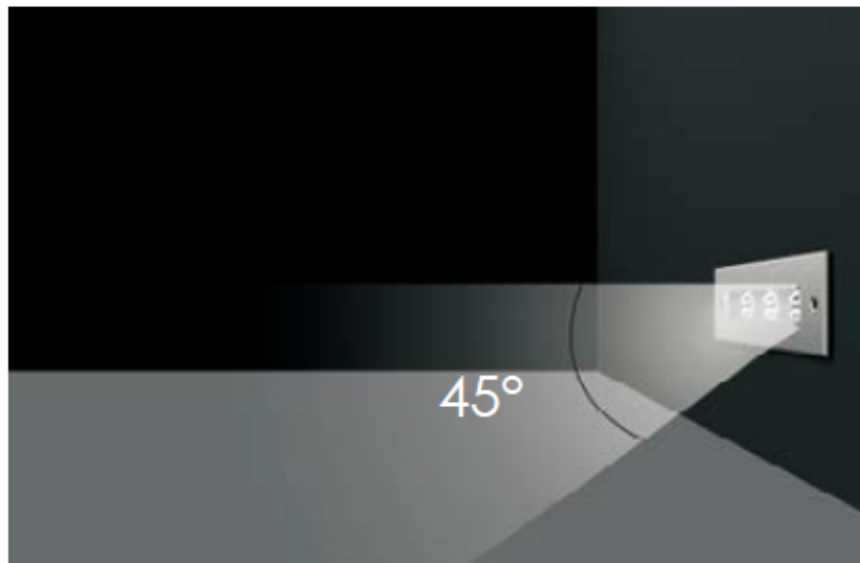

• Impression Drawing of Lens