



### LuminaCast Dot

TRIAC PWM 1-10V DALI



OSRAM



#### Description:

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.

**Model: SPL10140324003SKP**

#### Optical:

CCT:	3000
Light source:	3×2W OSRAM
Luminance:	379LM
LED Type:	SMD
CRI:	>80



#### Electrical:

Rated Power:	5.2W
Input voltage:	24VDC
Lens degree(°)Ø1/2:	45°/35°
Operating current (MA):	24V=200
LED Driver:	Constant Voltage Input, Constant Current Output

#### Life:

Lifespan:	50,000 Hrs
Warranty:	2 YEARS

#### General:

IK:	08
IP:	IP65
Finish color Availability:	Brushed Stainless steel
Certification:	cETLus
Operating Temperature:	-20°C~40°C
Dimmable support:	Triac PWM 1-10V Dali








### LuminaCast Dot

#### PRODUCT SIZE




#### PHOTOMETRIC

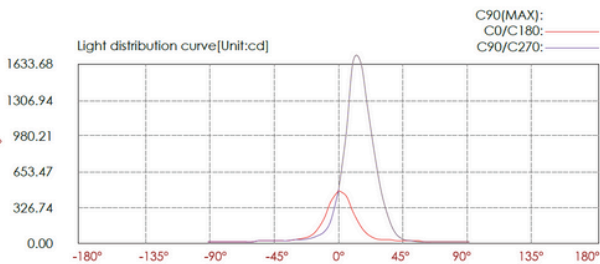

Lux distance curve

Illuminance at a distance		Beam width	
Center beam LUX		V	H
2m	116.23 LUX	0.7m	0.6m
4m	29.06 LUX	1.5m	1.3m
6m	12.91 LUX	2.2m	1.9m
8m	7.26 LUX	3.0m	2.5m
10m	4.65 LUX	3.70m	3.10m
12m	3.23 LUX	4.5m	3.8m

Ver.Spread:21.2 Horiz.Spread:17.8

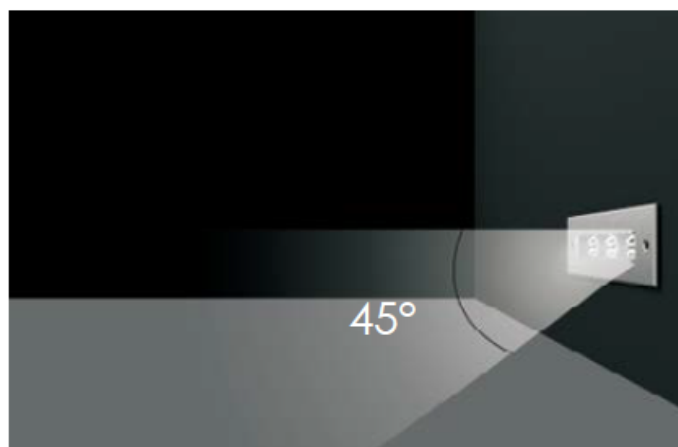

#### • Impression Drawing of Lens