

WALL PACK LED LIGHT WP06





Description:

The slim wall pack is designed for areas like outdoor lighting and courtyard illumination, which can increase security in outdoor common areas and enhance building exteriors by brightening doorways and pedestrian walkways



Optical:

CCT: 3CCT 3000 / 4000 / 5000K selectable

Lumen Efficacy: 140LM/W
LED Type: Lumileds 2835
CRI: Ra70 (Ra80 optional)



Electrical:

Rated Power: 12W / 25W / 30W

Input voltage: 100-277 VAC 50 / 60 Hz

Beam angle: U00C04
Power factor: ≥0.9



Lumen maintenance: 54,000hrs Warranty: 2 YEARS



Dimmable Solution: N/A IP: IP66 IK: IK08

Operating temperature: -30°C to + 50°C

Material: Aluminum Alloy

Finish color Availability: Powder Coating

Fixture Color: Sliver gray

Certification: cETLus

Application: Building Exteriors, Countryard









WALL PACK LED LIGHT WP06



DIMENSIONS:

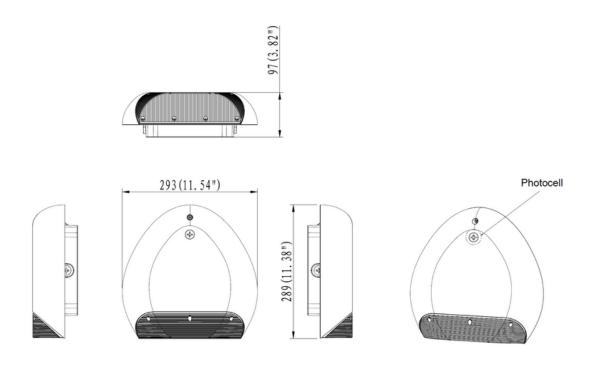

PHOTOMETRY:




Type IV - Very Short




WALL PACK LED LIGHT WP06




DIMENSIONS

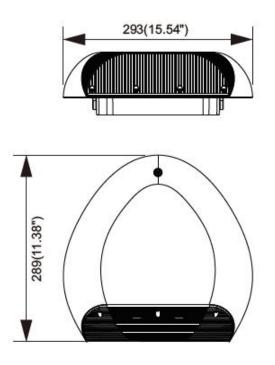



MOUNTING OPTIONS:



Wall Mounting

ACCESSORIES:



Photocell control