



EnduraBeam

Description:

45 series LED Flood Light is available in two sizes, wattage tunable option range from 45W - 300W so that it can meet various applications. 45 series comes with field-adjustable color temperature and power adjustable option as well as compatibility smart control like photocell. It's also available with various mounting options, including slipfitter mount, Yoke mount, and wall mount for flexible installations.



Model: FDL150113CBKAG

Optical:

CCT:	3CCT 3000K, 4000K, 5000K
Lumen out put:	6750Lm , 11250Lm , 16875Lm , 22500Lm
Lumen Efficacy:	150Lm / W
LED Type:	SMD
CRI:	Ra70

Electrical:

Rated Power:	150W Power Selectable, 30%, 50%, 75% and 100%.
Input voltage:	AC100-277 VAC, 50 /60 Hz
Beam angle:	F00402 (7H X 5V), 35 X 85°
Power factor:	>0.9

Life:

Lumen maintenance:	50,000hrs
Warranty:	3 Years

General:


Dimmable Solution:	(0 -10V)
Control:	On / Off Switch / Photocell
IK:	IK08
IP:	IP66
Operating temperature:	-30°C to + 50°C
Finish color Availability:	Black powder coating
Certification:	cETLus






EnduraBeam

DIMENSIONS:

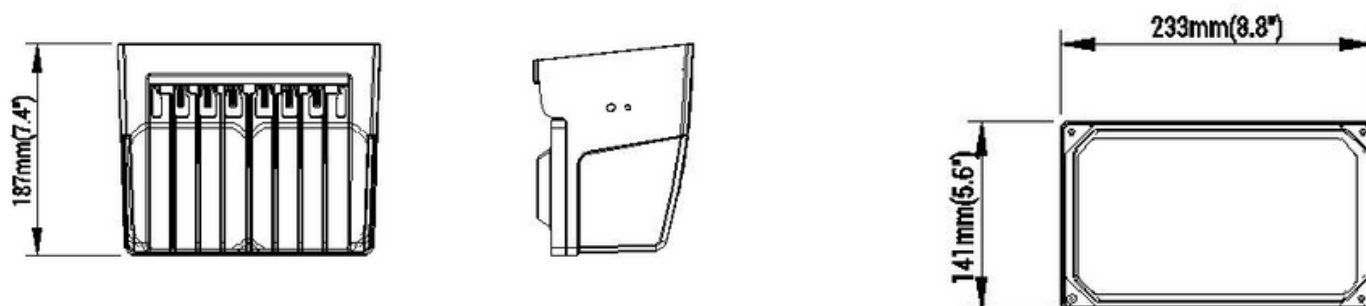

Single module

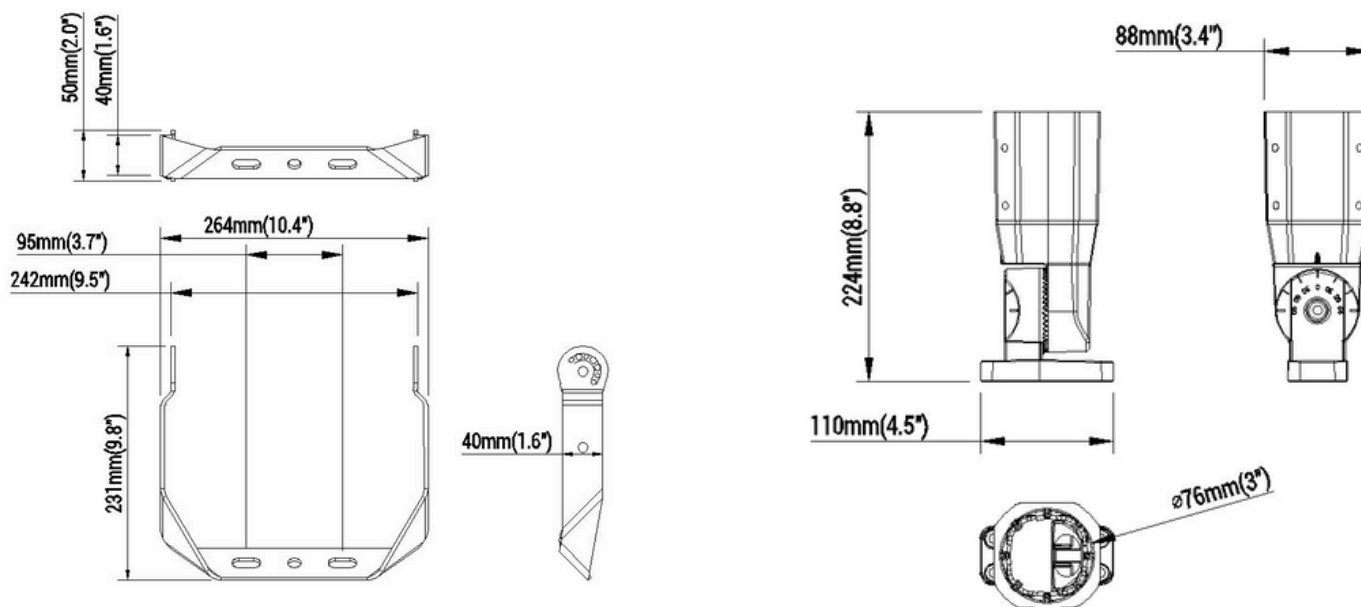


Ø76mm Slipfitter




EnduraBeam

PHOTOMETRY:

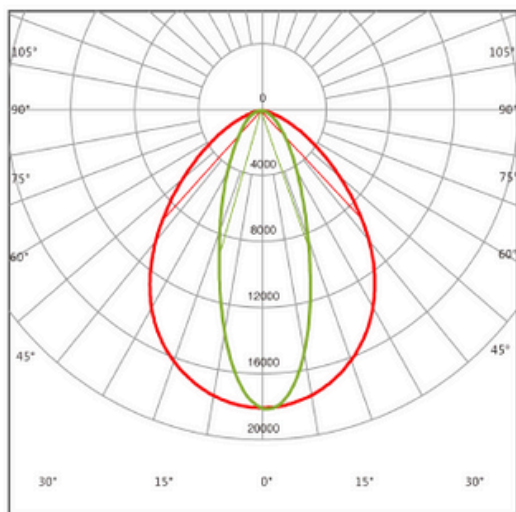

F00402 (7Hx5V)

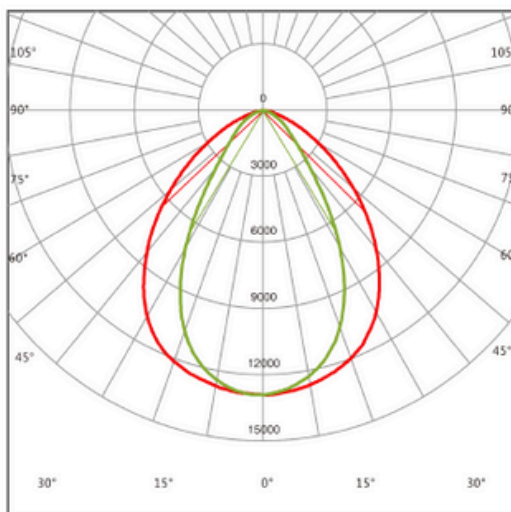

F00403 (7Hx6V)