

**Silmore****Description:**

Introducing our LED Wall Pack: Designed with a slim profile to minimize space while delivering an impressive 125 lumens per watt. Enhance the modern aesthetic of your commercial or residential building facade with this sleek lighting solution. Easy installation on standard electrical junction boxes makes this product a convenient choice for any application. Illuminate your space efficiently and stylishly with our LED Wall Pack.

Model: WLLP0530 / WLLP0540 / WLLP0570

Optical:

CCT:	3000K, 4000K(selectable)
Lumen Efficacy:	130LM/W
LED Type:	LED 3030
CRI:	Ra70

Electrical:

Rated Power:	9-70W Watt Selectable
Input voltage:	100-277 VAC 50 / 60 Hz
Beam angle:	U04201 / R08401
Power factor:	≥0.9 at Max Load

Life:

Lifespan:	48,000hrs
Warranty:	2 Years


General:

Dimmable Solution:	Dimmable
IP:	IP66
IK:	IK08
Operating temperature:	-30°C to + 45°C
Material:	Cast Aluminum
Finish color Availability:	Powder Coating
Fixture Color:	Sliver gray
Certification:	cETLus
Application:	Security / Pathway and Perimeter lighting / Building facades



Silmore

DIMENSIONS

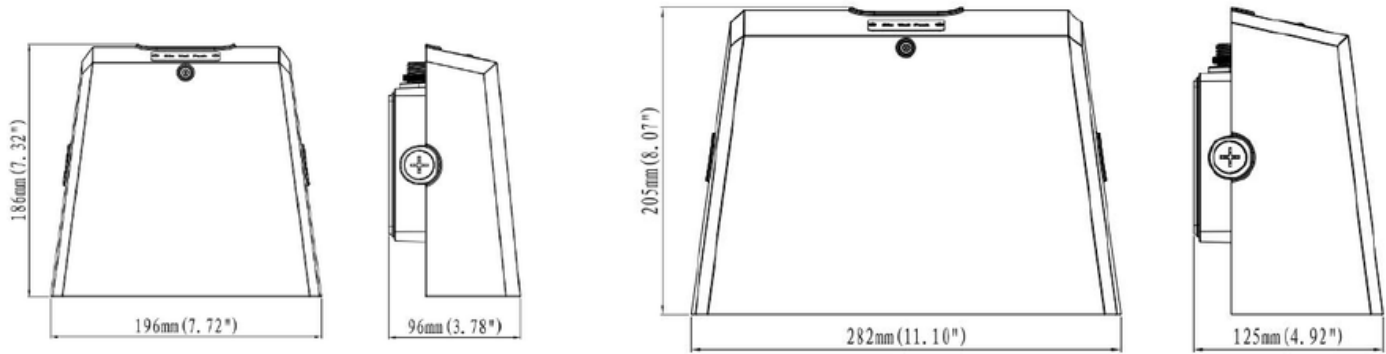


30W

40W/70W

Mounting Options


Wall Mounting

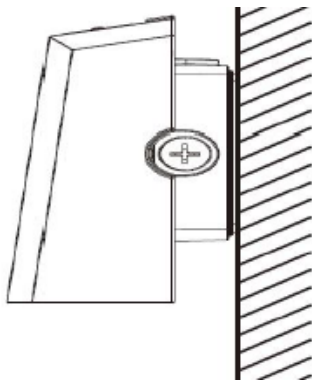

New Features

4 Wattage selectable


The CCT could be set to Natural white(4000K) and Warm White(3000K).

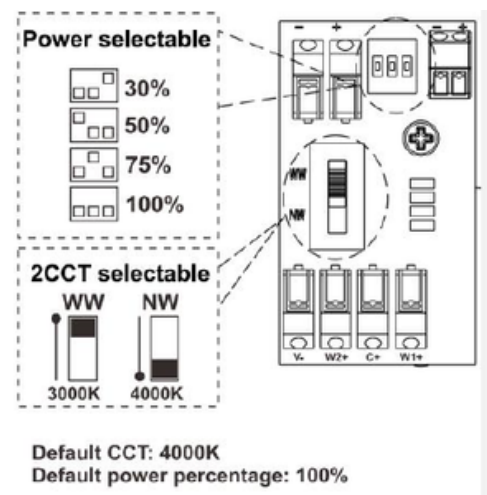




Silmore

PHOTOMETRY

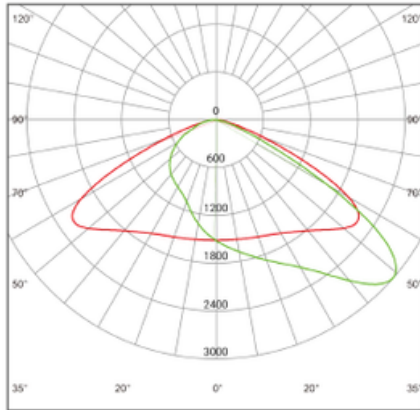

U04201
30W

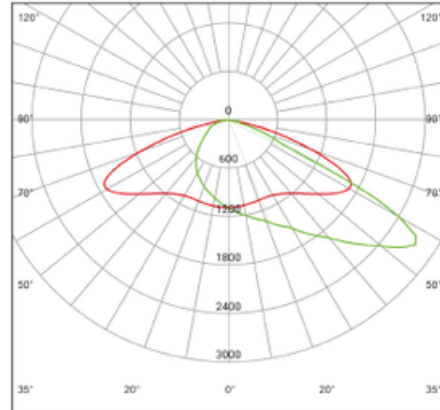

R08401
40W/70W

Specifications:

Model No.	WLLP0530	WLLP0540	WLLP0570
Power (Watt)	9/15/22.5/30	12/20/30/40	21/35/52.5/70
Efficacy (lm/W)	130LM/W	150LM/W	135LM/W
Luminous Flux (Lm)	3900LM	6000LM	9450LM
Size (Inch)	196x96x186mm (7.72x3.78x7.32")	282x125x205mm (11.10x4.92x8.07")	282x125x205mm (11.10x4.92x8.07")