



## LumaFlex Gimbal 4000

### Description:

LumaFlex Gimbal 4000 – a cutting-edge 4" recessed downlight designed for superior brightness and versatility. Boasting a high-lumen output, this light delivers exceptional illumination for any setting. Its adjustable lens angle allows precise control over light direction, making it perfect for highlighting specific areas or creating dynamic lighting effects. Illuminate your space with the flexibility and brilliance of the LumaFlex Gimbal 4000.



**Model: DNLGRXX11045CCWHLB**

### Optical:

CCT:	5CCT Tunable 27K - 3K - 35K - 4K - 5K
Lumen out put:	1020LM-1190LM - 1500LM
Lumen Efficacy:	85LM/W - 100LM/W
LED Type:	COB
CRI:	>80Ra

### Electrical:

Rated Power:	12W/14W/15W
Input voltage:	AC 120V
Beam angle:	15° / 24° / 38° / 60°

### Life:

Lumen maintenance:	50,000 Hours
Warranty:	2 Years

### General:


Dimmable Solution:	Triac / 0-10V
IP:	IP44
Material:	Die Casting ADC12
Finish color Availability:	Matt White + Lens
Certification:	ETL, Energy Star, FCC
Type:	IC AIRTIGHT





**LumaFlex Gimbal 4000**

**PHOTOELECTRICITY**

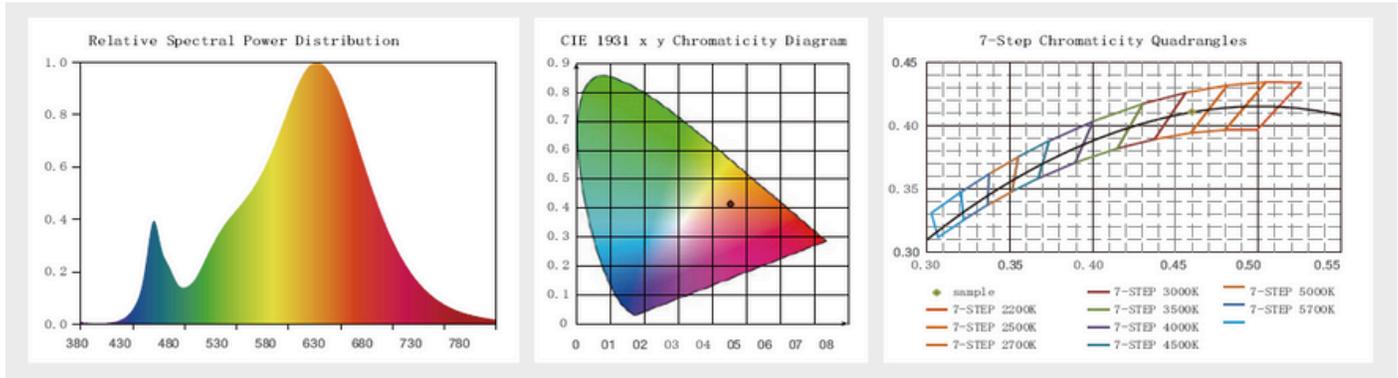


**DIMENSION**

Cut out:103 - 115mm( 4"- 4.5")

H:50mm (2")

Dia:130mm (5")

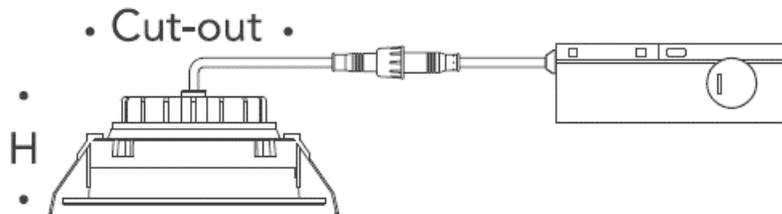

**Ordering table**

**Sample :DNLG-12-11-85-TR-WH**

Model	Watt	Input	lumens/w	Dimming	Finish
DNLG	12 14 15	120: 11 110-277:UNV	85lm/w: 85 100lm/w: 100	Triac :TR 0-10V:10V	White :WH Black :BK