



Lumeo R5



DAMP
LOCATION



Description:

The 5-inch recessed LED slim panel light is a compact and modern lighting solution for indoor & Out door (DRY/ DAMP) spaces. With its slim design, it seamlessly blends into ceilings, providing uniform and efficient illumination. Easy to install and with options for dimming, it offers versatility and convenience. This long-lasting fixture enhances both the functionality and aesthetics of any room.



Model: PLLR1011055CF4LB

Optical:

CCT:	3000K
Lumen out put:	850LM
Efficacy:	85lm/W
LED Type:	SMD
CRI:	85+

Electrical:




Rated Power:	10W
Input voltage:	120V 50/60Hz
Beam angle:	120°

Life:

Lifespan:	50,000HRS
Warranty:	2 Years

General:

Dimmable Solution:	Triac
Environment:	Damp Location
Type:	IC Rated
Operating temperature:	--40°C to +40°C (-4 °F-104°F)
Installation:	Recessed ,Insulated /drop ceilings
Certification:	cETLus





Lumeo R5




DAMP
LOCATION

IC
RATED

SSS
AIRTIGHT




PHOTOELECTRICITY

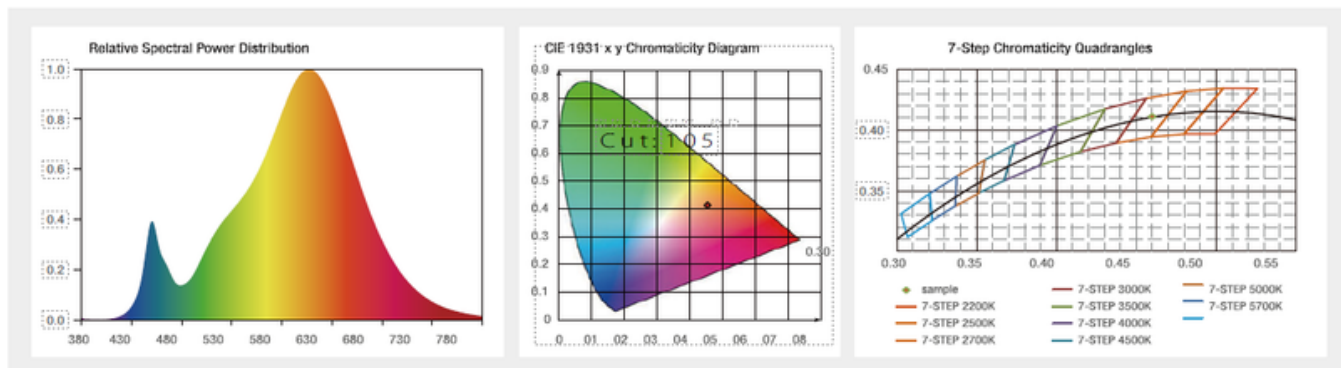

ASSEMBLY INSTRUCTIONS:


Fig.1



Step1: Connecting

Using wire nuts, connect green ground wire of cable to green wire on box. Connect white wire of cable to white of box. Connect black wire of cable to black wire of box.


Fig.2



Step2: Inserting

Insert hardwire box through the mounting hole.


Fig.3



Step3: Twisting

Connect the fixture to the hardwire box by inserting and twisting the male/female connectors.

Fig.4



Step4: Pushing

Push spring loaded clips on the fixture upwards and insert fixture base into the mounting hole. Release the clips and fixture will be pulled flush to the ceiling.