

**LuminaCast Diffuse****Description:**

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.

**Model: SPLXX0324003KKP****Optical:**

CCT:	3000K / 4000K / 6000K
Light source:	L0180C010AR - 20×SMD5050
LED Type:	SMD5050
CRI:	>80

Electrical:

Rated Power:	2.4W	4.8W
Lumen out put:	34lm@3K	68lm@3K
Input voltage:	24VDC / 120VAC / 110-277 VAC	
Lens degree:	120°	
LED driver:	Constant Voltage Input ,Constant Current Output	

Life:

Lumen maintenance:	50,000 Hrs.
Warranty:	3 Years Limited warranty

General:

IK:	09
IP:	IP65 Outdoor
Finish color Availability:	Brushed Stainless steel
Front Plate:	Hard chrome plated Stainless steel SUS316
Light Housing:	12# Die-casting grey powder coated aluminum. T=60-80µm Adhesion of ISO class 1/ASTM class 4B
Application:	Concrete Step / Retaining walls
Certification:	cETLus For 24VDC Input
Operating Temperature:	-20°C~40°C










LuminaCast Diffuse

Product Size:

1014 8"

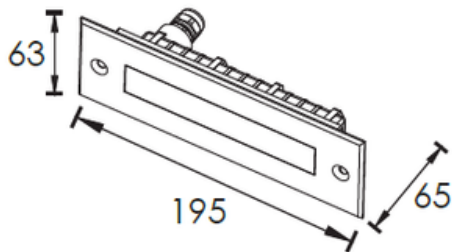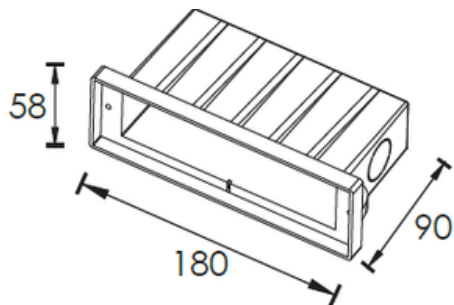

2014 13"

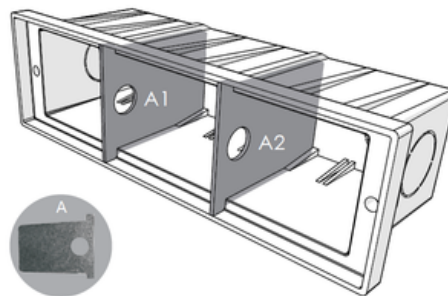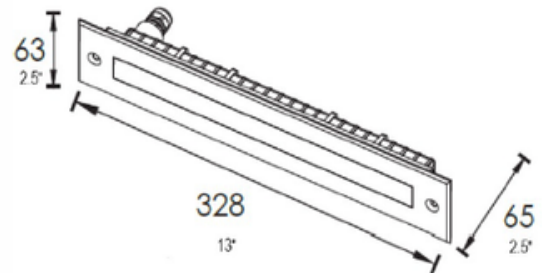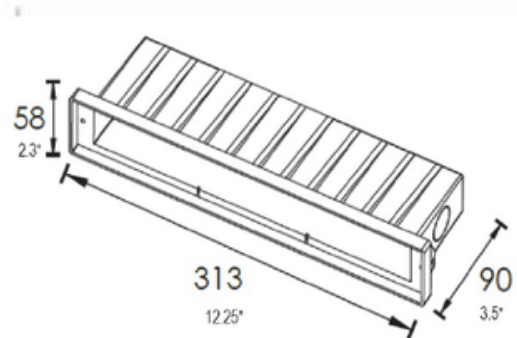





LuminaCast Diffuse

PHOTOMETRIC:

Model : 1014 8"

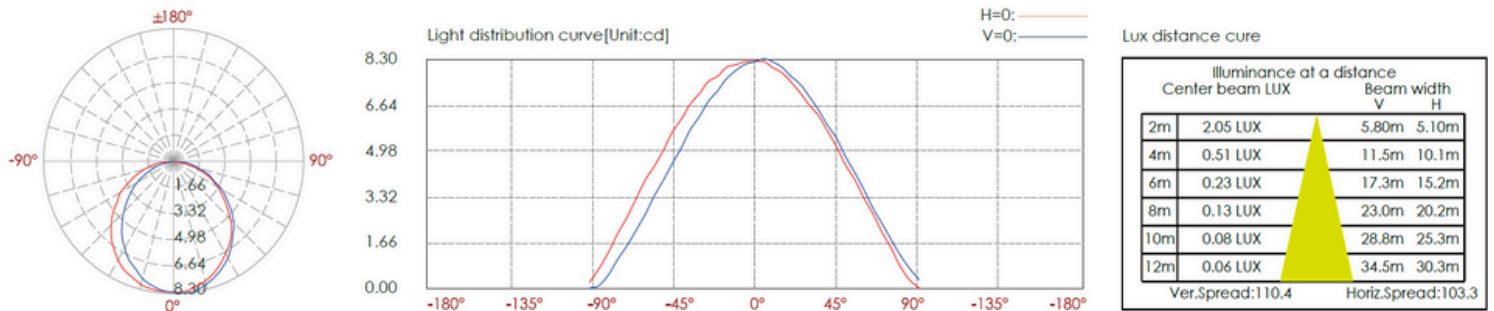

Model : 2014 13"

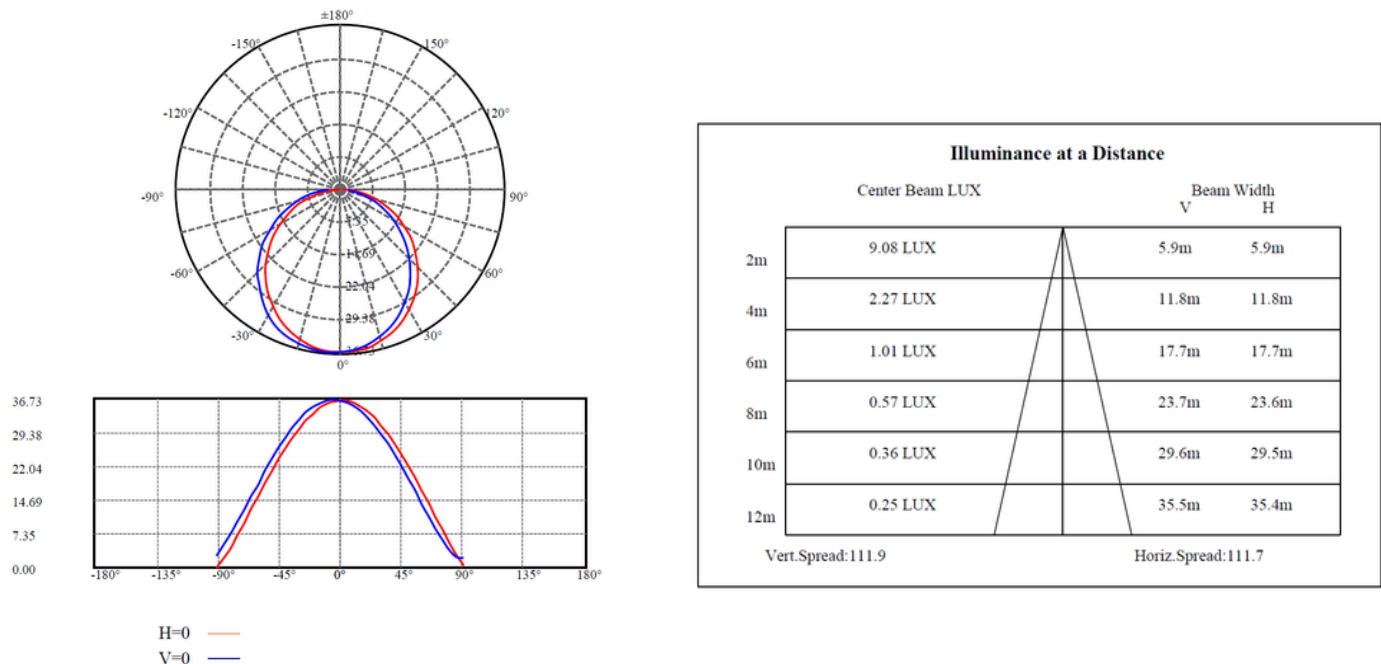



LuminaCast Diffuse

Example: Spl1014-03-24-30-FG

Model	Wattage	Voltage	CCT	LENS
SPL1014	34lm@2.4W -3000K :03 125lm@2.4W-3000K-FG:03 ①	24VDC :24 110-277VAC:110	2700K:27 3000K:30 4000K:40 6000K:60	Standard : S Frosted Glass: FG ①
SPL 2014	68lm@4.8W-3000K :05 250lm@4.8W-3000K-FG :05 ①			

①: Lumen increase achieved by using frosted glass instead of painted plastic as standard

