



### LuminaCast Smooth

TRIAC PWM

1-10V

DALI


IP65  
OUTDOOR  
RATED

OSRAM



#### Description:

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.



#### Model: SPLD1F02243KDGKP

##### Optical:

CCT:	3000
LIGHT SOURCE:	12X0.2
Luminance:	66LM
LED Type:	SMD
CRI:	>80

##### Electrical:


Rated Power:	24V=5.7W
Input voltage:	24VDC
Lens Degree:	120°
Operating current (MA):	24V=52

##### Life:

Lifespan:	50,000 Hrs
Warranty:	2 YEARS

##### General:

IK:	10
IP:	IP65
Finish color Availability:	Brushed Stainless steel
Certification:	cETLus

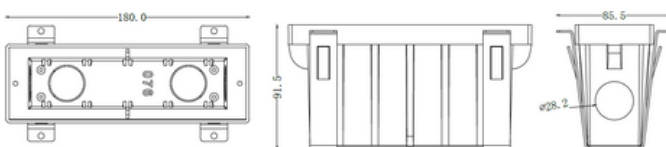



## LuminaCast Smooth

TRIAC PWM 1-10V DALI



IP65  
OUTDOOR  
RATED



OSRAM



### PHOTOMETRIC

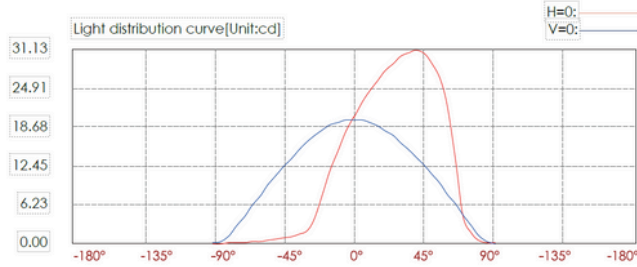

Lux distance curve			
Illuminance at a distance		Beam width	
Center beam LUX		V	H
2m	4.99 LUX	3.00m	4.70m
4m	1.25 LUX	5.90m	9.50m
6m	0.55 LUX	8.90m	14.2m
8m	0.31 LUX	11.8m	19.0m
10m	0.20 LUX	14.8m	23.7m
12m	0.14 LUX	17.7m	28.3m
Ver.Spread:72.9		Horiz.Spread:99.8	

### APPLICATION

