



LuminaCast Louvered

TRIAC PWM 1-10V DALI IP65 OUTDOOR RATED RoHS COMPLIANT CE OSRAM CIT



Description:

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.

Model: SPL540524003KDGKP

Optical:

CCT:	3000
Light Source:	54 X SMD5630
Luminance:	44LM
CRI:	>80

Electrical:

Rated Power:	24V=5.3W
Input voltage:	24V DC
LED Driver:	Constant Voltage Input, Constant Current Output

Life:

Lifespan:	50,000 Hrs
Warranty:	2 Years

General:

Dimmable Support:	Triac PWM 1-10V Dali
IP:	65
IK:	09
Operating temperature:	-20°C~40°C
Finish color Availability:	Die-casting grey powder coated aluminum
Certification:	cETLus



LuminaCast Louvered

TRIAC PWM 1-10V DALI








IP65
OUTDOOR
RATED



OSRAM



PRODUCT SIZE

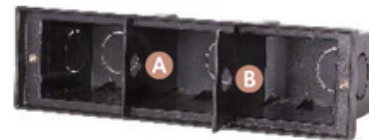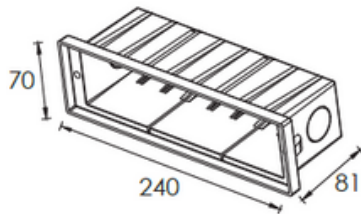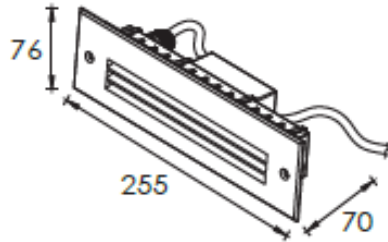

.The above picture-the support plate "A" and "B" are used for preventing deformation of the sleeve during the construction installation process.



Please remove the supporting plate "A" and "B" from the mounting sleeve before the lamp installation



LuminaCast Louvered

TRIAC PWM 1-10V DALI IP65 OUTDOOR RATED RoHS COMPLIANT CE OSRAM C11

PHOTOMETRIC

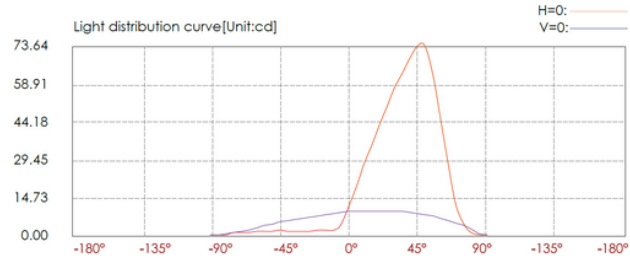

Lux distance curve			
Illuminance at a distance			
Center beam LUX		Beam width	
		V	H
2m	3.28 LUX	4.30m	1.70m
4m	0.82 LUX	8.60m	3.40m
6m	0.36 LUX	12.9m	5.10m
8m	0.20 LUX	17.2m	6.90m
10m	0.13 LUX	21.4m	8.60m
12m	0.09 LUX	25.7m	10.3m
Ver.Spread:94.1		Horiz.Spread:46.5	

APPLICATION

