



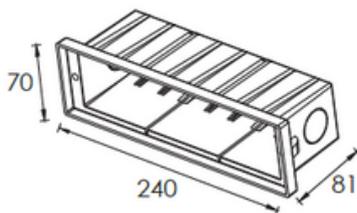

## LuminaCast Louvered

TRIAC PWM 1-10V DALI IP65 OUTDOOR RATED ROHS COMPLIANT CE OSRAM CII



### Description:

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.

### Model: LuminaCast Louvered

#### Optical:

CCT: 3000  
 Light Source: 54 X SMD5630  
 Luminance: CW=47 WW=44  
 CRI: >80

#### Electrical:

Rated Power: 24V=4.8W  
 Input voltage: 24V DC  
 LED Driver: Constant Voltage Input, Constant Current Output

#### Life:

Lifespan: 50,000 Hrs  
 Warranty: 2 Years

#### General:

Dimmable Support: Triac PWM 1-10V Dali  
 IP: 65  
 IK: 09  
 Operating temperature: -20°C~40°C  
 Finish color Availability: Die-casting grey powder coated aluminum  
 Certification: cETLus







### LuminaCast Louvered


TRIAC PWM 1-10V DALI IP65 OUTDOOR RATED RoHS COMPLIANT CE OSRAM CII

#### MOUNTING SLEEVE CHARACTERISTIC

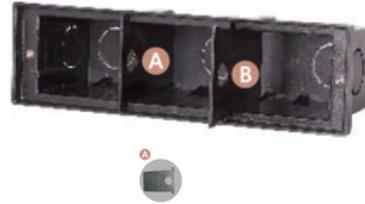



The above picture-the support plate "A" and "B" are used for preventing deformation of the sleeve during the construction installation process.  
Please remove the supporting plate "A" and "B" from the mounting sleeve before the lamp installation

#### SLEEVE (Included)



#### PHOTOMETRIC

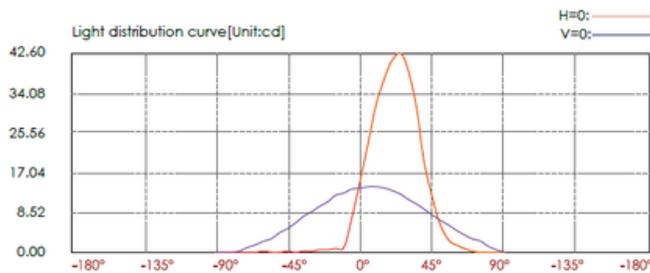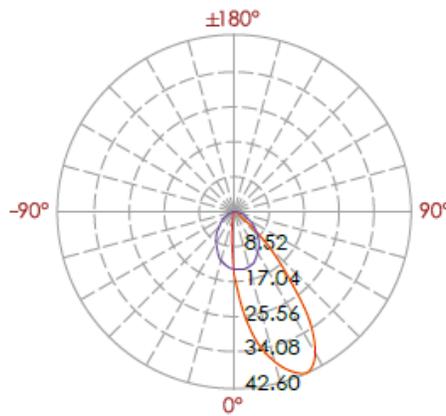

Lux distance cure

Center beam LUX	Beam width V	Beam width H
2m 3.84 LUX	3.20m	1.4m
4m 0.96 LUX	6.40m	2.9m
6m 0.43 LUX	9.70m	4.3m
8m 0.24 LUX	12.9m	5.7m
10m 0.15 LUX	16.1m	7.1m
12m 0.11 LUX	19.3m	8.6m

Ver.Spread:77.8 Horiz.Spread:39.3