



LuminaCast Shade



Description:

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.



Model: SPL280511003KKP

Optical:

CCT:	3000
Light source:	28 X SMD5630
Luminance:	65LM
CRI:	>80

Electrical:

Rated Power:	24V=4.8W
Input voltage:	24V DC
LED driver:	Constant Voltage Input, Constant Current Output

Life:

Lifespan:	50,000 Hrs
Warranty:	2 Years

General:





Dimmable Support:	Triac PWM 1-10V Dali
IP:	65
IK:	09
Operating temperature:	-20°C~40°C
Finish color Availability:	Die-casting grey powder coated aluminum
Certification:	cETLus

**TRIAC PWM 1-10V DALI****IP65**
OUTDOOR
RATED**OSRAM**




LuminaCast Shade

PRODUCT SIZE:

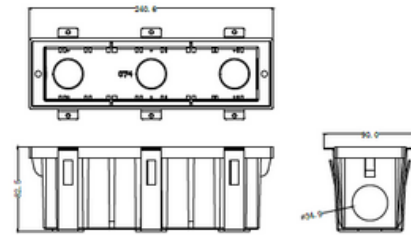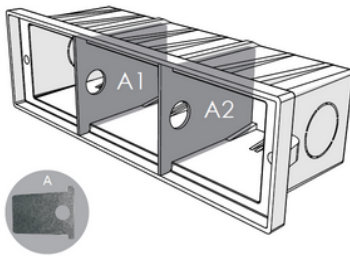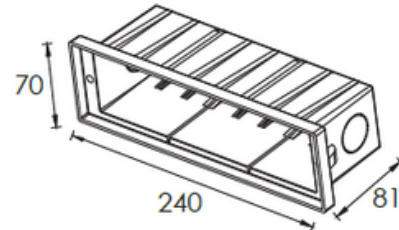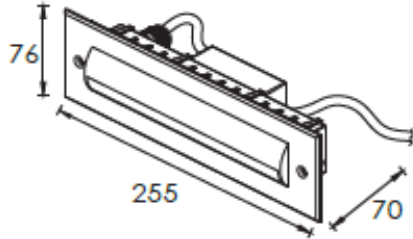

INSTALLATION:

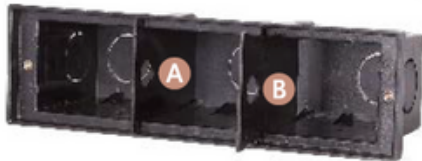

The above picture-the support plate "A" and "B" are used for preventing deformation of the sleeve during the construction installation process.

Please remove the supporting plate "A" and "B" from the mounting sleeve before the lamp installation

