



### LuminaCast Shade

TRIAC PWM 1-10V DALI IP65  
OUTDOOR RATED

RoHS COMPLIANT

CE

OSRAM

CIT



#### Description:

The concrete pour step/wall light offers a sleek and contemporary lighting solution for concrete structures, retaining walls, steps, and stairs. With its low trim profile, it blends seamlessly with the surrounding surfaces. This fixture is highly popular due to its decent power and lumens output. Its easy installation and low maintenance make it a practical choice. The concrete pour step/wall light enhances the ambiance and safety of outdoor spaces effortlessly, adding a stylish touch to any environment.

#### Model: SPL280511003KKP

##### Optical:

CCT:	3000
Light source:	28 X SMD5630
Luminance:	65LM
CRI:	>80

##### Electrical:

Rated Power:	24V=4.8W
Input voltage:	24V DC
LED driver:	Constant Voltage Input, Constant Current Output

##### Life:

Lifespan:	50,000 Hrs
Warranty:	2 Years

##### General:

Dimmable Support:	Triac PWM 1-10V Dali
IP:	65
IK:	09
Operating temperature:	-20°C~40°C
Finish color Availability:	Die-casting grey powder coated aluminum
Certification:	cETLus





### LuminaCast Shade

TRIAC PWM 1-10V DALI






IP65  
OUTDOOR  
RATED




OSRAM



#### PRODUCT SIZE:

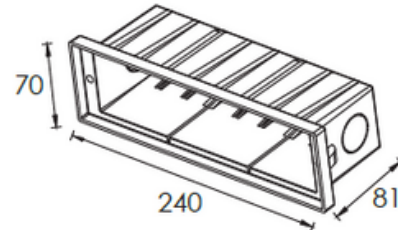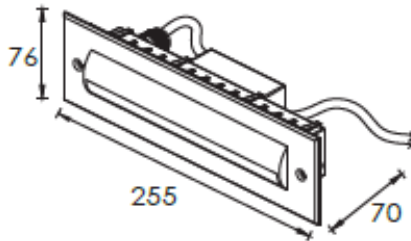

#### INSTALLATION:

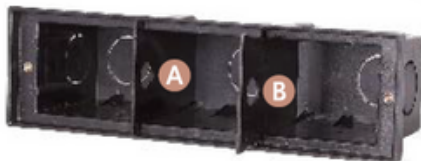

The above picture-the support plate "A" and "B" are used for preventing deformation of the sleeve during the construction installation process.

Please remove the supporting plate "A" and "B" from the mounting sleeve before the lamp installation

