



## Metal Running man Exit Sign Xitron

### Description:

This metal housing exit sign is perfect for industries like food processing, sports facilities, and other environments that require durable, non-plastic solutions. With a 24-hour charge time and a 120-minute discharge, it provides reliable and long-lasting performance, ensuring safety and compliance in challenging industrial settings.



**Model: EEXGCS7120GR**

### Electrical:

Power Light heads :	2.6W (2*1.3)
Light heads lumens :	320lm
Input voltage:	120-347VAC / 6-24 VDC

### Life:

Battery Life PO:	18500 hur
Warranty:	3 Years

### General:

Battery:	3.2V 1000mA
Charging time:	24 Hours
Discharge time:	120 Minutes
Operating temperature:	5°C~40°C (5°F to 122°F)
Mounting :	Wall / Ceiling
Finish Color :	White / Black
Environment :	Dry / Damp location

Certification:	CSA listed meets all requirement in C22.2 No. 141-15, C860-11 comply with ICES-005
----------------	--

Material	22-Guage steel Housing , Thermoplastic ABS Head UL-94-V0 Flame-Retardant , Fire resistance
----------	--






## Metal Running man Exit Sign Xitron


Ordering Table : Example Xitron Combo-120-W-W

Model	Input Voltage	Housing	installation
Xitron Xitron Combo	120:120-347 VAC 24 : 6-24 VDC 120: 120-347 VAC	W:White B: Black	W: Wall C:Ceilling

### Product Dimention

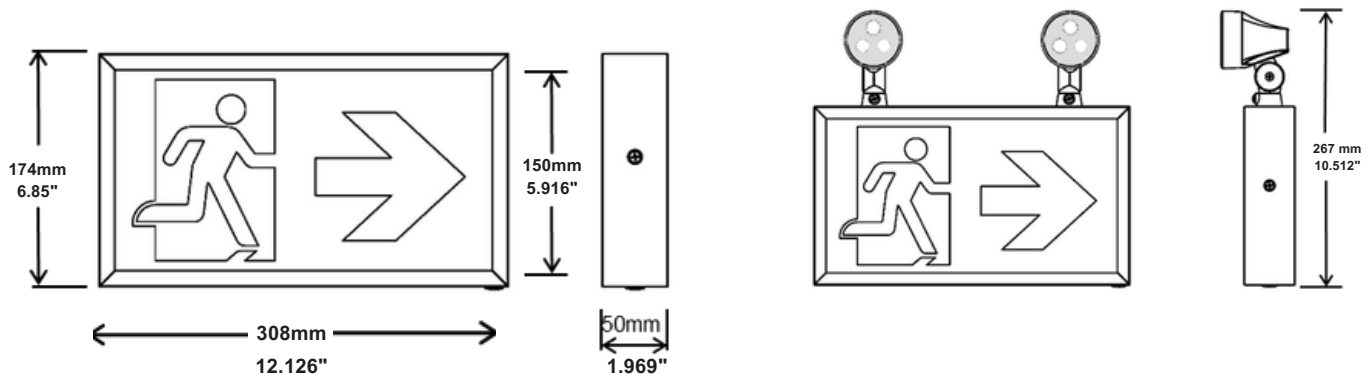

### Mounting Spacing Distance

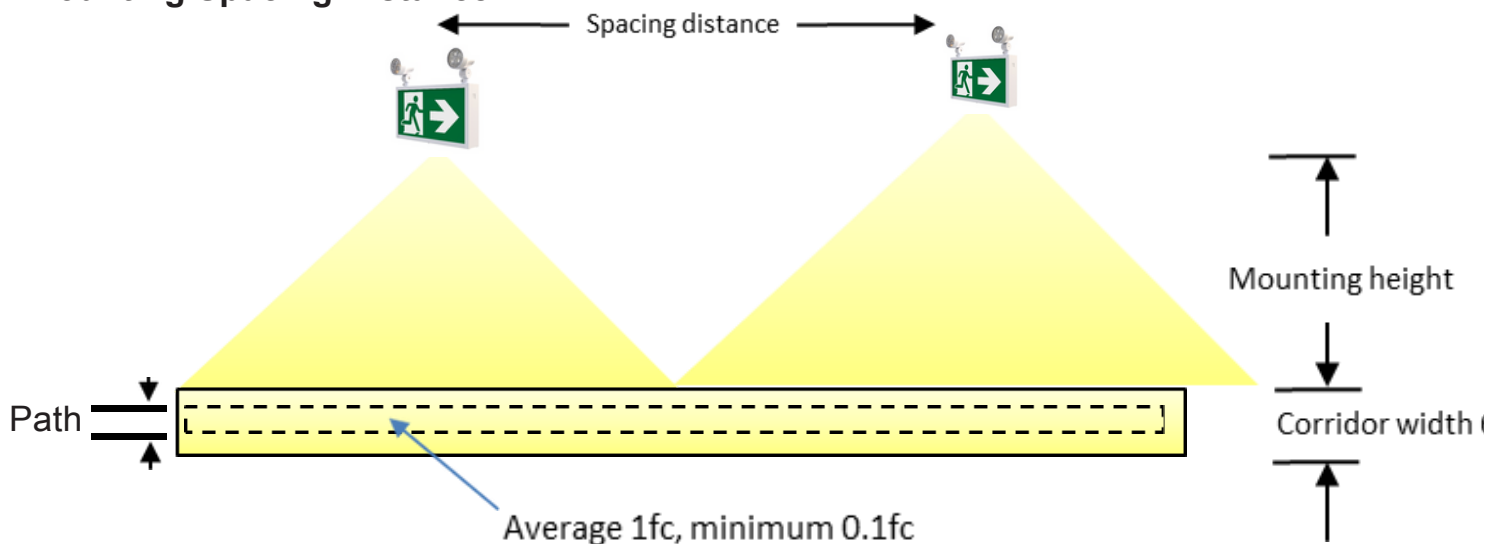



### Metal Running man Exit Sign Xitron

Model No \ Spacing distance	7.5ft height	7.5ft height	10ft height	10ft height
	6ft width corridor 3ft width path	6ft width corridor 6ft width path	6ft width corridor 3ft width path	6ft width corridor 6ft width path
Xitron Combo	43ft	39ft	39ft	36ft

NFPA 101 requires 1.0 foot-candle average and 0.1 foot-candle minimum with a 40:1 maximum/minimum ratio. The corridor used is 100 feet long, 10 feet ceiling with a 6 feet wide walkway and 6&3 feet path of egress for calculation.

The reflectance are 80% ceiling, 50% walls and 20% floors. The fixture mounting height is 7.5 feet /10ft.

#### Pictogram Pack



Arrow left 1pc




Arrow right 1pc



Without Arrow 1pc

#### Photometric

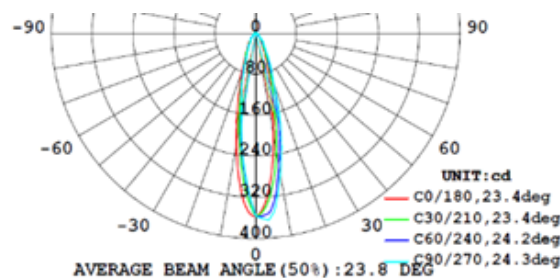

### Features and specifications :

#### CONSTRUCTION

- 22-gauge steel housing with matt white powder coating for enclosure.
- 150mm height visible exit sign, easy replacement of pictogram.
- Friendly configuration design for quick installation.
- Single face as standard, double faces as option
- Suitable for wall, ceiling and side mounting.
- For CS7-EM (combo), installer could chose lamp heads install on - top surface or side surface.

#### ELECTRICAL

- 120 to 347VAC universal voltage, 50/60Hz.
- Recharge time 24 hours, duration time more than 2 hours.
- Trickle charge after battery fully charge.
- Brownout protection circuit.
- Battery over discharge protection.
- Solid-State transfer circuit.
- Test Switch / Charge Indicator light.

#### ILLUMINATION

- Use long-lasting, high efficiency white LEDs.
- LED arrays are operating in normal (AC input) and emergency modes (loss of AC power).
- Combo offer 320lm output on emergency

#### SOLID-STATUS TRANSFER

- The unit features a solid-state switching transistor which eliminates damaged contacts or mechanical failures. associated with relays.
- The switching circuit is designed to detect a loss of AC power and automatically energizes the lamps. Upon restoration of the AC voltage, the emergency lamps will switch off and the charger will automatically recharge the battery.

#### BATTERY BACKUP

- Emergency unit designed with a maintenance-free Lithium iron phosphate battery provides minimum emergency duration of 2 hours.
  - Recharge time of the battery is 24 hours.
  - Battery have to recharge if product kept in stock 12 months.
- Detailed manual refer to "BATTERY STOCK AND RECHARGE GUIDELINE".

#### Code Compliance

- Suitable for use in 5°C-50°C ambient temperature for damp location.
- CSA listed meets all requirement in C22.2 No. 141-15, C860-11  
comply with ICES-005, suitable for Canadian market.