


PL-04

PENDANT LINEAR UP/DOWN LIGHT (SINGLE/LINKABLE)

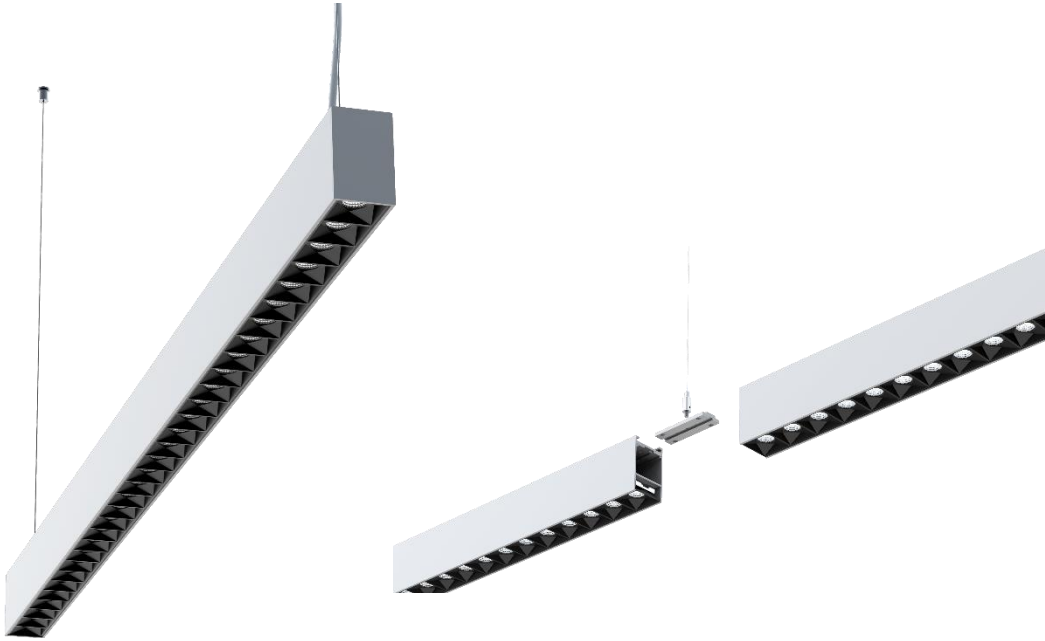


SPECIFICATIONS

Model No.	PL-04	
Power Consumption(±10%)	36W↑/24W↓	42W↑/28W↓
Input Voltage	120VAC/100-277VAC	
Luminous Flux (±10%)	4200lm↑/3250lm↓ (SMD5050) 3500lm↑/2800lm↓ (SMD2835)	4200lm↑/3250lm↓ (SMD5050) 3500lm↑/2800lm↓ (SMD2835)
Correlated Color Temperature	3000K/4000K/6000K	
Color Rendering Index	>80	
UGR level	<15	
Dimming	Yes	
Material	Aluminum body, PC lens	
Finish	Powder Coating	
Fixture Color	White/Silver	
IP Rating	IP20	
Life Time of LED @Ta=25°C	50000 Hours	
Warranty	5 Years	
Application	Classroom, open space office, meeting room and other office applications	

PL-04

PENDANT LINEAR UP/DOWN LIGHT (SINGLE/LINKABLE)


DIMENSIONS

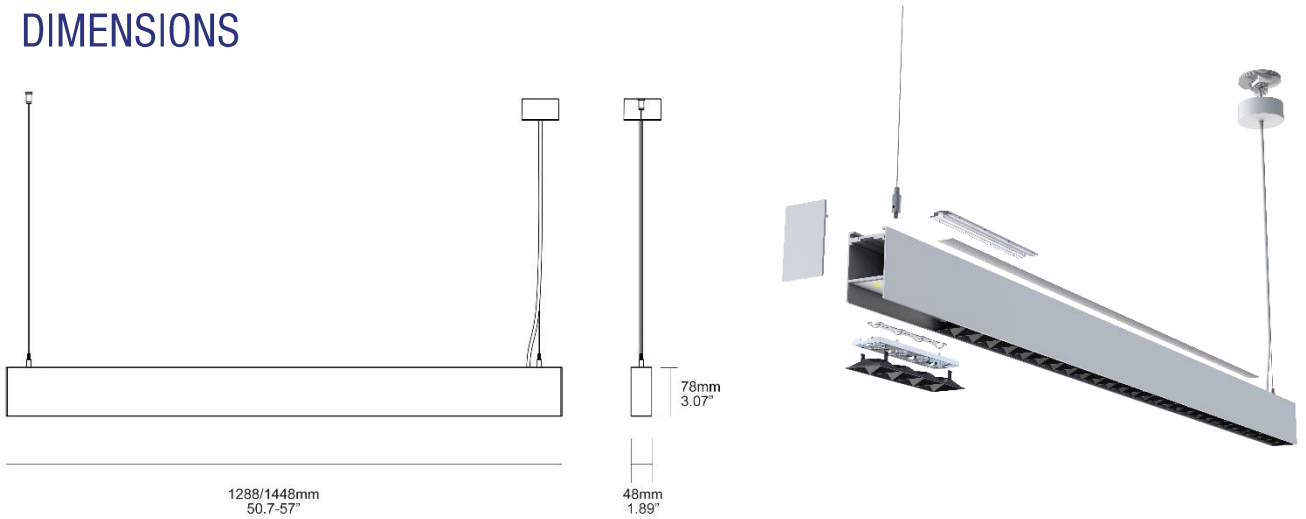

PL-04

PENDANT LINEAR UP/DOWN LIGHT (SINGLE/LINKABLE)

DISTRIBUTION

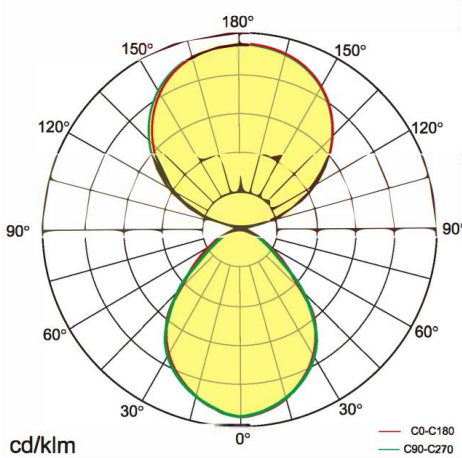

ORDERING INFORMATION

EXAMPLE: PR-PL04-36-24-W-3000-80-T

SERIES	WATTAGE	FIXTURE COLOR	CCT(K°)	CRI	DIMMING
PR-PL04	36-24	W: White	3000	80	D: Dali
	42-28	S: Silver	4000	90	T: Triac
			6000	V: 0-10V	
			4000	O: None	
			5000		