


PL04

PENDANT LINEAR LIGHT SPECIFICATIONS

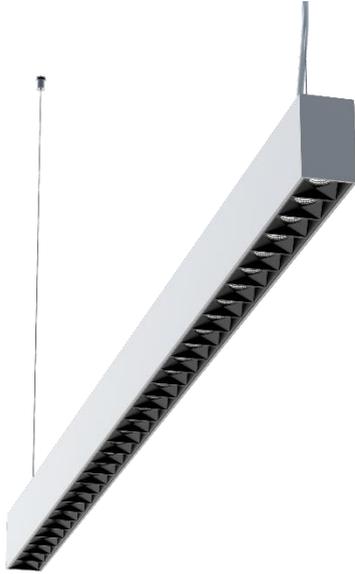

Job Information	
Project Name	
Type	
Location	
Quantity	
Date	

DESCRIPTION

PL04 is a louvered pendant linear fixture engineered for direct illumination—ideal for commercial interiors and workspace environments. Its design balances clean aesthetics with performance, delivering uniform, visually comfortable light in demanding interior settings. The linkable design features micro reflector and anti-glare cover.

OVERVIEW

- Linkable direct linear light
- Simple, easy and quick installation
- Efficient lighting up to 100 LM/W
- Flexible prismatic diffuser
- UGR<18 provides visual comfort

PERFORMANCE




MODEL NAME	PL04
POWER CONSUMPTION(±10%)	30W 35W
LUMINOUS FLUX	3200 LM 3600 LM
EFFICIENCY	UP TO 100 LM/W
INPUT VOLTAGE	120-277VAC
POWER FACTOR	≥0.9
DIMMING	0-10V
CCT	3000K/3500K/4000K/6000K
CRI	>80
UGR LEVEL	<18
BEAM ANGLE	80°
MOUNTING OPTIONS	PENDANT
FINISH	SILVER/WHITE/BLACK
IP RATING	IP20
OPERATING TEMPERATURE	-20°C TO + 45°C (-4°F TO 113°F)
LIFE TIME OF LED @TA=25°C	50000 HRS L80
WARRANTY	5 YEARS
APPLICATIONS	INDOORS

PRODUCT ORDERING GUIDE

EXAMPLE: PL04-30W-3000-V-S

SERIES	WATTAGE	CCT	DIMMING	FINISH
PL04	30W	3000	V: 0-10V	B: BLACK
	35W	3500	N: NONE	S: SILVER
		4000		W: WHITE
		6000		

DIMENSIONS

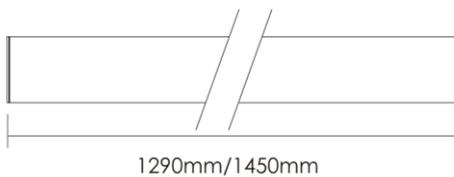

FEATURES

► Optics

80° beam angle, UGR<18
Downward (direct) illumination,

► Electrical

Voltage 120-277VAC

► Environment & Certifications

cETL listed for dry locations

► Warranty

5 years limited warranty

► Mounting

Pendant linkable.

► Finish

The powder-coated finish ensures a uniform appearance, offering long-term durability and superior aesthetics.

► Housing Material


Die-cast aluminum housing ensures durability and efficiency, with heat resistance polycarbonate lens.

► LED System

CRI With a 80+ color rendering index (CRI), this product delivers outstanding illumination, featuring tight chromatically specifications and a precise color binning process to ensure consistency in CRI and CCT.

CCT Available in 3000K, 3500K, 4000K and 6000K with excellent color consistency.

DISTRIBUTION

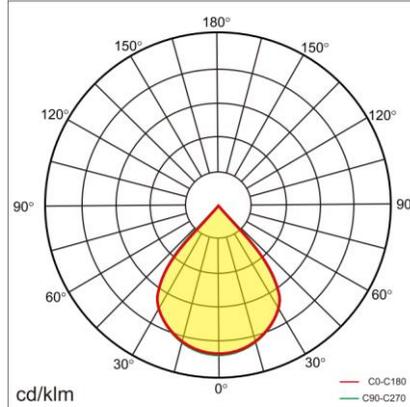

No gap and no light escapes when linked together

Push-in, push-out structure lamp, easy for installation and maintenance

100 lm/W flicker free, CRI>80, SDCM 3, L80 B10 50,000 HRS

80° beam angle direct, UGR<18

Support for smart control functions, 0-10V dimming

PL04

PENDANT LINEAR LIGHT SPECIFICATIONS

