






SINGLE CUT LED SMD STRIP LIGHT

Description:

The LED strip light utilizing SMD 2835 technology presents a versatile lighting solution with a unique advantage: the ability to cut the strip light after each LED. This innovative feature makes this product an ideal choice for any desired length, offering unparalleled flexibility in installation and customization. One of the primary benefits of being able to cut the strip light after each LED is the avoidance of dark spots at the end or start of the line of light By allowing precise customization to fit any space or application, users By allowing precise customization to fit any space or application, users can ensure a seamless and continuous illumination without interruptions or inconsistencies. This capability eliminates the need to rely on predefined lengths, offering complete control over the lighting design and layout.





Optical:

CCT: 2700/3000/3500/4000/5000/6000

Lumen Efficacy: 100lm/W

LED Type: SMD 2835 120LED/M

CRI: ≥80

Electrical:

Rated Power: 5W/M , 10W/M Input voltage: 24 VDC

Input voltage: 24 VDC
PCB Width 10mm
Cuting length 8.3mm 3/8"

Life:

Lumen maintenance: 50,000 Hours

Warranty: 1 Years



General:

Dimmable Solution: 5%-100% dimming capability

Available IP 20 / 65 / 68

Operating temperature: -20°C~40°C(-2°F~105°F)

Certification: cULus







CULUS

SINGLE CUT LED SMD STRIP LIGHT

DRAWING



IINSTALLATION

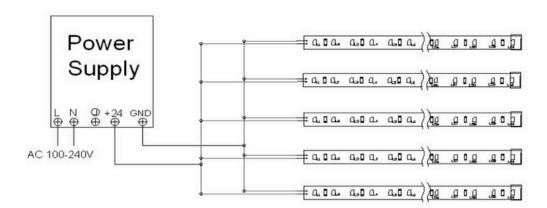

The max running length for each line is 3 meters. Please install the strips in parallel when length is more than 3 meters.

Usually most of the power supply has a efficiency between 80%-95%, so when choosiing the power supply, the total watts of the strips should be smaller than 80% of the rate power of the led strips.

