




Sky Bright Regular

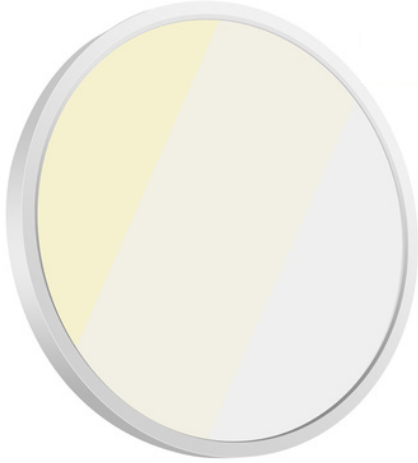

Description:

Introducing our sleek LED Ceiling Surface Mount Light, a perfect blend of style and functionality. With its slim design, this light fixture seamlessly integrates into any space, fitting neatly on a standard ceiling junction box. It offers 3CCT tunable capability, allowing you to adjust the color temperature for the desired ambiance. Additionally, it is dimmable, giving you control over the brightness. Experience the perfect lighting solution that is both stylish and efficient.



Model: SBR

Optical:

CCT:	5CCT, 2700K/3000K/3500K/4000K/5000K
Lumen Efficacy:	90 LM/W
LED Type:	SMD2835 / 56PCS
CRI:	>80

Electrical:

Rated Power:	15W/24W/30W/40W
Input voltage:	120 VAC / 100-277 VAC
Beam angle:	120°
Power factor/THD/PE:	>90% / <30 / 70%

Life:

Lumen maintenance:	50,000hrs
Warranty:	2 Years

General:

Dimmable Solution:	Triac /0-10V
IP:	IP20 / IP44
Operating temperature:	4°F -+104°F
Finish color Availability:	White
Certification:	cETLus





Sky Bright Regular

Model	Power	Voltage	lumens@R80	lumens@R90	Dimming	Size
SBR15-08"	15W	120VAC	1050±10%	900±10%	Triac	Ø208X24 mm
SBR24-12"	24W	120VAC	1920±10%	1600±10%	Triac	Ø293X24 mm
SBR30-16"	30W	120VAC	2400±10%	2100±10%	Triac	Ø397X24 mm
SBR48-24"	48W	120VAC	4050±10%	4050±10%	Triac	Ø600X24 mm
SBR10-08"	10W	100-277VAC	1000±10%	900±10%	0-10V	Ø208X24 mm
SBR15-12"	15W	100-277VAC	1500±10%	1350±10%	0-10V	Ø293X24 mm
SBR25-16"	25W	100-277VAC	2500±10%	2250±10%	0-10V	Ø397X24 mm
SBR40-24"	40W	100-277VAC	4000±10%	3600±10%	0-10V	Ø600X24 mm

Example:SBR1508-120-T-80-S-D



Model & Size	Voltage	Dimming	CRI	installation	Environment
SBR15-08" SBR24-12" SBR30-16" SBR48-24"	120VAC:120	Triac:T	80 90	Surfaces: S Pendant: P	Dry :D Wet:W
SBR10-08" SBR15-12" SBR25-16" SBR40-24"	100-277VAC:UNV	0-10V :10			






Sky Bright Regular

Wide Application

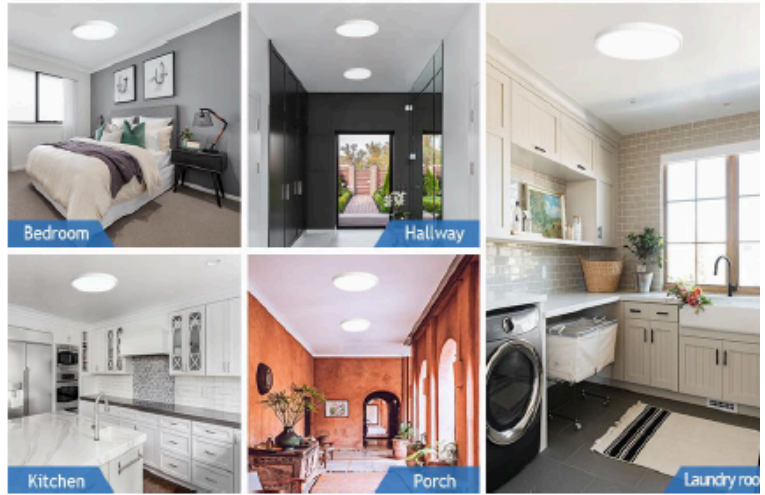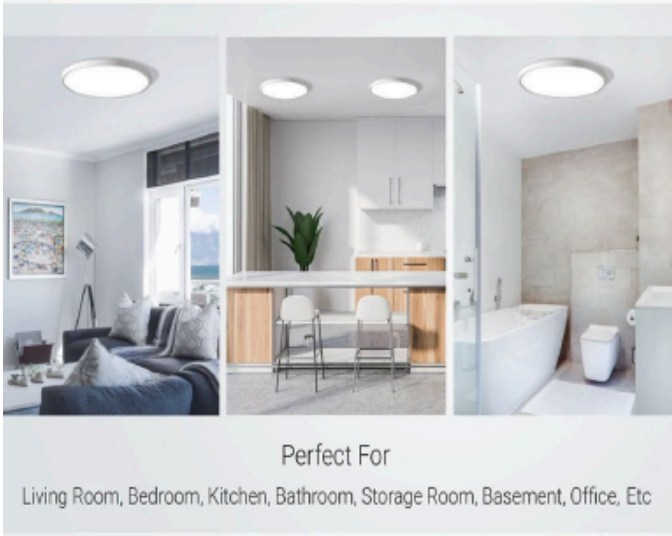



Sky Bright Regular

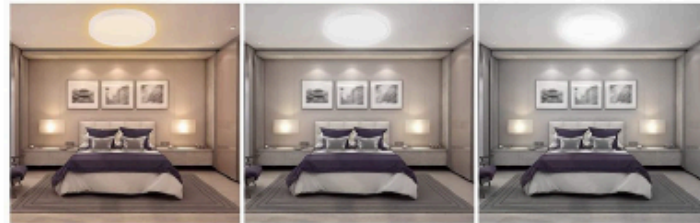



Warm White

Neutral Light

Daylight White



Front light color temperature
3000K 4000K and 5000K adjustable

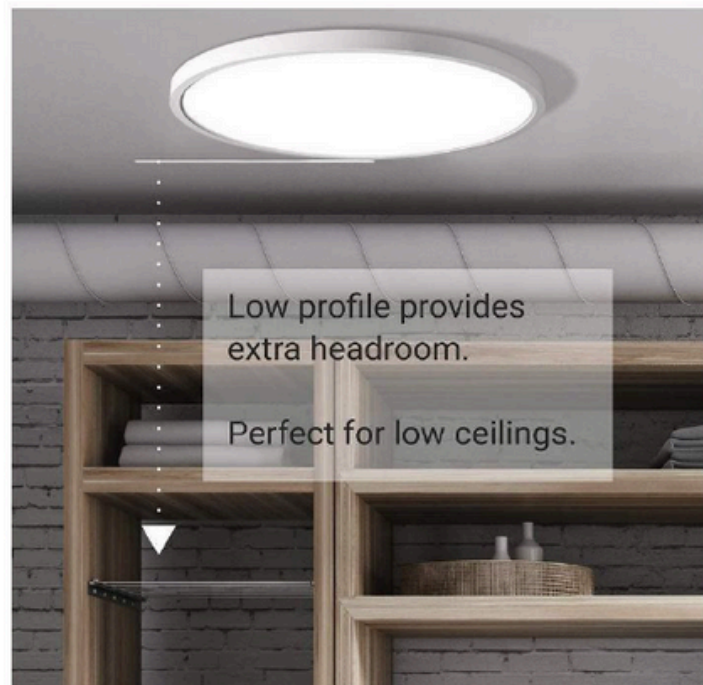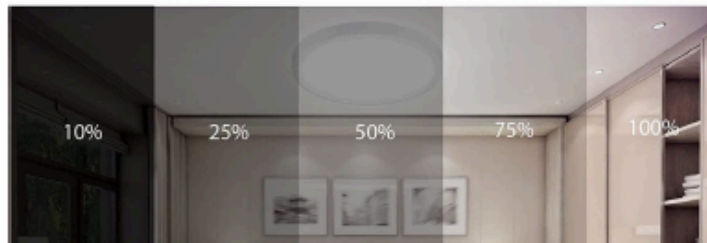

Low profile provides
extra headroom.

Perfect for low ceilings.