



Slima Series

Description:

Slima Series features an ultra-narrow trim design that delivers a near trim less appearance, combined with a deeply recessed lens for smooth, glare-controlled illumination. Engineered with a clean and refined finish, it offers a modern architectural look across a wide range of applications. Available in petite aperture sizes starting from 2" (2.5" outer) with lumen output up to 600 lm, making it an ideal solution for discreet, high-performance lighting. Rated for IC and damp locations, Slima Series supports 120V and 120–277V input with Triac and 0–10V dimming options, providing flexibility for both residential and commercial use.



Model: Slima Series

Optical:

CCT:	5CCT Tunable
Lumen out put::	600-1000-1200LM
CRI:	>90Ra



Electrical:

Rated Power:	7W / 12W / 15W
Input voltage:	AC100-130V /50/60Hz
Beam angle:	36° / (15°/24°)Optional

Life:

Lifespan:	30,000hrs
Warranty:	2 Years

General:

Dimmable Solution:	Triac Dimmable
Type:	IC , Airtight
Material:	Aluminum +PC
Environment :	Dry / Damp Location IP44
Certification:	cETLus





Slima Series

Specefictions

Product Names	1" Round	2" Round	3" Round	4" Round
Model	Slima R1	Slima R2	Slima R3	Slima R4
Power	7W	12W	15W	18W/15W/12W
Lumen	600LM	1000LM	1200LM	1500LM
Voltage	AC100-130V /50/60Hz Or AC100-277V 50/60HZ for Option			
Dimmable	Triac Dimmable Or 0-10V Dimming for Option			
CCT	5CCT Selectable(27K/30K/35K/40K/50K)			
CRI	>90Ra			
Beam Angle	36° (15°/24°optional)			
Dimension:	Φ62*73mm	Φ82*75mm	φ102*90mm	Φ112*90mm
Cutout Size	Φ55mm	Φ75mm	Φ95mm	Φ108mm
Material	Aluminum +PC			



Due to continuous improvements, the information herein may be changed without notice


831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1(604) 770-3315 | E: info@maxtarlighting.com





Slima Series

Specefictions

Product Names	1" Square	2" Square	3" Square	4" Square
Model	Slima S1	Slima S2	Slima S3	Slima S4
Power	7W	12W	15W	18W/15W/12W
Lumen	600LM	1000LM	1200LM	1500LM
Voltage	AC100-130V /50/60Hz Or AC100-277V 50/60HZ for Option			
Dimmable	Triac Dimmable Or 0-10V Dimming for Option			
CCT	5CCT Selectable(27K/30K/35K/40K/50K)			
CRI	>90Ra			
Beam Angle	36° (15°/24°optional)			
Dimension:	62*62*73mm	82*82*75mm	102*102*90mm	115*115*90mm
Cutout Size	55*55mm	75*75mm	95*95mm	108*108mm
Material	Aluminum +PC			

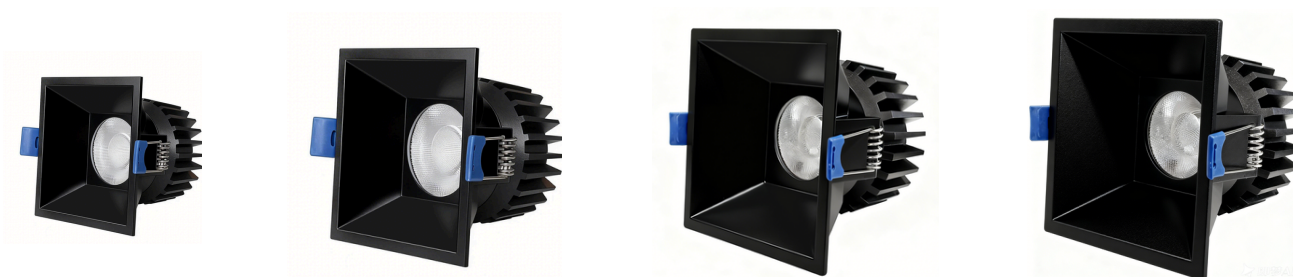



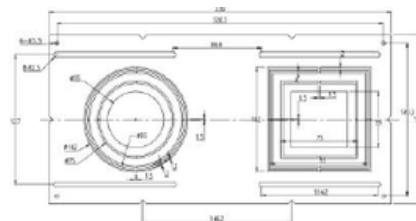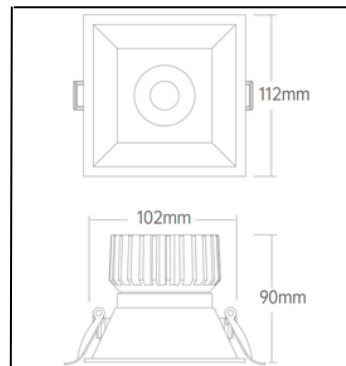

831 3rd St W, North Vancouver, BC V7P 3K7 Canada | P.: +1(604) 770-3315 | E: info@maxtarlighting.com