




Description:

The LED Vapor Proof Jelly Jar is a durable, energy-efficient lighting solution designed for industrial and outdoor environments. Featuring a vapor-proof housing that protects against dust, water, and chemicals, it delivers reliable, bright illumination with low power consumption. Impact-resistant and easy to install, this versatile fixture is ideal for harsh conditions, making it perfect for warehouses, parking garages, and other demanding applications.





Optical:

CCT: 3000K,3500K,4000K,5000K

Lumen Efficacy: 120LM/W With Frosted lens ,150LM/W With Clear lens

LED Type: COB and SMD 3030

CRI: Ra>75



Electrical:

Rated Power: 30W/20W/15W/10W, Power selectable

Input voltage: 100-277VAC

THD: <20% 4KV Surge Protection

Power factor: >0.95

Life:

Lumen maintenance: 50,000hrs L70 Warranty: 5 Years

General:

Dimmable Solution: (0 -10V)
IP: IP65

Housing: 6063 Anodized Aluminum Housing
Installation: Surface Mounted, Wall Mounted
Application: Stairwell, Passageways, Parking Lot

Certification: cETLus







Specification

Model	Power Selectable	Voltage	Single CCT	lens	lens Lumens	
VTJ-F	10W 15W 20W 30W	120-277 VAC	3000K-3500K-4000K-5000K	Frosted	1200lm 1800lm 2400lm 3600lm	
VTJ-C	10W 15W 20W 30W	120-277 VAC	3000K-3500K-4000K-5000K	Clear	1450lm 2175lm 2900lm 4350lm	

Ordering Table:


Example:VTJ-D-03-DS-W-F

Model	Dimming	LED	ССТ	Options	Lens
VΤJ	ON/OFF : None 0-10V: D	SMD:S COB:C	3000K:03 3500K:35 4000K:40 5000K:50	Low Bay Motion Sensor :LS High Bay Motion sensor :HS Day light Bi-level motion sensor :DS Photocell : P Wire Guards :W	Frosted :F Clear: C






Fixture details

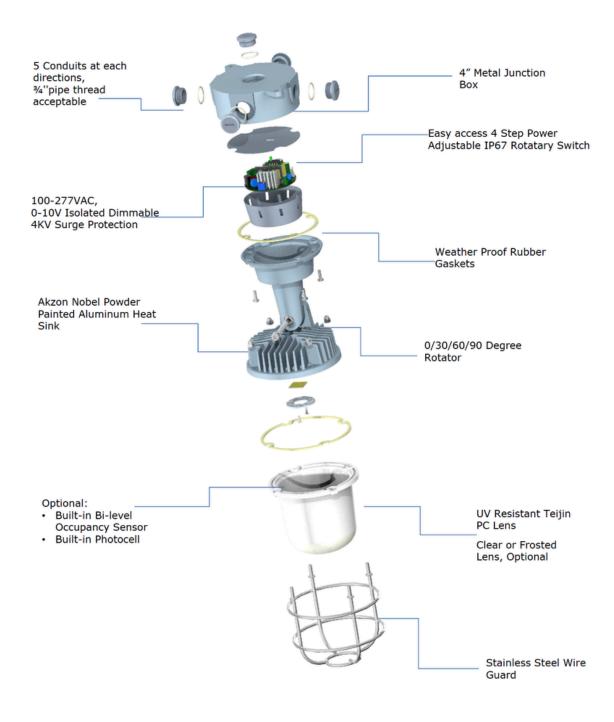







DIMENSION:



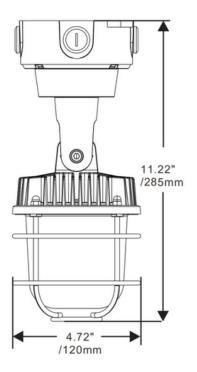


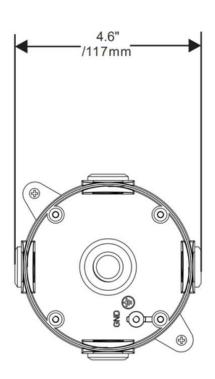






INSTALATION

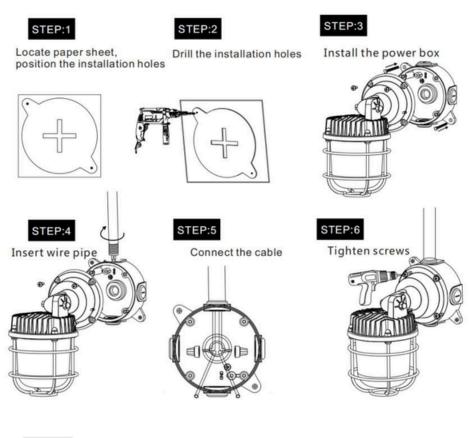

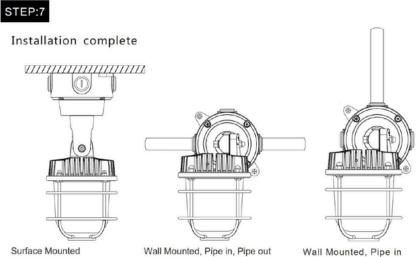





APPLICATION











